



插頭部件 (Plug Component)			頭部剥皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部剥皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內制(Strip)	外制(Roj)	顏色(Color)		外制(Roj)	內制(Strip)	顏色(Color)	零件描述(Component)	顏色(Color)	數量(Q'ty)
35P透明 90±2μ Clear	FM-2 (10A 125V-) (NEMA5-15P)	1	10±1	60±2	黑/Black(L)	SJT 18AWG/3C 105°C 黑色(Black) 線長: (Length) 1841.5 ^{+50.8} _{-12.7}	15±1	5 ⁺¹ ₋₀	黑/Black(L)	ME-302 (10A 125V-) (IEC 320 C13)	35P透明 90±2μ Clear	1
鍍鎳 Nickel-Plated	□4.75 U型圓管 □4.75 Grounding	1	10±1	60±2	白/White(N)		15±1	5 ⁺¹ ₋₀	白/White(N)	電腦電源線端子 (Computer power cord terminals)	銅本色(Copper)	3
鍍鎳 Nickel-Plated	6.3*1.5 單片圓頭端子 (Solid Blades)	2	20±1	75±2	綠/Green(E)		15±1	5 ⁺¹ ₋₀	綠/Green(E)	302兩件式內模 (302 Inner Body)	白色(White)	1
鍍鎳 Nickel-Plated	墊片 (Gasket)	3										

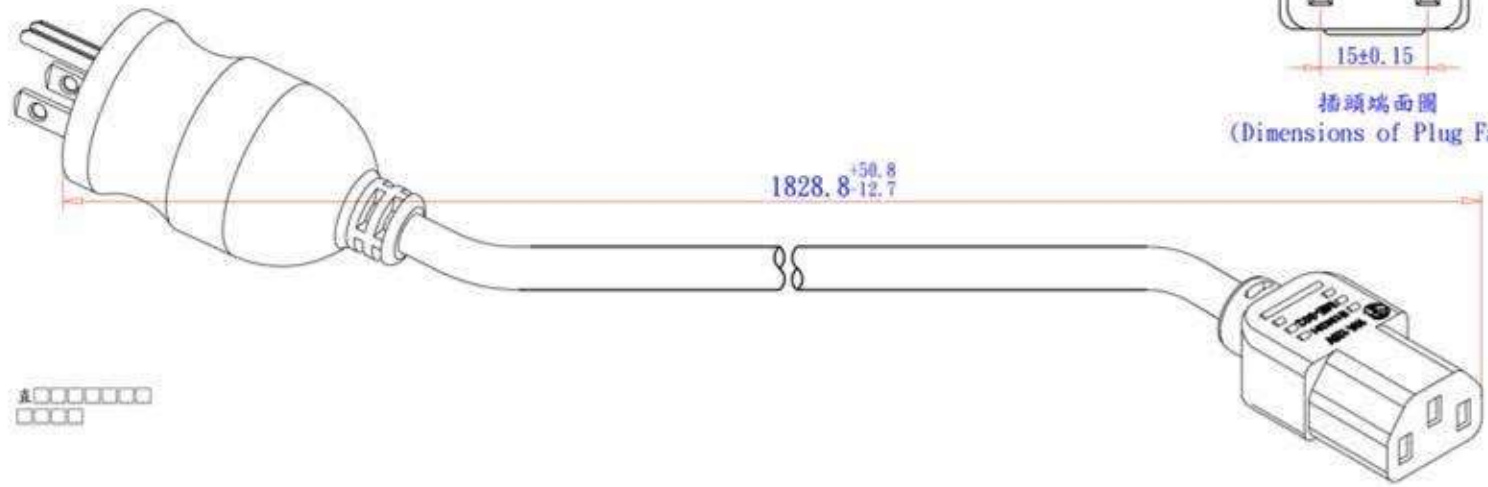

插頭端面圖 (Dimensions of Plug Face)




插頭端面圖 (Dimensions of Plug Face)

Insulation Thickness 0.76 mm
Overall Diameter 2.70±0.10 mm

Copper Conductor
41/0.160±0.004 mm
Resistance 22.4 (20°C Max), ohms/km

Jacket Thickness 0.76mm
Overall Diameter 7.8±0.15mm



線材截面圖 (Wire Cross-Section)

包裝方式(Packing)	
扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X
包裝數量 (Packing Qty)	PCS
標籤 (Label)	UL Detachable Label
正側事項 (Carton Print)	依客戶要求印刷 (See Purchase Order)
電線印字內容 (Wire Printed)	使用克實 線材 四印字 (Un-Filler, Grasure)
V E322763 (UL) SJT 18AWG(0.824mm ²)x3C VW-1 105°C 300V /FT c(UL) SJT 18AWG(0.824mm ²)x3C FT2 105°C 300V -1F- (UL) SJT 18AWG(0.824mm ²)x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 18AWG(0.824mm ²)x3C FT2 105°C 300V LL43774 -F- -1F-	紙箱事項標記 Shipping Mark
	◊CnC◊

SIGNATURE	NAME	DATE
APPROVED		
M.F.G. CHECKED		
Q.A. CHECKED		
DRAWN	楊承正	2011/11/28

REV	DATE	DESCRIPTION	SYMBOL
00	2011 1128	新版發行	楊承正
PART No.		800-18-00D-BL-0006F	
DWG No.			

SIZE:	A4
UNIT:	mm
SCALE:	1:1
PROJ.	

CnC Tech, LLC
Industrial Cable and Connector Technology