



2600 MHz Cavity Bandpass Filter

Part Number: AB2600B711



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Electrical specifications

- Center frequency (Fo):** 2600 MHz
- Insertion loss@Fo:** =/ <1.5 db
- Ripple:** =/ <0.5 dB
- Return loss@Fo:** =/ >15 dB
- Rejection frequency on low side(Fs-):** 2150 MHz
- Rejection frequency on low side(Fs+):** 3050 MHz
- Attenuation at Fs-:** =/ >40 dB
- Attenuation at Fs+:** =/ >40 dB


Mechanical

- Mounting Method:** Threaded Mounting Holes
- Connector Type:** SMA female
- Dimensions:** 2.32" x 2.16" x 1.42" in

Environmental

- Operating Temperature:** -45 to +85° C
- Storage Temperature:** -55 to +95° C
- Shock:** 20 G. 11ms
- Vibration:** 20 G. 5 to 200 Hz

Outline Drawing:

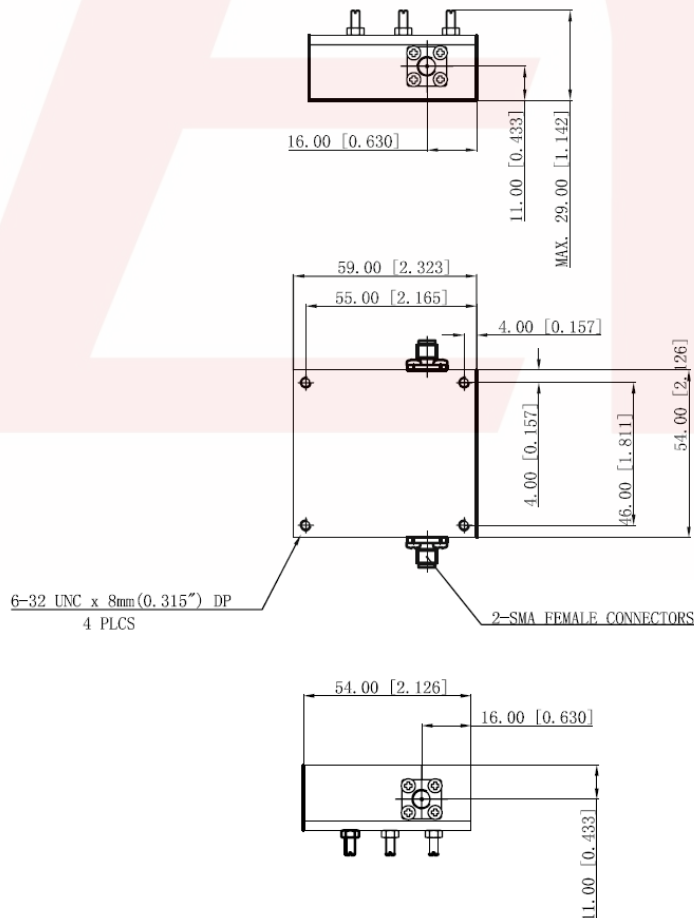

DS-B711-03152018-Rev0




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2600 MHz Cavity Bandpass Filter

Part Number: AB2600B711



Plot:

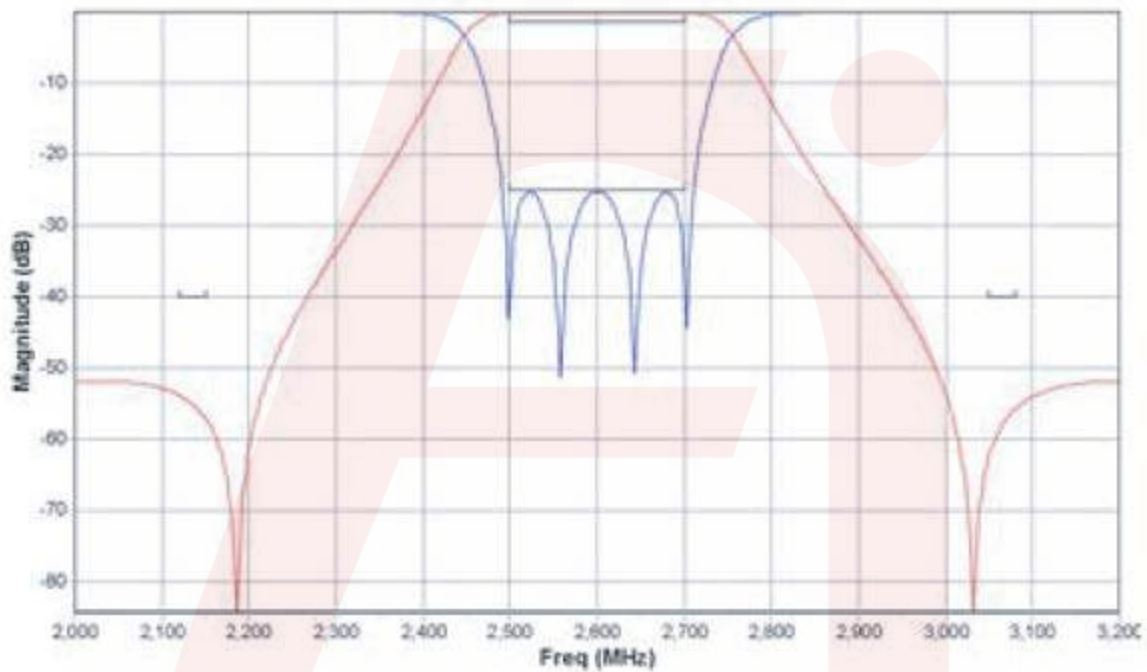

DS-B711-03152018-Rev0