

# Surface Mount High Pass Filter

## RHP-700+

50Ω      700 to 3000 MHz

### The Big Deal

- Low insertion loss
- High rejection
- Good return loss



Generic photo used for illustration purposes only  
CASE STYLE: GP1212

### Product Overview

RHP-700+ is a 50Ω high pass filter fabricated using SMT technology. This high pass filter covers from 700-3000 MHz. This filter is built with high Q capacitors and air-coil inductors for superior performance. This filter is developed for square kilometer array telescope systems for radio astronomy. It has repeatable performance across lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Low insertion loss	Can be used in high performance applications such as radio astronomy.
Good rejection	This enables the filter to attenuate spurious signals and reject harmonics for broad frequency band.
Small size, 0.35" x 0.35" x 0.15"	The small surface mount package enables the RHP-700+ to be used in compact designs.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount High Pass Filter

50Ω 700 to 3000 MHz

## RHP-700+



Generic photo used for illustration purposes only  
CASE STYLE: GP1212

### Features

- Low insertion loss
- High rejection
- Good return loss


### Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Stop Band	Rejection Loss	DC-F1	DC-500	20	30	-	dB
	VSWR	DC-F1	DC-500	-	20	-	:1
Pass Band	Insertion Loss	F2-F3	700-3000	-	0.6	2.0	dB
	VSWR	F2-F3	700-3000	-	1.5	1.8	:1

### Applications

- Radio telescope applications
- Aeronautical / aviation
- Wireless communications service
- Maritime

### Functional Schematic

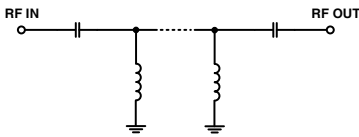

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5 W max.

Permanent damage may occur if any of these limits are exceeded.





### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	99.92	434.30
280	51.65	347.44
500	35.33	48.26
540	17.82	28.03
575	7.77	9.74
600	3.11	3.65
618	1.49	2.08
638	0.79	1.42
700	0.42	1.06
1000	0.20	1.12
1320	0.17	1.16
1670	0.16	1.19
1870	0.15	1.16
1990	0.14	1.12
2200	0.13	1.06
2380	0.15	1.07
2540	0.17	1.14
2760	0.23	1.26
2900	0.29	1.35
3000	0.33	1.41

### Typical Frequency Response



**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

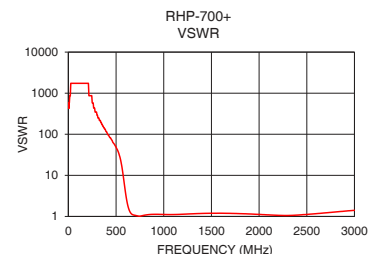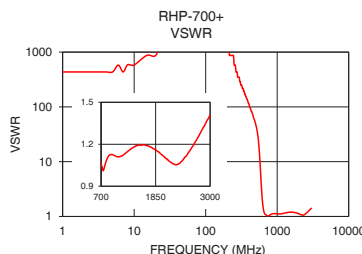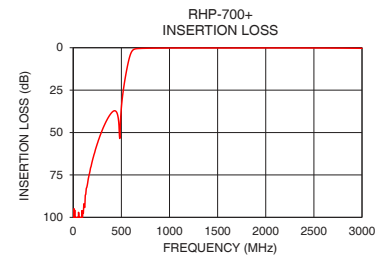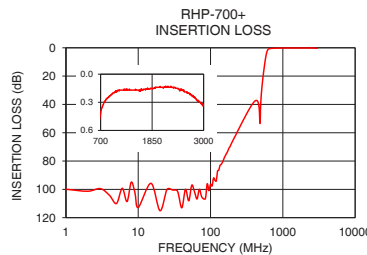

### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Pad Connections

INPUT	2
OUTPUT	6
GROUND	1, 3, 4, 5, 7, 8


**Demo Board MCL P/N: TB-332**  
**Suggested PCB Layout (PL-176)**

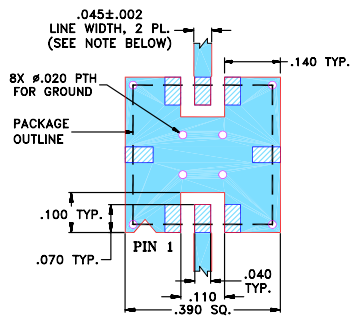

- NOTES:** 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Drawing

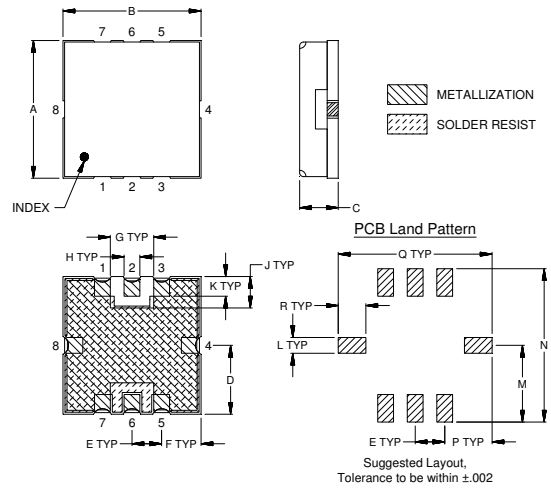

## Outline Dimensions (inch)

A	B	C	D	E	F	G	H	
.350	.350	.150	.175	.075	.100	.110	.040	
8.89	8.89	3.81	4.45	1.93	2.54	2.79	1.02	
J	K	L	M	N	P	Q	R	Wt.
.080	.050	.040	.195	.390	.120	.390	.070	grams
2.03	1.27	1.02	4.95	9.91	3.05	9.91	1.78	.50

*Note: Please refer to case style drawing for details*

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)