




DO NOT SCALE


DIMENSIONS IN MM.



C.A.D. FILE CODE  
S. C344989.A

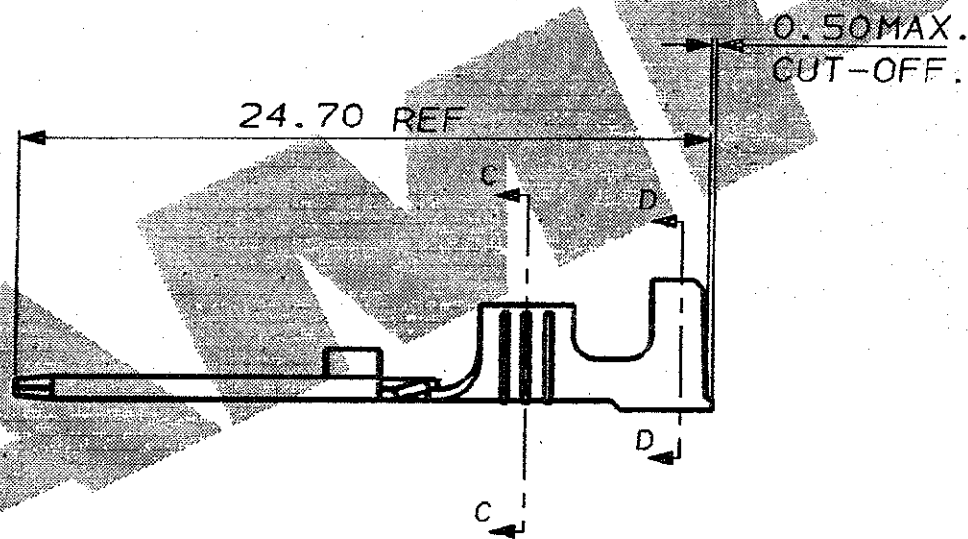

SECTION C C.

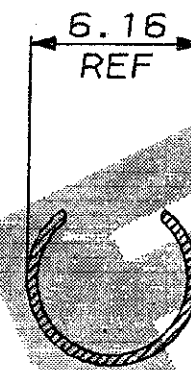

SECTION D D.


WIRE RANGE 2.00 TO 3.00 MM<sup>2</sup>  
 INS. RANGE 4.10 TO 5.50 MM DIA. INC. SEAL  
 (ONLY THIN WALLED CABLE 2.60 TO 3.40 MM DIA. IS SUITABLE)

PRODUCT SPEC. 108-3069

APPLICATION SPEC. 114-3036

H/TOOL PN.525316-1 (FOR 2mm<sup>2</sup> AND 2.5 TO 3mm<sup>2</sup> WIRES)

SEALED APPLICATIONS ONLY

PRE-TINNED BRASS		MADE FROM STRIP PN.344008-1		344989-1	
FINISH		MATERIAL		PART NUMBER	
CUSTOMER DWG FOR REFERENCE ONLY		© COPYRIGHT 1991 BY AMP OF GREAT BRITAIN LTD. ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING.		RELEASED FOR PUBLICATION 25 SEP 1991	
-	-	TOLERANCES UNLESS OTHERWISE STATED :		DR. R.J.S. 25.9.91	
-	-	DEC ± 0.5		CH. <i>W. W. W.</i> 26/11/91 APP. J.P.	
-	-	ANGLES ± 1°		 TERMINAL HOUSE STANNORE MIDDX.	
-	-	NAME .250 SERIES TAB (LOOSE PIECE) ECONOSEAL 3 H.C. (SEALED)			
A	E800-0041-01	14.02.01	SCALE	LOC	SIZE
1	PRELIM. ISSUE	25.9.91	4/1	E	A3
REV	APPROVED	ECN	DATE	DWG.No.	REV
				C344989	A
					SHEET
					1/1