### S41F1C-P08MFG0-200S


# series\_f, type\_s4




#### **General information**

Part number	S41F1C-P08MFG0-200S
Termination	solder
Size	1
Locking principle	push
Coding	1_halfshell
Cable Diameter	cable_mini_20
Cable outlet	bend_relief





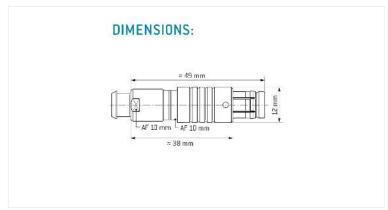

## Contact insert description

Number of contacts	8
Contact type	pins
Contact diameter	07mm
Insulator material	peek
Wire cross section	22_awg
Termination	solder
Termination diameter	085mm

 $reverse\_gender\_on\_request$ 

### **Technical information**

Max. creepage and air clearance distance	04 <sub>mm</sub>	07 <sub>_</sub> mm
Nominal current single contact	075_a	iec_60512_5_2
Nominal current insert	4,875 A	vde_0298_4
Test voltage	09 kv ac	sae 13441

safety\_text

### Mechanical and environmental data

Degree of protection*	ip68
Operating temperature	40_120_c
Mating cycles	5000

mated

### Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety\_text\_2 ul\_text illustrative\_text