



## ERPAC CA 10BO (no buttons option)

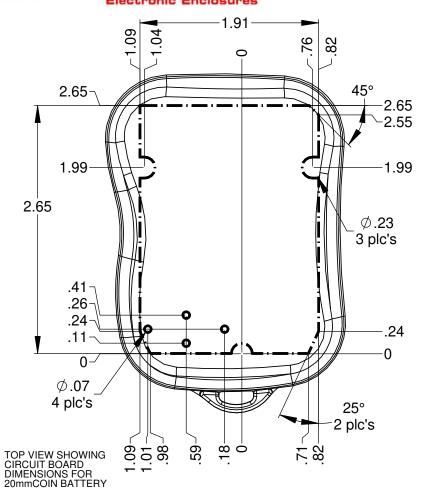

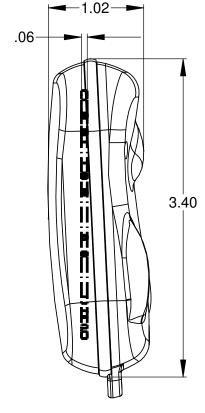

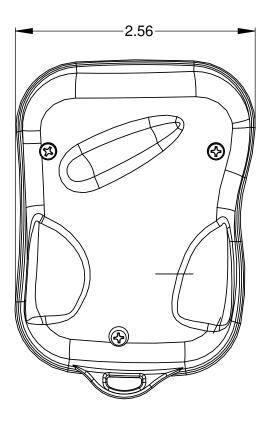



BOTTOM-


#2 SCREWS

PN 6008-

-(B) COIN

BATTERY HOLDER

`─20mm COIN BATTERY



## **NOTES:**


1) Serpac Provides the following components:
Top, Bottom, Button Membrane, 9mm keyring and (2) #2 Screws.
All components are shipped unassembled.

2) The switches characteristics recommended for this enclosure are:
- 4.3 mm in height from mounting surface to top of push plate.
- Operating force recommended is 1.6 N or more.

3) For battery contacts use:
- for Coin battery Keystone 3003 positive and 2990 negative

ALL DIMENSIONS ARE ± .010" 2009 Wright Ave, La Verne, CA 91750 Ph:(626) 331-0517 Fx: (626) 331-8584 www.serpac.com

## CA10BO (no buttons, AAA option) **Electronic Enclosures**

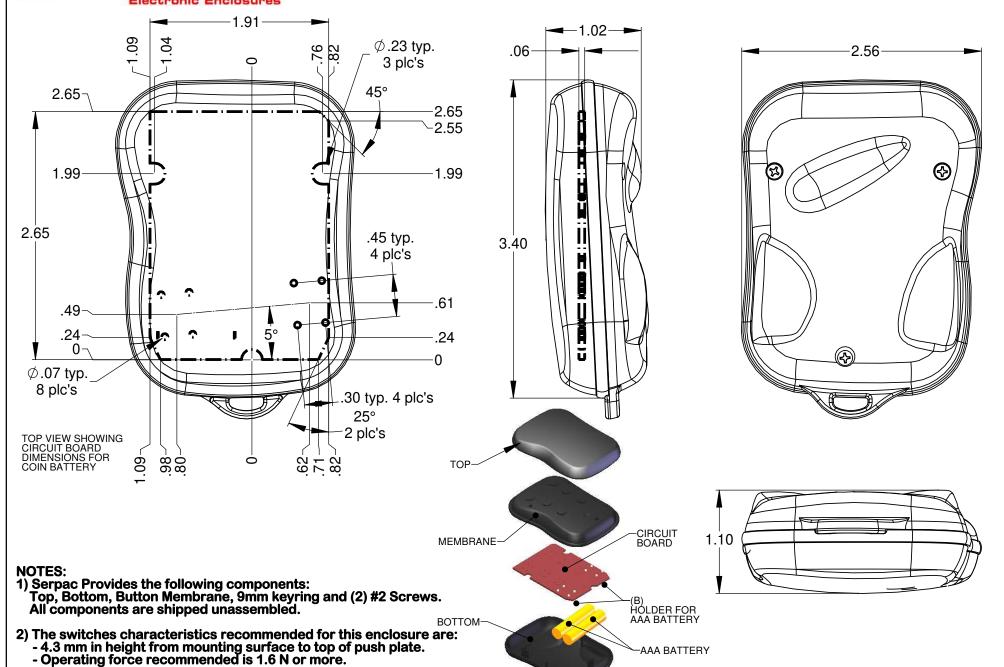

#2 SCREWS PN 6008—

ALL DIMENSIONS ARE ± .010"

Ph:(626) 331-0517 Fx: (626) 331-8584 www.serpac.com

2009 Wright Ave, La Verne, CA 91750

3) For battery contacts use:
- for (2) AAA Batteries use Keystone 82 (2 per battery)