
4-282832-0 - ACTIVE

## Buchanan

TE Internal #: 4-282832-0 PCB Terminal Blocks, Header, Wire-to-Board, 6 Position, .197 in [5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board

#### View on TE.com >

#### Connectors > Terminal Blocks & Strips > PCB Terminal Blocks

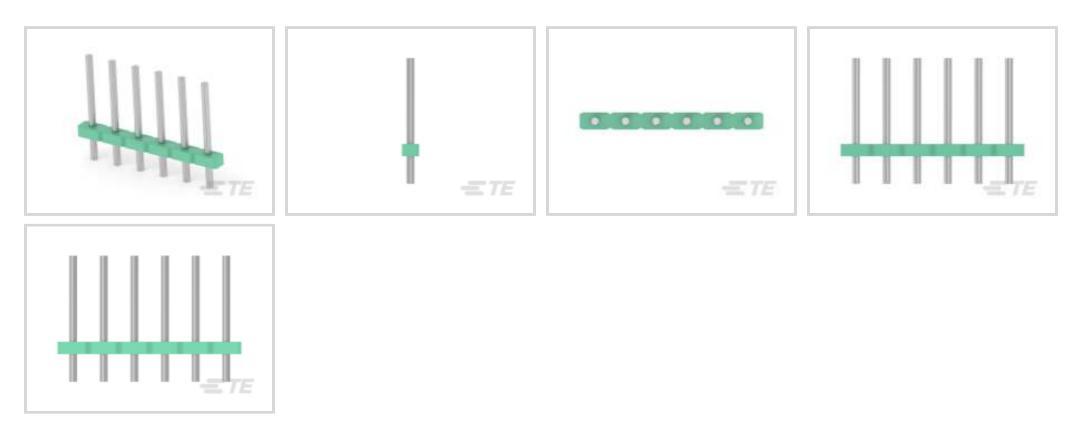

Terminal Block Connector Type: Header

Connector System: Wire-to-Board

Number of Positions: 6

Centerline (Pitch): 5 mm [.197 in ]

Number of Rows: 1

# Features

**E** 

### Product Type Features

| Header Type                       | Unshrouded            |
|-----------------------------------|-----------------------|
| Terminal Block Connector Type     | Header                |
| Connector System                  | Wire-to-Board         |
| Connector & Contact Terminates To | Printed Circuit Board |
| Configuration Features            |                       |
| Stacking Configuration            | Side Stackable        |
| Number of Positions               | 6                     |
| Number of Rows                    | 1                     |
| Electrical Characteristics        |                       |
| Operating Voltage                 | 300 VAC               |
| Body Features                     |                       |
| Primary Product Color             | Green                 |
| Product Orientation               | Vertical              |

#### 4-282832-0

PCB Terminal Blocks, Header, Wire-to-Board, 6 Position, .197 in [5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board



## **Contact Features**

| Contact Mating Area Length                  | 7 mm[.275 in]              |
|---|----------------------------|
| Contact Mating Area Plating Material        | Tin                        |
| Contact Base Material                       | Brass                      |
| Contact Current Rating (Max)                | 15 A                       |
| Termination Features                        |                            |
| Termination Post & Tail Length              | 3.5 mm[.138 in]            |
| Termination Method to Printed Circuit Board | Through Hole - Solder      |
| Termination Method to Wire & Cable          | Push-in                    |
| Mechanical Attachment                       |                            |
| Connector Mounting Type                     | Board Mount                |
| Housing Features                            |                            |
| Housing Material                            | PA 66                      |
| Centerline (Pitch)                          | 5 mm[.197 in]              |
| Usage Conditions                            |                            |
| Operating Temperature Range                 | -40 - 105 °C[-40 - 221 °F] |
| Operation/Application                       |                            |

#### **Operation/Application**

| Circuit Application  | Power & Signal   |
|--|--|
| Packaging Features   |  |
| Packaging Quantity   | 100  |
| Packaging Method   | Box  |
| <b>Product Compliance</b><br>For compliance documentation, visit the product page on TE.com> |  |
| EU RoHS Directive 2011/65/EU   | Compliant  |
| EU ELV Directive 2000/53/EC  | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016  | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006   | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JAN 2023<br>(233)<br>Does not contain REACH SVHC |
| Halogen Content  | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC  |

**C** For support call+1 800 522 6752

#### 4-282832-0

PCB Terminal Blocks, Header, Wire-to-Board, 6 Position, .197 in [5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board



Free

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Customers Also Bought**




TE Part #3-641216-5 05P MTA100 HDR ASSY FL/RA LF

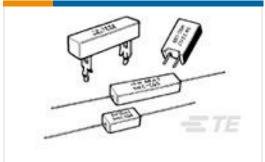

TE Part #1-1623789-6 SQM7 4R7 5% (WIRE)



TE Part #644753-4 04P MTA156 HDR ASSY RN STR F/L

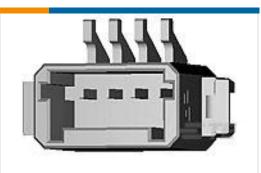

TE Part #2106091-3 4 pos Inverted Thru Board SMT Header



## Documents

#### **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_4-282832-0\_H.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_4-282832-0\_H.3d\_igs.zip

English

Customer View Model

#### 4-282832-0

PCB Terminal Blocks, Header, Wire-to-Board, 6 Position, .197 in [5 mm] Centerline, 1 Row, Operating Voltage 300 VAC, Printed Circuit Board



#### ENG\_CVM\_CVM\_4-282832-0\_H.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

# Datasheets & Catalog Pages BUCHANAN TERMINAL BLOCKS CATALOG - EUROSTYLE TERMINAL BLOCKS

English

Agency Approvals

UL

English