



Electrical Specifications

Center Frequency: 5770 MHz
1dB Bandwidth: 80 MHz
Pass Band: 5730-5810 MHz
Insertion Loss at Center Frequency: 2.0 dB Max
Return Loss: 14 dB Min
Rejection: ≥65 dB @ 5710 MHz
 ≥65 dB @ 5830 MHz
Power Handling: 20 W Max


Mechanical

Connector Type: N-Type (F)
Dimensions: 5.83 x 2.46 x 1.18 Inches

Environmental

Environment Class: IP67
Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

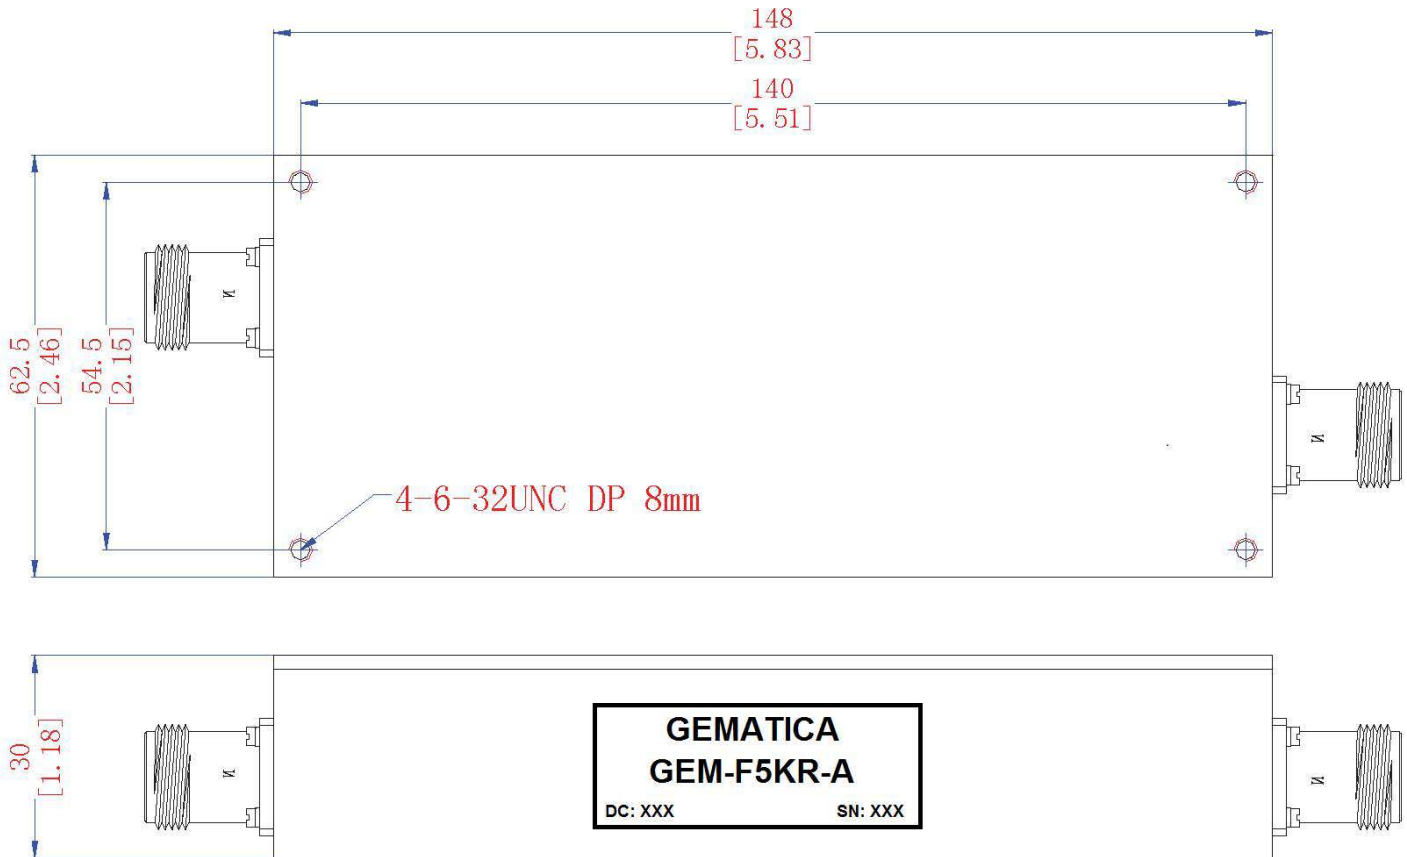



Response Plot:

