



Ceramic SMD Crystals 5032SX Series

Model CA

4 PADS 5.0 X 3.2

Frequency Range : 8.00MHz to 125.00MHz

Features :

- High reliability & low cost unit
- Tight stability & extended temperature available
- Lead-free type
- For automotive applications, please contact our sales representatives




QUARTZ CRYSTALS

Standard Specifications	Item	Value
Frequency Range		8.00MHz to 125.00MHz
Frequency Tolerance		±20ppm, ±30ppm (or specify)
Frequency Tolerance over Temperature range		±20ppm ±30ppm
Operating Temperature Range		-20°C to +70°C -40°C to +85°C
Operable Temperature Range		-40°C to +90°C
Drive Level		50uW Typ (200uW Max)
Load Capacitance		8pF (or specify)

ESR Table	Frequency Range (MHz)	Standard ESR (Ohm)
	8.00 ~ 13.99	150
	14.00 ~ 19.99	120
	20.00 ~ 25.99	100
	26.00 ~ 54.00	60
	40.00 ~ 125.00 (30/T)	120

Dimension

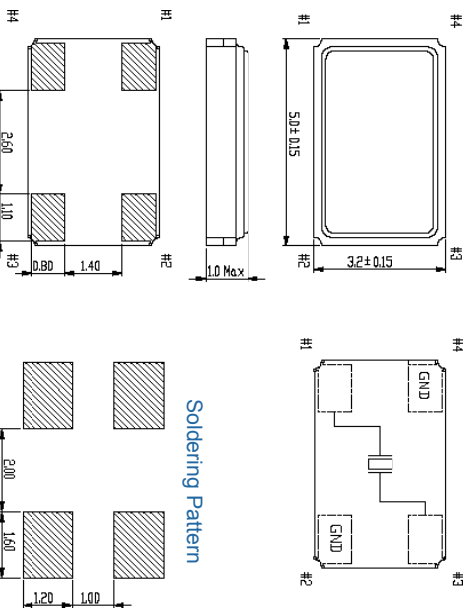

Soldering Pattern

Note :

1. Manufacturer reserves the right to change the specification and content of this product for improvement without notification.
2. Custom specification is welcome. Please contact our sales representative for further details.
3. If the crystal is intended for applications which have direct impact on human life and properties, and require a high degree of reliability and safety concerns, customers must provide full information such as but not limit to the application, electrical and reliability specification at the inquiry beginning stage.
4. Customers have to agree to the "Guideline for handling crystal units" and "Standard Terms and Condition of Sales" which is printed this catalog before placing orders to our company or our distributes. There are also unpredictable factors such as applied condition, oscillation margin and etc and customers must check them beforehand. In case of queries, please do not fail to send inquiry to our company before ordering.

