

Ŧ	۵	П	m	D	C C



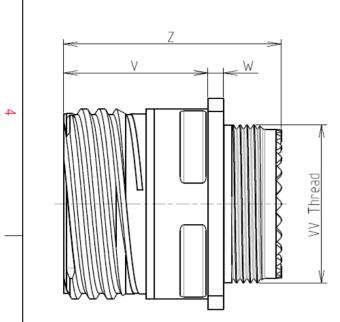

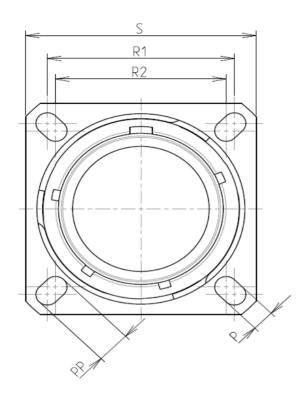

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Mass

Н

ယ


-Standard : Based on MIL-DTL-38999 Series III


	-Shell Material	: Stainless Steel		
22	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered without Souriau contacts			
	-Temperature Range	65°C to +200°C		
	-Salt Spray	: 500 hours		


G

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

Е



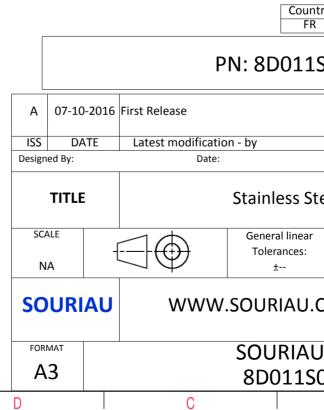

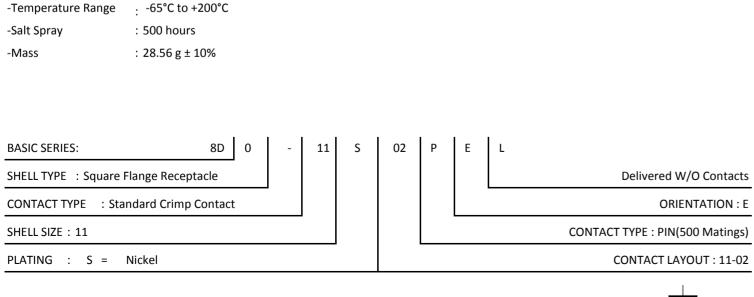

F

σ		A		
				4
AS EXAMPLE				3
any non-conformi which does not co er of the Parties or l ndation, technical n untry Jurisc R 1SO2PEL	mply with by a third par	ty		2
	CUSTOME	R DRAWING	MOD N°	
Steel Receptacle 8D series				
ar		<sup>/</sup> PROJECT 5 <b>9</b>		
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1
U DRG N° S02PEL-C	1		SHEET	
B		A	,	J
2				

	т	۵	г	m	D	0
		Contact Layout				Panel Cuto
4	.x .0 (2.	+Y IB IA IA IA IA IA IA IA +X (2.4imm)			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Con posi IE A B Shell Arrangement size no. 11 -2	tion X-axis Y-axis (mm) (mm) A + 0.95 (2.41) + .000 (.00) B095 (2.41) +.000 (.00)	et m		<u>.</u>	Dim
ى ك						ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an due to a use of the Products wi the Specifications issued by either o (professional recommenda
22						PN: 8D011S
					ISS DATE Designed By:	16 First Release Latest modification - by Date:
_ <b>_</b>					SCALE NA	General linear Tolerances:
					SOURIA	
	Н	G	F	E	FORMAT A3	SOURIAU 8D011S0
		. <b>ч</b>		\		· · · · ·

