


成型尺寸	公差
5mm以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm以上	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY
△ 1.18	CHANGE TO 1.2	91.06.11	S.J.C.

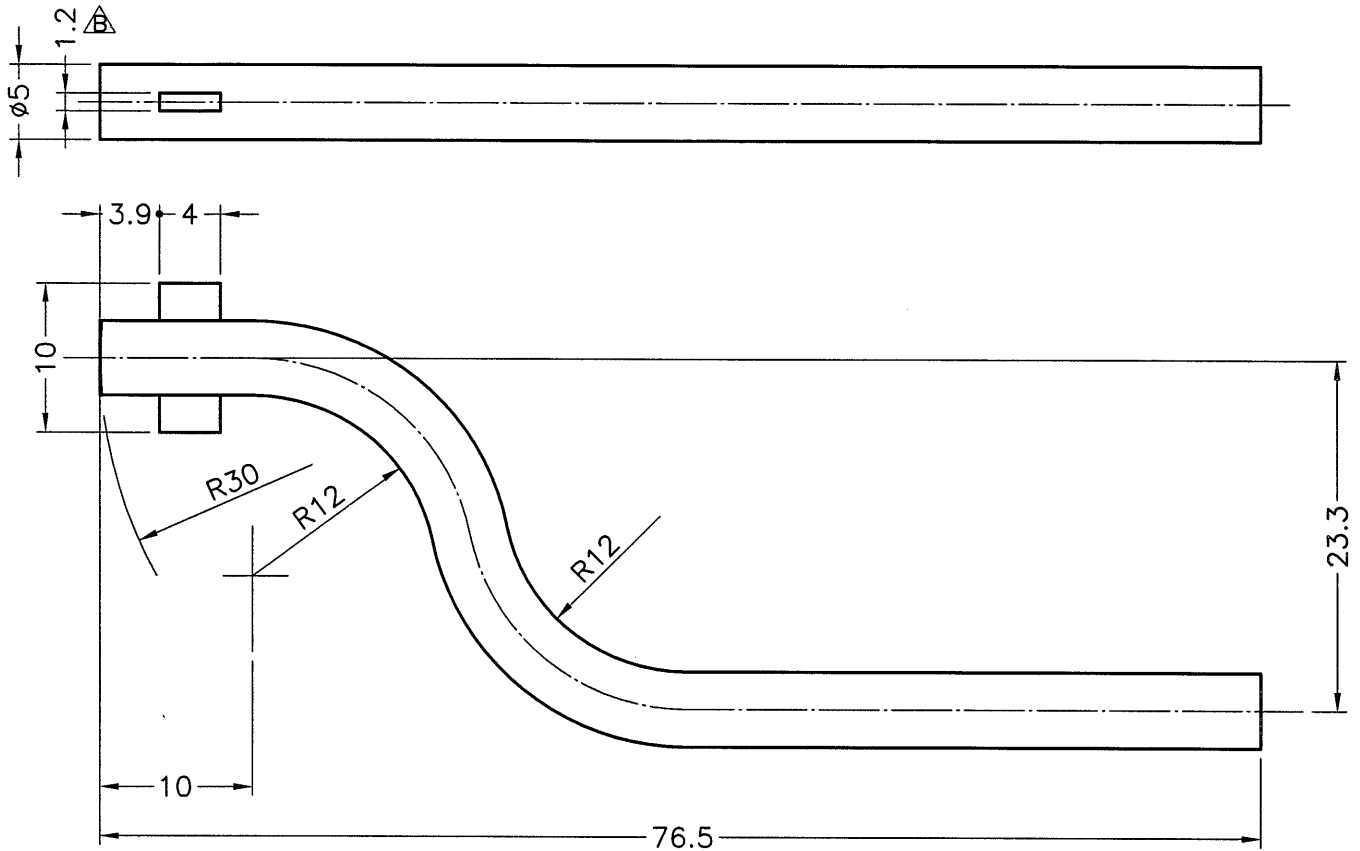

QMFZ2 Component - Plastics

Friday, October 24, 2003

E54695

MITSUBISHI RAYON CO LTD
6-41 KONAN 1-CHOME MINATO-KU TOKYO 108-8506 JAPAN

Material Designation: MF

Product Description: Polymethyl Methacrylate (PMMA), designated "Shinkolite-P, Acrypet" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	1.5	HB	3	0	50	50	50	-	-
	3.0	HB	3	0	50	50	50	-	-

CTI: -

HVTR: -

D495: -

IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁹ohm-cm): -

Dimensional Stability(%): -

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (°C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

Report Date: 1/13/1976

Underwriters Laboratories Inc®

UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

<p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 東莞康揚塑膠五金電子廠 DONG GUAN KANG YANG PLASTIC HARDWARE COMPANY 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.</p>				TITLE	導光柱	產品規格圖面	
				MATERIAL	PMMA	DATE	2002.06.11
				FINISH	表面拋光	DRAWN	S.J.C.
				COLOR	NATURAL	CHECK	
PART NUMBER	LPG-2	DRAWING NUMBER	LPG-2	UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED	
SIZE	A4	SCALE	2:1	UNIT	mm	REV	B