
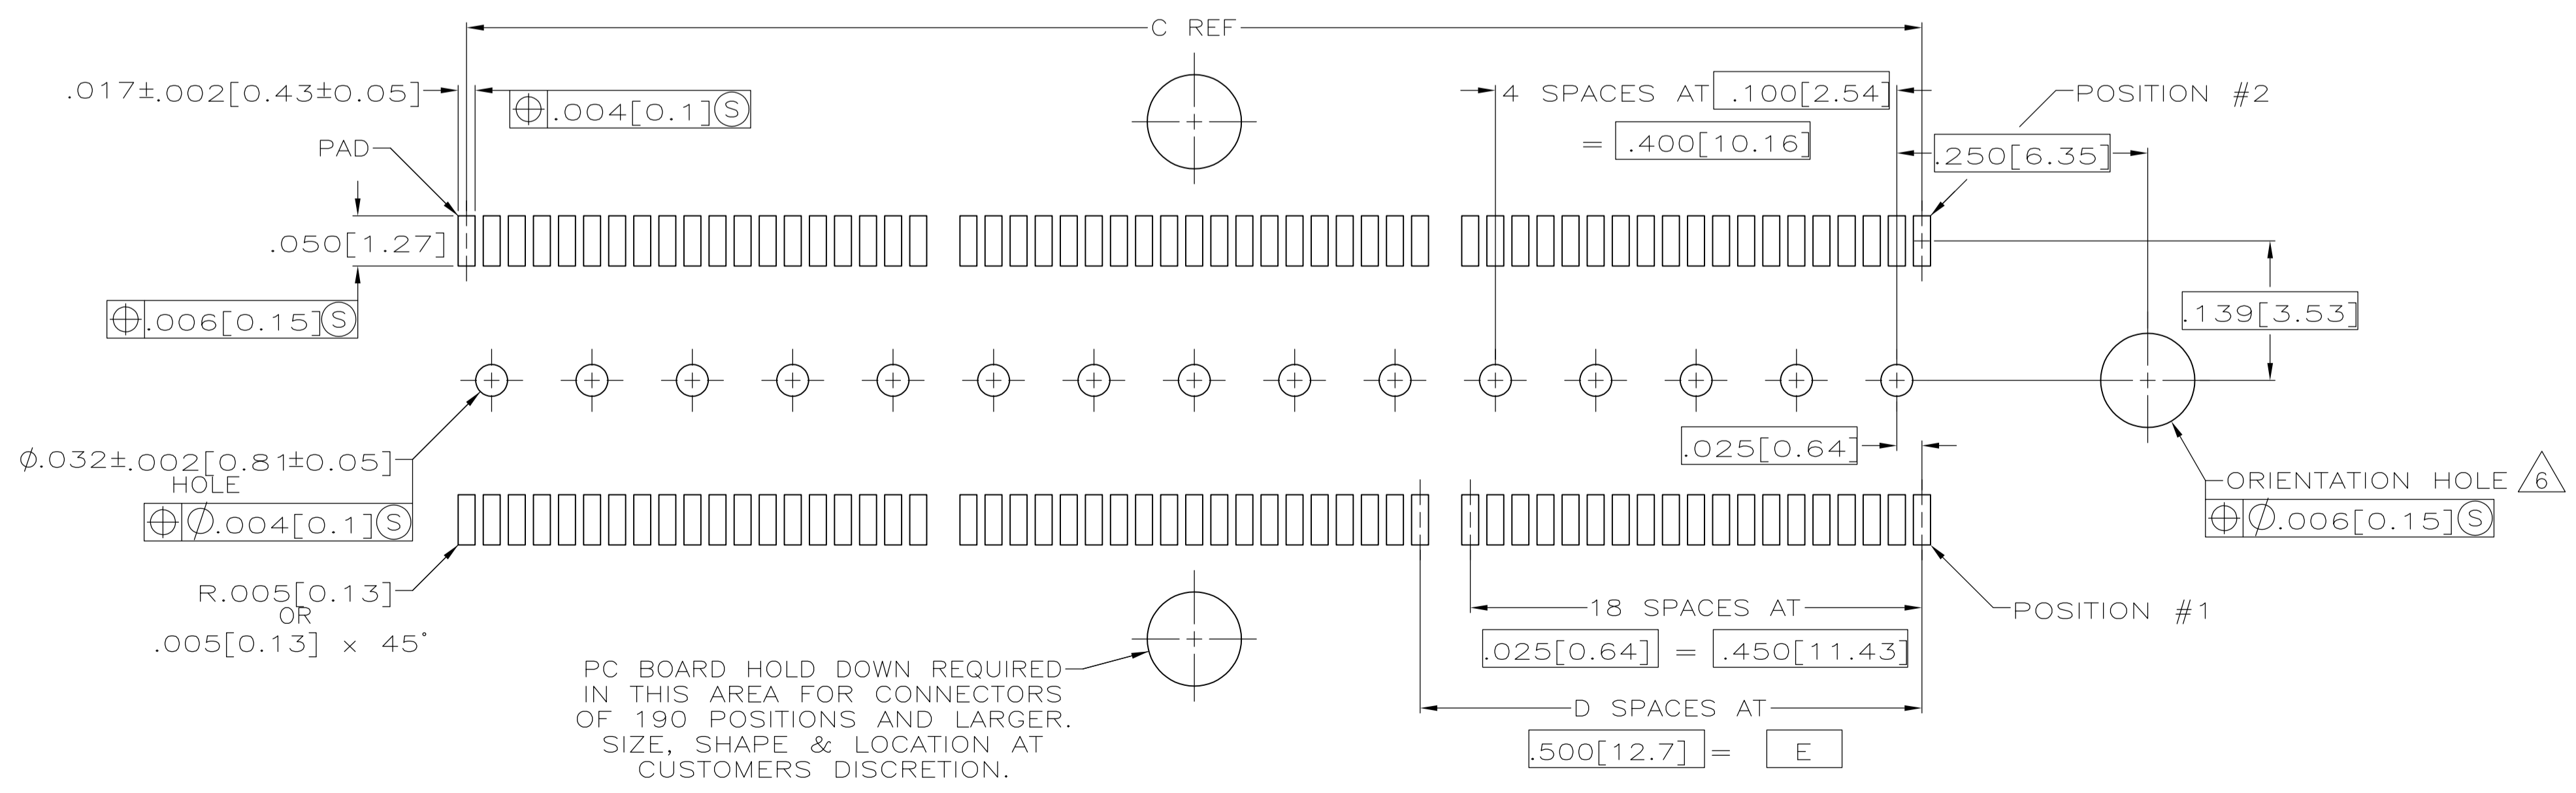


- 1 HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: BRASS, UNS C26000
- 2 CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- 3 DATE CODE MARKED IN AREA INDICATED ON SAME SIDE AS POSITION #1.
- 4 ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- 5 TOLERANCE NON-ACCUMULATIVE.
- 6 FOR STANDARD APPLICATIONS, ORIENTATION HOLE TO BE $\phi .094 \pm .002 [2.39 \pm 0.05]$.
FOR SLIP-FIT APPLICATIONS, ORIENTATION HOLE TO BE $\phi .079 \pm .001 [2.00 \pm 0.03]$.

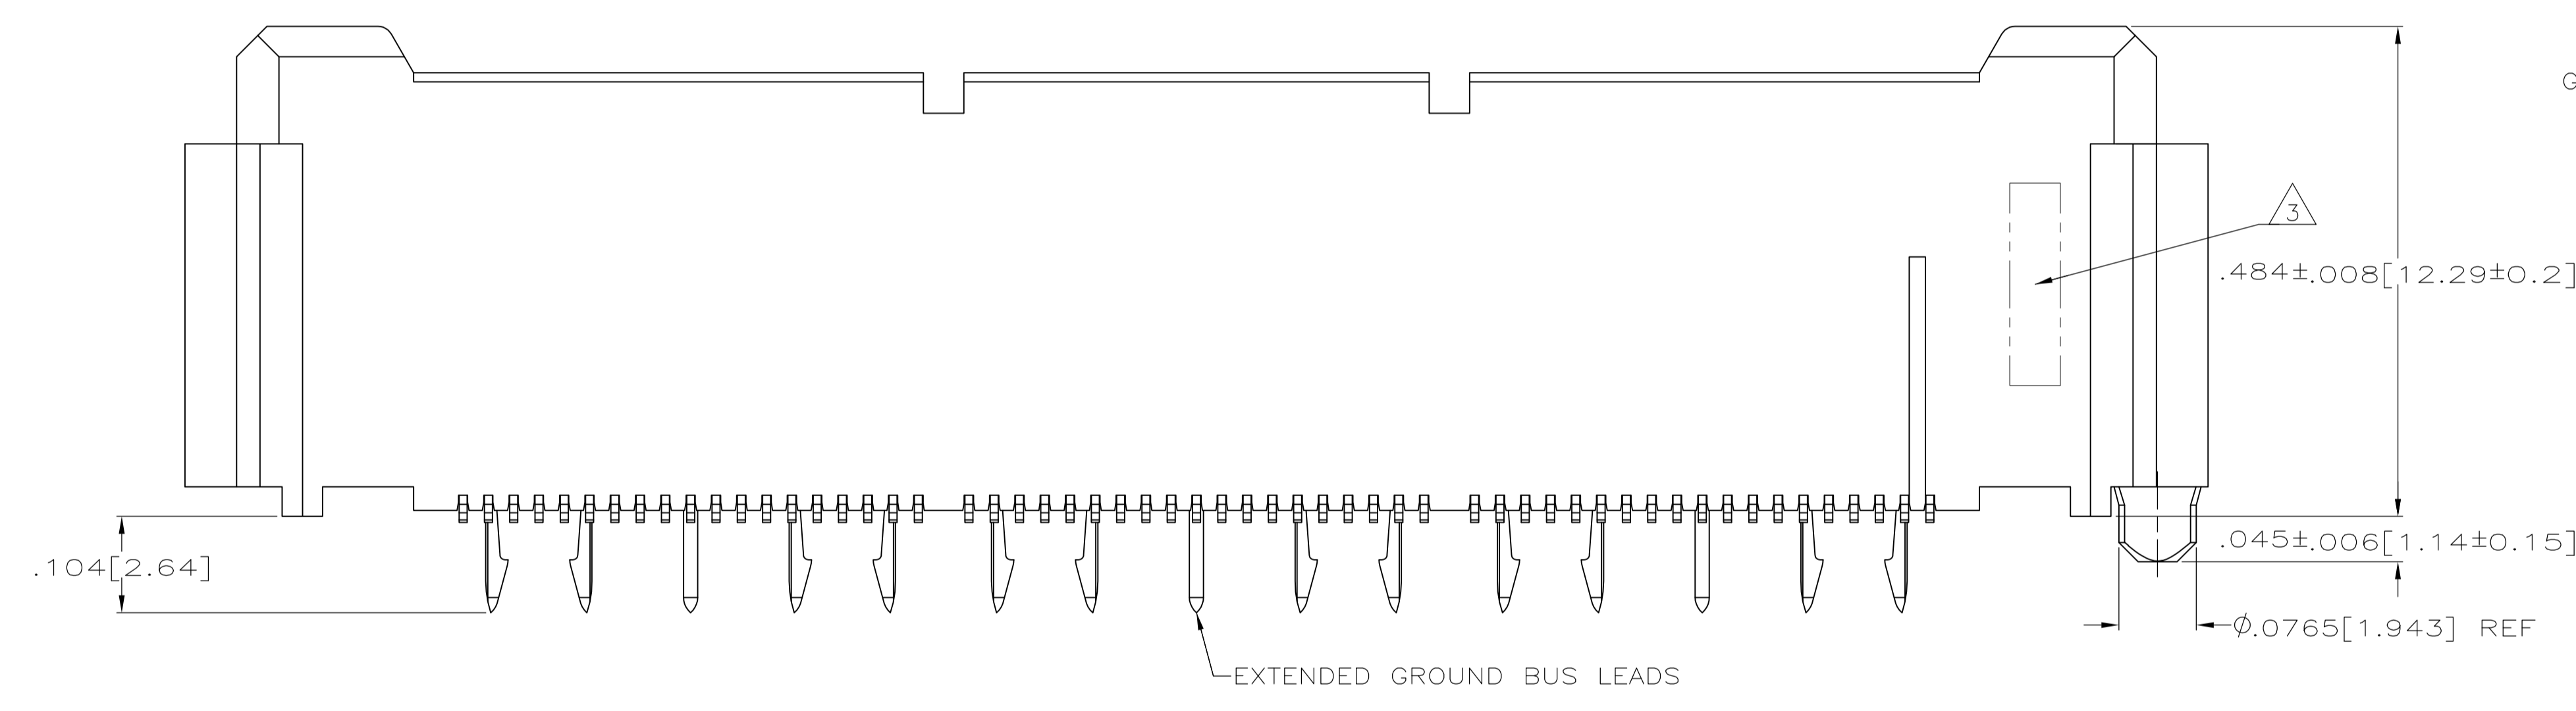

RECOMMENDED PC BOARD LAYOUT (VIEWED FROM CONNECTOR SIDE)

3,000 [76.2]	6	3,450 [87.63]	3,898 [99]	4,000 [101.6]	266	767057-7
2,500 [63.5]	5	2,950 [74.93]	3,398 [86.31]	3,500 [88.9]	228	767057-6
2,000 [50.8]	4	2,450 [62.23]	2,898 [73.61]	3,000 [76.2]	190	767057-5
1,500 [38.1]	3	1,950 [49.53]	2,398 [60.91]	2,500 [63.5]	152	767057-4
1,000 [25.4]	2	1,450 [36.83]	1,898 [48.21]	2,000 [50.8]	114	767057-3
.500 [12.7]	1	.950 [24.13]	1,398 [35.51]	1,500 [38.1]	76	767057-2
.000 [0]	0	.450 [11.43]	.898 [22.81]	1,000 [25.4]	38	767057-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J.GERACE 23AUG96	STE TE Connectivity
DIMENSIONS: INCHES[mm]		CIK P.MATAR 23AUG96	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A.MONK 23AUG96	NAME
0 PLC ± -	1 PLC ± -	PLUG ASSEMBLY, .495 [12.57] VERTICAL, .025 [0.64] CL, GULL WING LEADS, MICTOR	
2 PLC ± -	3 PLC ± .005 (0.13)	APPLICATION SPEC 108-1422	
4 PLC ± -	ANGLES ± -	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1	2	114-11004	
MATERIAL FINISH		WEIGHT	
CUSTOMER DRAWING		A1 00779 ©=767057	
SCALE 8:1		SHEET 1 OF 1 REV S1	