


NOTES: UNLESS OTHERWISE SPECIFIED

LTR		DESCRIPTION	REVISIONS	DATE	APPROVED

- P/N: 9205-HS
INSULATOR: HEAT SHRINK TUBING 221. BLACK.
BODY: BRASS. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. 40μ [1.02μm] MIN GOLD OVER NICKEL PLATED.
- P/N: 9202COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
- P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
- PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

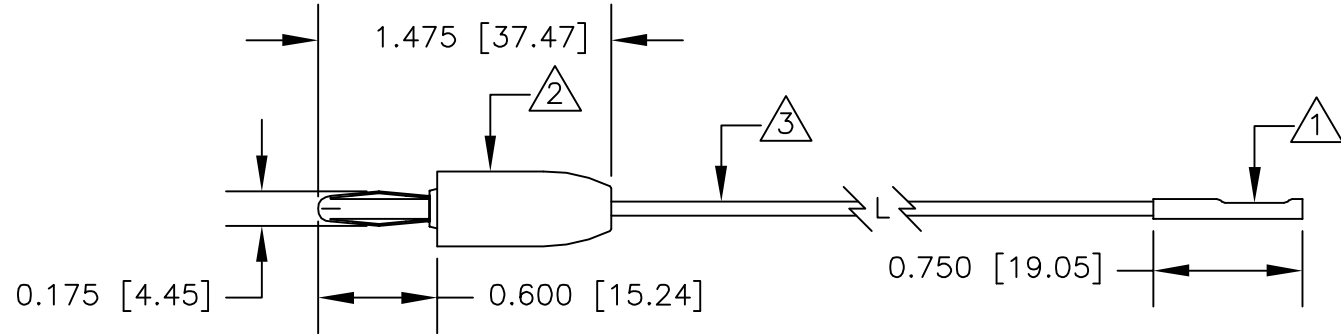

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±		CONTRACT NO.		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.			
MATERIAL SEE NOTE.		APPROVALS					DATE
FINISH SEE NOTE.		DRAWN		10/10		DESCRIPTION	
NEXT ASSY		USED ON		APPROVED BY		0.025 [0.64] SQ. SOCKET TO STD BAN PLUG (9202)	
APPLICATION		DO NOT SCALE DRAWING		SIZE		CODE IDENT NO.	
				A		08505	
				DRAWING NO.		9166	
				SCALE		SHEET 1 OF 1	
				1:1			