
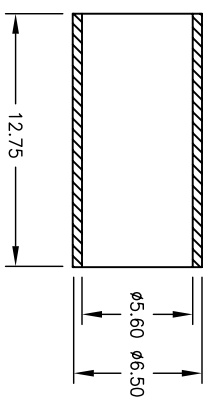
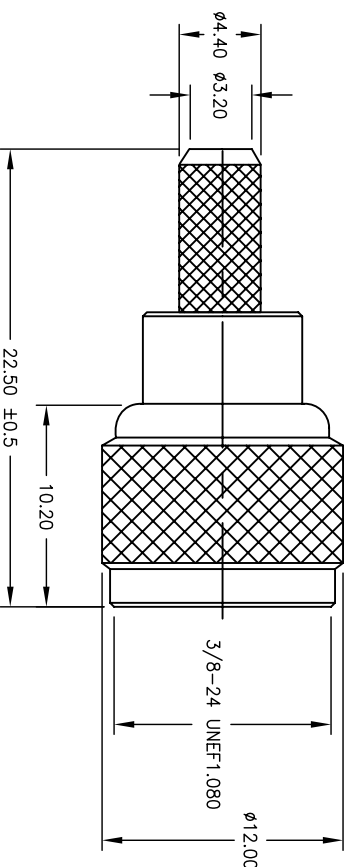


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/5/06	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



NO	Description	Qty	Material	Finish
5	SHELL	1	BRASS	NICKEL
4	FERRULE	1	BRASS	NICKEL
3	DIELECTRIC	1	DELIRIN	NONE
2	PIN	1	BRASS	GOLD
1	BODY	1	BRASS	NICKEL

**SPECIFICATIONS**

**Electrical**

Nominal Impedance: 50 Ohms  
 Frequency Range: 0 – 4 GHz  
 Maximum Peak Voltage: 500V  
 Insulation Resistance: 5000 Mohms min @ 500 VDC  
 Dielectric Withstanding Voltage: 1500 VAC rms.  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235 for 5 sec.



**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

MINIATURE UHF, MALE CRIMP,  
 50 OHM, FOR RG58

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		DRAWN		SS		10/5/06	
INCHES		CHECKED		DATE		TITLE	
X	± .10	ØX	± .10	REF: RF9-01-D-01-50			
.XX	± .020	ØXX	± .015	SCALE: NTS			
.XXX	± .015	ØXXX	± .010	SHEET 1 OF 1			
APPROVALS		APPROVED		REV.			