

Solid Tantalum Surface Mount TANTAMOUNT[®], Molded Case, Hi-Rel COTS, Low ESR, Built-In-Fuse



FEATURES

- Terminations: 100 % matte tin, standard, tin/lead available
- Molded case available in three case sizes
- Compatible with "High Volume" automatic pick and place equipment
- High ripple current carrying capability
- Meets EIA 535BAAC case sizes
- Weibull grading and surge current test options per MIL-PRF-55365
- Standard and low ESR options
- Compliant to RoHS Directive 2002/95/EC
- Moisture sensitivity level 1


RoHS*
COMPLIANT

Note

* Pb containing terminations are not RoHS compliant, exemptions may apply

PERFORMANCE CHARACTERISTICS

www.vishay.com/doc?40088

Operating Temperature: - 55 °C to + 125 °C
(Above 85 °C voltage derating is required)

Capacitance Range: 0.47 µF to 470 µF

Capacitance Tolerance: ± 10 %, ± 20 %

Voltage Rating: 4 V_{DC} to 50 V_{DC}

ORDERING INFORMATION								
T86	D	107	K	010	E	A	A	S
TYPE	CASE CODE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	TERMINATION/PACKAGING	RELIABILITY LEVEL	SURGE CURRENT	ESR
	See Ratings and Case Codes Table	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	K = ± 10 % M = ± 20 %	This is expressed in V. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V).	C = Matte tin/ 7" (178 mm) reel H = Matte tin/ 7" (178 mm), 1/2 reel E = Tin/lead/ 7" (178 mm) reel L = Tin/lead/ 7" (178 mm), 1/2 reel	A = 1.0 % B = 0.1 % S = Hi-Rel standard Z = Non-ER	A = 10 cycles at + 25 °C B = 10 cycles at - 55 °C/+ 85 °C S = 3 cycles at + 25 °C	S = Std. L = Low

DIMENSIONS in inches [millimeters]							
CASE CODE	EIA SIZE	L	W	H	P	T _w	T _H (MIN.)
C	6032-28	0.236 ± 0.012 [6.0 ± 0.30]	0.126 ± 0.012 [3.2 ± 0.30]	0.098 ± 0.012 [2.5 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.087 ± 0.004 [2.2 ± 0.10]	0.039 [1.0]
D	7343-31	0.287 ± 0.012 [7.3 ± 0.30]	0.169 ± 0.012 [4.3 ± 0.30]	0.110 ± 0.012 [2.8 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.094 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]
E	7343-43	0.287 ± 0.012 [7.3 ± 0.30]	0.169 ± 0.012 [4.3 ± 0.30]	0.157 ± 0.012 [4.0 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.094 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]

RATINGS AND CASE CODES								
μF	4 V	6.3 V	10 V	16 V	20 V	25 V	35 V	50 V
0.47								C
0.68								C
1.0								C
1.5							C	C
2.2						C	C	C/D
3.3						C	C	C/D
4.7					C	C	C/D	D
6.8				C	C	C	D	D/E
10			C	C	C	C/D	D/E	
15		C	C	C	C/D	D	D/E	
22		C	C	C/D	D	D/E	E	
33		C	C/D	C/D	D/E	E		
47		C/D	C/D	D/E	E			
68	C	C/D	D/E	D	E			
100	C	D/E	D	E				
150	D	D	D/E	E				
220	D	D/E	E					
330	D/E	E						
470	E							

CONSTRUCTION AND MARKING

C, D, E, Cases

Marking:
 Capacitor marking includes an anode (+) polarity band, capacitance in microfarads and the voltage rating. The Vishay Sprague® trademark is included if space permits. Capacitors rated at 6.3 V are marked 6 V. A manufacturing date code is marked on all capacitors. Capital letter “E” stands for lead (Pb)-free terminations small cap letter “e” stands for SnPb



STANDARD RATINGS						
CAPACITANCE (μF)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μA)	MAX. DF AT + 25 °C 120 Hz (%)	STANDARD (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)
4 V_{DC} AT + 85 °C; 2.7 V_{DC} AT + 125 °C						
68	C	T86C686(1)004(2)(3)(4)(5)	2.7	8	1.40	0.40
100	C	T86C107(1)004(2)(3)(4)(5)	4.0	8	0.80	0.40
150	D	T86D157(1)004(2)(3)(4)(5)	6.0	8	0.60	0.30
220	D	T86D227(1)004(2)(3)(4)(5)	8.8	8	0.60	0.40
330	D	T86D337(1)004(2)(3)(4)(5)	13.2	15	0.60	0.30
330	E	T86E337(1)004(2)(3)(4)(5)	13.2	8	0.50	0.30
470	E	T86E477(1)004(2)(3)(4)(5)	18.8	16	0.50	0.25
6.3 V_{DC} AT + 85 °C; 4 V_{DC} AT + 125 °C						
15	C	T86C156(1)6R3(2)(3)(4)(5)	0.9	6	1.80	0.60
22	C	T86C226(1)6R3(2)(3)(4)(5)	1.1	6	1.80	0.60
33	C	T86C336(1)6R3(2)(3)(4)(5)	1.6	6	1.40	0.60
47	C	T86C476(1)6R3(2)(3)(4)(5)	2.3	6	1.30	0.60
47	D	T86D476(1)6R3(2)(3)(4)(5)	2.3	6	0.90	0.45
68	C	T86C686(1)6R3(2)(3)(4)S	3.3	6	0.80	n/a
68	D	T86D686(1)6R3(2)(3)(4)(5)	3.3	6	0.70	0.35
100	D	T86D107(1)6R3(2)(3)(4)(5)	6.0	8	0.70	0.35
100	E	T86E107(1)6R3(2)(3)(4)(5)	6.0	8	0.70	0.30
150	D	T86D157(1)6R3(2)(3)(4)(5)	9.0	8	0.60	0.30
220	D	T86D227(1)6R3(2)(3)(4)(5)	13.2	8	0.60	0.30
220	E	T86E227(1)6R3(2)(3)(4)(5)	13.2	8	0.50	0.30
330	E	T86E337(1)6R3(2)(3)(4)(5)	19.8	8	0.50	0.30
10 V_{DC} AT + 85 °C; 7 V_{DC} AT + 125 °C						
10	C	T86C106(1)010(2)(3)(4)S	1.0	6	1.80	n/a
15	C	T86C156(1)010(2)(3)(4)(5)	1.5	6	1.80	0.60
22	C	T86C226(1)010(2)(3)(4)(5)	2.2	6	1.40	0.50
33	C	T86C336(1)010(2)(3)(4)(5)	3.3	6	1.30	0.40
33	D	T86D336(1)010(2)(3)(4)(5)	3.3	6	0.90	0.40
47	C	T86C476(1)010(2)(3)(4)S	4.7	6	1.00	n/a
47	D	T86D476(1)010(2)(3)(4)(5)	4.7	6	0.70	0.40
68	D	T86D686(1)010(2)(3)(4)(5)	6.8	6	0.70	0.35
68	E	T86E686(1)010(2)(3)(4)(5)	6.8	6	0.70	0.35
100	D	T86D107(1)010(2)(3)(4)(5)	10.0	8	0.60	0.30
150	D	T86D157(1)010(2)(3)(4)(5)	15.0	8	0.60	0.30
150	E	T86E157(1)010(2)(3)(4)(5)	15.0	8	0.50	0.40
220	E	T86E227(1)010(2)(3)(4)(5)	22.0	8	0.50	0.30
16 V_{DC} AT + 85 °C; 10 V_{DC} AT + 125 °C						
6.8	C	T86C685(1)016(2)(3)(4)(5)	1.1	6	2.00	0.60
10	C	T86C106(1)016(2)(3)(4)(5)	1.6	6	1.80	0.70
15	C	T86C156(1)016(2)(3)(4)S	2.4	6	1.40	n/a

Note

- Part number definitions:
 - Capacitance tolerance codes: K, M
 - Terminations and packaging codes: C, H, E, L
 - Reliability level: A, B, S, Z
 - Surge current: A, B, S
 - ESR: L, S



STANDARD RATINGS						
CAPACITANCE (μ F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μ A)	MAX. DF AT + 25 °C 120 Hz (%)	STANDARD (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)
16 V_{DC} AT + 85 °C; 10 V_{DC} AT + 125 °C						
22	C	T86C226(1)016(2)(3)(4)(5)	3.5	6	1.30	0.70
22	D	T86D226(1)016(2)(3)(4)(5)	3.5	6	0.90	0.45
33	C	T86C336(1)016(2)(3)(4)(5)	5.3	6	1.00	0.50
33	D	T86D336(1)016(2)(3)(4)(5)	5.3	6	0.70	0.35
47	D	T86D476(1)016(2)(3)(4)(5)	7.5	6	0.70	0.35
47	E	T86E476(1)016(2)(3)(4)(5)	7.5	6	0.70	0.35
68	D	T86D686(1)016(2)(3)(4)(5)	10.9	6	0.60	0.30
100	E	T86E107(1)016(2)(3)(4)(5)	16.0	8	0.60	0.30
150	E	T86E157(1)016(2)(3)(4)S	24.0	10	0.40	n/a
20 V_{DC} AT + 85 °C; 13 V_{DC} AT + 125 °C						
4.7	C	T86C475(1)020(2)(3)(4)(5)	0.9	6	2.00	1.00
6.8	C	T86C685(1)020(2)(3)(4)(5)	1.4	6	1.90	0.60
10	C	T86C106(1)020(2)(3)(4)(5)	2.0	6	1.60	0.80
15	C	T86C156(1)020(2)(3)(4)S	3.0	6	1.40	n/a
15	D	T86D156(1)020(2)(3)(4)(5)	3.0	6	0.90	0.45
22	D	T86D226(1)020(2)(3)(4)(5)	4.4	6	0.70	0.35
33	D	T86D336(1)020(2)(3)(4)(5)	6.6	6	0.70	0.40
33	E	T86E336(1)020(2)(3)(4)(5)	6.6	6	0.70	0.40
47	E	T86E476(1)020(2)(3)(4)(5)	9.4	6	0.60	0.30
68	E	T86E686(1)020(2)(3)(4)(5)	13.6	6	0.60	0.30
25 V_{DC} AT + 85 °C; 17 V_{DC} AT + 125 °C						
2.2	C	T86C225(1)025(2)(3)(4)S	0.6	6	2.80	n/a
3.3	C	T86C335(1)025(2)(3)(4)(5)	0.8	6	2.30	2.10
4.7	C	T86C475(1)025(2)(3)(4)(5)	1.2	6	1.90	1.00
6.8	C	T86C685(1)025(2)(3)(4)(5)	1.7	6	1.60	0.60
10	C	T86C106(1)025(2)(3)(4)(5)	2.5	6	1.40	0.60
10	D	T86D106(1)025(2)(3)(4)(5)	2.5	6	1.00	0.50
15	D	T86D156(1)025(2)(3)(4)(5)	3.8	6	0.80	0.40
22	D	T86D226(1)025(2)(3)(4)(5)	5.5	6	0.70	0.35
22	E	T86E226(1)025(2)(3)(4)(5)	5.5	6	0.70	0.35
33	E	T86E336(1)025(2)(3)(4)(5)	8.3	6	0.60	0.30
35 V_{DC} AT + 85 °C; 23 V_{DC} AT + 125 °C						
1.5	C	T86C155(1)035(2)(3)(4)(5)	0.5	6	3.80	2.60
2.2	C	T86C225(1)035(2)(3)(4)S	0.8	6	2.90	n/a
3.3	C	T86C335(1)035(2)(3)(4)S	1.2	6	2.00	n/a
4.7	C	T86C475(1)035(2)(3)(4)S	1.6	6	1.80	n/a
4.7	D	T86D475(1)035(2)(3)(4)(5)	1.6	6	1.20	0.60
6.8	D	T86D685(1)035(2)(3)(4)(5)	2.4	6	1.00	0.50
10	D	T86D106(1)035(2)(3)(4)(5)	3.5	6	0.80	0.50

Note

- Part number definitions:
 - Capacitance tolerance codes: K, M
 - Terminations and packaging codes: C, H, E, L
 - Reliability level: A, B, S, Z
 - Surge current: A, B, S
 - ESR: L, S

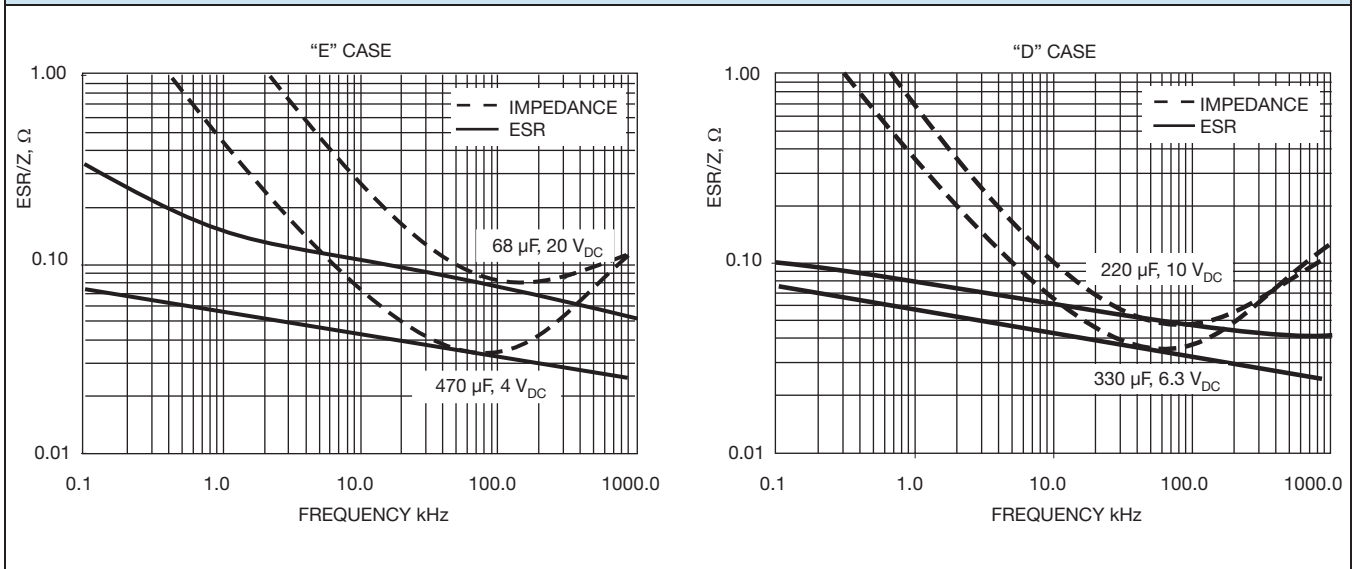


STANDARD RATINGS						
CAPACITANCE (μF)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C (μA)	MAX. DF AT + 25 °C 120 Hz (%)	STANDARD (S) MAX. ESR AT + 25 °C 100 kHz (Ω)	LOW (L) MAX. ESR AT + 25 °C 100 kHz (Ω)
35 V_{DC} AT + 85 °C; 23 V_{DC} AT + 125 °C						
10	E	T86E106(1)035(2)(3)(4)(5)	3.5	6	0.80	0.50
15	D	T86D156(1)035(2)(3)(4)(5)	5.3	6	0.70	0.50
15	E	T86E156(1)035(2)(3)(4)(5)	5.3	6	0.70	0.50
22	E	T86E226(1)035(2)(3)(4)(5)	7.7	6	0.60	0.40
50 V_{DC} AT + 85 °C; 33 V_{DC} AT + 125 °C						
0.47	C	T86C474(1)050(2)(3)(4)S	0.5	4	6.70	n/a
0.68	C	T86C684(1)050(2)(3)(4)S	0.5	4	5.90	n/a
1.0	C	T86C105(1)050(2)(3)(4)(5)	0.5	4	4.40	2.70
1.5	C	T86C155(1)050(2)(3)(4)(5)	0.8	6	5.00	3.20
2.2	C	T86C225(1)050(2)(3)(4)S	1.1	6	2.80	n/a
2.2	D	T86D225(1)050(2)(3)(4)(5)	1.1	6	2.10	0.90
3.3	C	T86C335(1)050(2)(3)(4)(5)	1.7	6	2.40	1.60
3.3	D	T86D335(1)050(2)(3)(4)S	1.7	6	2.00	n/a
4.7	D	T86D475(1)050(2)(3)(4)S	2.4	6	1.10	n/a
6.8	D	T86D685(1)050(2)(3)(4)S	3.4	6	0.90	n/a
6.8	E	T86E685(1)050(2)(3)(4)S	3.4	6	0.90	n/a

Note

- Part number definitions:
 - Capacitance tolerance codes: K, M
 - Terminations and packaging codes: C, H, E, L
 - Reliability level: A, B, S, Z
 - Surge current: A, B, S
 - ESR: L, S

RECOMMENDED VOLTAGE DERATING GUIDELINES (for temperatures below + 85 °C)	
STANDARD CONDITIONS. FOR EXAMPLE: OUTPUT FILTERS	
Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.3	3.6
10	6.0
16	10
20	12
25	15
35	24
50	28
SEVERE CONDITIONS. FOR EXAMPLE: INPUT FILTERS	
Capacitor Voltage Rating	Operating Voltage
4.0	2.5
6.3	3.3
10	5.0
16	8.0
20	10
25	12
35	15
50	24

TYPICAL CURVES AT + 25 °C, IMPEDANCE AND ESR VS. FREQUENCY

POWER DISSIPATION

CASE CODE	MAXIMUM PERMISSIBLE POWER DISSIPATION AT + 25 °C (W) IN FREE AIR
C	0.110
D	0.150
E	0.165

STANDARD PACKAGING QUANTITY

CASE CODE	UNITS PER REEL	
	7" REEL	½ 7" REEL
C	500	250
D	500	250
E	400	200

PRODUCT INFORMATION

Molded Guide	
<ul style="list-style-type: none"> • Pad Dimensions • Package Dimensions 	www.vishay.com/doc?40074
Moisture Sensitivity	www.vishay.com/doc?40135
SELECTOR GUIDES	
Solid Tantalum Selector Guide	www.vishay.com/doc?49053
Solid Tantalum Chip Capacitors	www.vishay.com/doc?40091
FAQ	
Frequently Asked Questions	www.vishay.com/doc?40110