

**Ratings**

Voltage: 600 V  
 Temperature: -40~105 °C  
 Flammability: VW-1

**Conductor**

Conductor count: 1  
 Gauge: 26 AWG 0.13 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size: Ø 0.08 mm x 26  
 Resistance at 20 °C: 150 Ω /km max


**Insulator**

Material: Polyphenylene Ether, Modified (mPPE)  
 Color: purple  
 Diameter: Ø 1 ±0.10 mm  
 Nominal thickness: 0.25 mm  
 Resistance at 20 °C: 100 MΩ /km min

**Wire marking:** E339579 UL AWM STYLE 11028 26 AWG 105°C  
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

**Bend radius**

Minimum: 4 times diameter (4.0 mm)

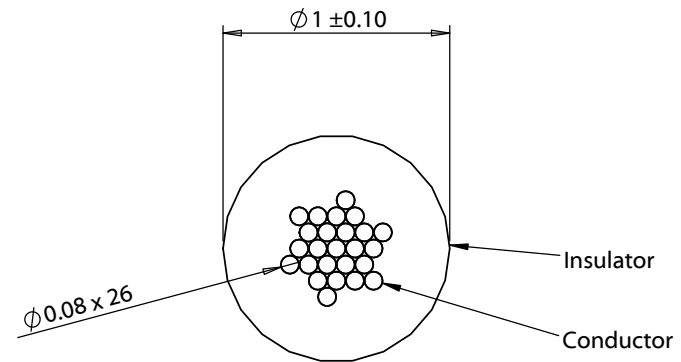

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118          fax 1.541.323.4202 web tensility.com</p>					
A	3/2/2021	Initial release	AG <small>Digitally signed by AG Date: 2021.03.02 14:36:34 -08'00'</small>	RoHS compliant						
			Verified: AW <small>Digitally signed by AW Date: 2021.03.05 12:03:06 -08'00'</small>	Phthalate and halogen free	<table border="1"> <tr> <td>Size:</td> <td>Part number:</td> </tr> <tr> <td>A</td> <td>30-01779</td> </tr> </table>	Size:	Part number:	A	30-01779	
Size:	Part number:									
A	30-01779									
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, hook-up, TS, 26 AWG, UL 11028, 600V, 105C, 1 mm, mPPE, purple	<table border="1"> <tr> <td>Scale:</td> <td>30:1</td> <td></td> <td></td> <td>Sheet 1 of 1</td> </tr> </table>	Scale:	30:1			Sheet 1 of 1
Scale:	30:1			Sheet 1 of 1						

5

4

3

2

1