


PC card drilling dimensions(after plating)  
(thickness 1.60±0.20mm)

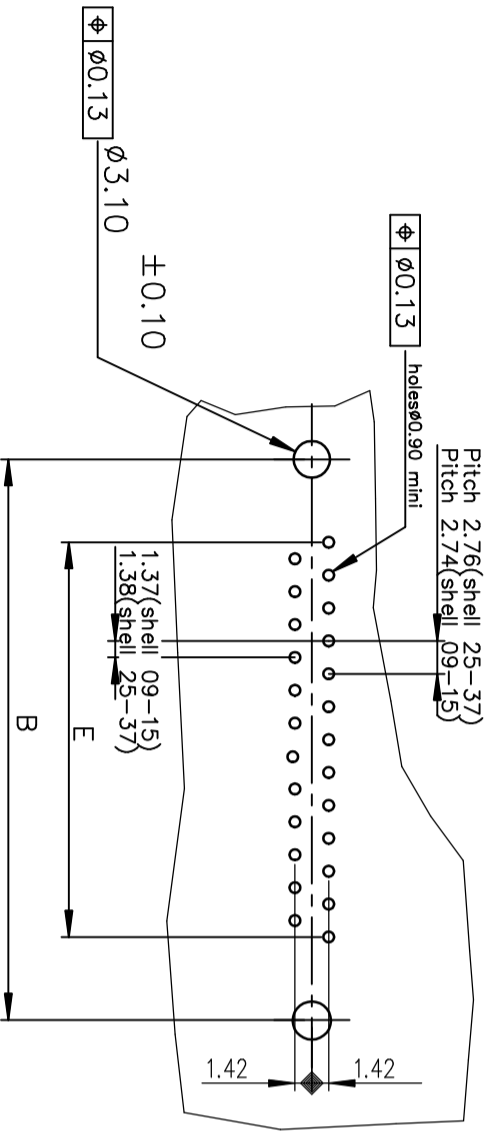

LEAD FREE PART NUMBERS

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	Flgsh	Au	0.76μ Au
09	30.81	24.99	16.96	16.79	10.96	D09P34A4G*00LF	D09P34A6G*00LF	
15	39.14	33.32	25.18	25.12	19.18	D15P34A4G*00LF	D15P34A6G*00LF	
25	53.03	47.04	39.12	38.84	33.12	D25P34A4G*00LF	D25P34A6G*00LF	
37	69.32	63.50	55.68	55.30	49.68	D37P34A4G*00LF	D37P34A6G*00LF	

L --- > φT=M3  
X --- > φT=UNC 4-40

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0000

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302		ISO 406 ISO 1101		MM		D-SUB	
ltr	ecn no	dr	date	tolerances unless otherwise specified	angles	linear	scale	title	
E	EXL-21654	AB	2015-10-26		0±0.1	.00±0.1	2:1	MALE DD WT FOOTPRINT 6.9	
F	EXL-43906	ACJ	2022-01-11		0±2°	.000±0.1		STRAIGHT SOLDER TYPE	
sheet		revision		engr		chr		Amphenol FCI	
Index		sheet		ARUN JOHN		GREGAR MATHEW		type	
1		1		2022-01-11		2022-01-11		Product Customer Drawing	
4		5		2022-01-11		2022-01-11		size	
6		6		appd SAMOJ P KURIAKOSF		2022-01-11		A3	
6		6		2022-01-11		2022-01-11		sheet 1 of 1	
6		6		2022-01-11		2022-01-11		C01-8646-0715	
6		6		2022-01-11		2022-01-11		A3	