

| REVISIONS |     |                        |         |       |      |  |  |
|-----------|-----|------------------------|---------|-------|------|--|--|
| REV       | ECO | DESCRIPTION            | DATE    | BY    | APPR |  |  |
| A3        |     | RELEASE NEW DWG FORMAT | 04JAN14 | JARRY |      |  |  |


PLUG, 6 POSITION, COUPLING RING, AHD SERIES

AHD16-6-12S-B010

REV: A3 SH:

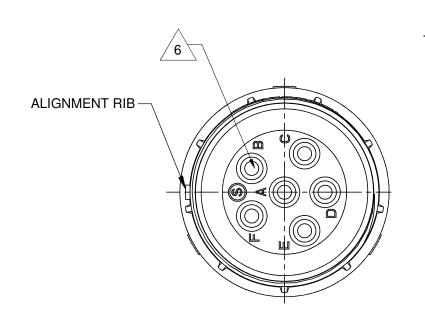

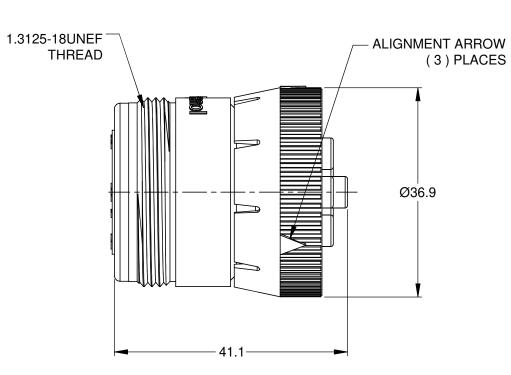

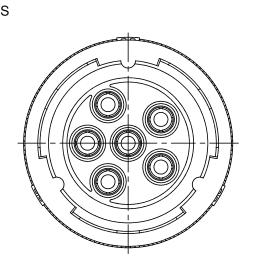

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:


HOUSING: THERMOPLASTIC; GREY

SEAL: SILICONE RUBBER

2. MODIFICATIONS: COUPLING RING

- 3. SPECIFICATIONS:
  - 3.1 CURRENT RATING: 25 AMPS
  - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C.
  - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 3.4 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
  - 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION).
  - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
  - 3.7 RoHS COMPLIANT
- 4. MATING PART: AHD10-6-12P\*
  (\* = AVAILABLE MODIFICATIONS)
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6 CONTACT SIZE AND WIRE RANGE:

| CONTACT   | MIN. INSUL           | MAX. INSUL           | TYPICAL     |
|-----------|----------------------|----------------------|-------------|
| SIZE O.D. |                      | O.D.                 | WIRE RANGE  |
| 12        | 3.40 mm<br>(.134 in) | 4.30 mm<br>(.170 in) | 10 - 14 AWG |

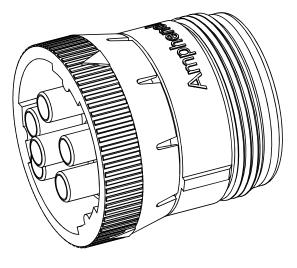

3D VIEW

|                                  | AHD16-6-12S-B010   |  |   |  |   |      |                |               |       |          |    |          |
|----------------------------------|--|--|---|--|---|------|----------------|---------------|-------|----------|----|----------|
|                                  | PART NUMBER  |  | ER DESCRIPTION                              |  |   | ľ    | ITEM           |               |       |          |    |          |
| QUANTITY MATERI                  |  |  |   |  |   | S LI | ST             |               |       |          | -  |          |
|                                  | UNLESS OTHERWISE SPECIFIED  1) All dimensions are in metric(mm). |  | ≣s [  | DATE                                   |   | Λ    | mn             | ho            | \n    | $\frown$ |    |          |
| 2) Tolerances are a              |  | DRAWN: JARRY CHECKED:  | 04  | 4JAN14                                 | Amphenol                                      |      |                |               | I     |          |    |          |
| 2 PL DEC ±0.15<br>3 PL DEC ±0.08 | 2 PL DEC ±0.15 Angles ±1°  |  |   |  | Sine Systems - www.amphenol-sine.com          |      |                |               |       | _        |    |          |
| 3) Note reference                | = <u>x</u>   | ENGINEER:  |   |  | 44724 Morley Drive Clinton Township, MI 48036 |      |                |               |       |          |    |          |
| MATERIAL SPECIFICA               | TIONS:   | APPROVAL:  |   |  |   |      | Clinton Townsh | iip, ivii 460 | J36   |          |    |          |
|                                  |  | CUSTOMER:  | •   |  |   |      | PLUG, 6        |               |       |          |    |          |
|                                  |  | THIS DRAWING IS SUPPLI   |   | TURES                                  |   | COL  | JPLING RIN     | IG, AH        | D SE  | RIES     |    |          |
| PROCESS SPECIFICATIONS:          |  | SPECIFICATIONS AND PE<br>SHOWN HEREON ARE TH<br>THE AMPHENOL CORPOR<br>OF REPRODUCTION ARE<br>DIMENSIONS ARE SUBJECT | RFORMAN<br>E PROPEI<br>ATION. N<br>IMPLIED. | NCE DATA<br>RTY OF<br>IO RIGHTS<br>ALL | B   | C-   | AHD16          | 6-6-12        | S-B0  | 10       | A  | 13 NOISI |
| NEXT ASS'Y:                      | NEXT ASS'Y:  |  | TIONS.                                      |  | SCALE: N                                      | ONE  |                |               | SHEET | 1        | OF | 1        |

## **ATP Series™** - Contact Size 12 Options

| Machined Contacts, Sockets & Pins                        |  |      |       |          |  |  |
|--|--|------|-------|----------|--|--|
| Part Number  | Description  | Size | AWG   | Type     |  |  |
| AT60-204-12141-10  | Male Contact - Pin, Nickel-plated                  | 12   | 10-12 | Machined |  |  |
| AT62-203-12141-10 Female Contact - Socket, Nickel-plated |  | 12   | 10-12 | Machined |  |  |
| AT60-220-1231  | AT60-220-1231 Male Contact - Pin, Gold-plated      |      | 12-14 | Machined |  |  |
| AT62-210-1231  | AT62-210-1231 Female Contact - Socket, Gold-plated |      | 12-14 | Machined |  |  |
| AT60-204-12141   | AT60-204-12141 Male Contact - Pin, Nickel-plated   |      | 12-14 | Machined |  |  |
| AT62-203-12141   | Female Contact - Socket, Nickel-plated             | 12   | 12-14 | Machined |  |  |

| • Smaller AWG for  | DiagnosticGrade™ Machined Contacts, Sockets & Pins • Smaller AWG for Diagnostic Applications • Gold-plated • Increased Mating Cycles • Cost-effective |      |     |          |  |  |  |
|--|---|------|-----|----------|--|--|--|
| Part Number  | Description   | Size | AWG | Type     |  |  |  |
| 65-54749 Male Contact - DiagnosticGrade™, Pin, Gold-plated |   | 12   | 20  | Machined |  |  |  |
| AT62-210-1231-1820   | Female Contact - DiagnosticGrade™, Socket,<br>Gold-plated   | 12   | 20  | Machined |  |  |  |

|      | Tooling - Machined Contacts |  |  |  |  |  |
|------|-----------------------------|--|--|--|--|--|
| Part | Part Number                 | Description  |  |  |  |  |
|      | CA-5D12                     | Universal Hand Crimp Tool, Size 12/16/20<br>(Machined contacts only) |  |  |  |  |
| 33   | CA-5E12                     | Pneumatic Crimp Tool, Size 12/16/20<br>(Machined contacts only)      |  |  |  |  |

|      | Contact Removal Tools |   |  |  |  |
|------|-----------------------|---|--|--|--|
| Part | Part Number           | Description   |  |  |  |
|      | ATRT-100              | Used for removal of contacts for A Series™ products |  |  |  |
|      | AT11-337-1205         | Contact Removal Tool, Plastic, Size 12              |  |  |  |
| 4    | A114017               | Sealing Plug, Size 12, White                        |  |  |  |

| Stamped & Formed Contacts, Sockets & Pins |  |      |       |                  |  |  |
|---|--|------|-------|------------------|--|--|
| Part Number                               | Description                            | Size | AWG   | Туре             |  |  |
| AT60-12-0244                              | Male Contact - Pin, Gold-plated        | 12   | 10-12 | Stamped & Formed |  |  |
| AT62-12-0244                              | Female Contact - Socket, Gold-plated   | 12   | 10-12 | Stamped & Formed |  |  |
| AT60-12-0222                              | Male Contact - Pin, Nickel-plated      | 12   | 10-12 | Stamped & Formed |  |  |
| AT62-12-0222                              | Female Contact - Socket, Nickel-plated | 12   | 10-12 | Stamped & Formed |  |  |
| AT60-12-0144                              | Male Contact - Pin, Gold-plated        | 12   | 12-14 | Stamped & Formed |  |  |
| AT62-12-0144                              | Female Contact - Socket, Gold-plated   | 12   | 12-14 | Stamped & Formed |  |  |
| AT60-12-0166                              | Male Contact - Pin, Nickel-plated      | 12   | 12-14 | Stamped & Formed |  |  |
| AT62-12-0166                              | Female Contact - Socket, Nickel-plated | 12   | 12-14 | Stamped & Formed |  |  |

|      | Tooling - Stamped & Formed Contacts |   |  |  |  |  |
|------|-------------------------------------|---|--|--|--|--|
| Part | Part Number                         | Description   |  |  |  |  |
|      | MFX-3973                            | Crimp Die - Size 12 (S&F contacts only)                       |  |  |  |  |
|      | MFX-3985                            | Crimp Die - Size 12 (S&F contacts only) 10-12AWG -02XX Series |  |  |  |  |
| Ł    | ATT-12-00                           | Hand Crimp Tool - Size 12, 12AWG (S&F contacts only)          |  |  |  |  |

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021