


## FEATURES

- T1-T2 function
- Temperature alarm function
- Data Hold function
- Adjustable auto power off time setting
- Fast response with high accuracy
- Measures K, J, E, T, N, R, S type thermocouples
- Min/Max/Avg recording of all channels
- USB interface, PC software included
- Datalogging up to 32,000 points each channel
- Large backlit LCD shows all channels on display
- Recall function to instantly read-out up to 100 sets manually saved data
- Bluetooth capability



**NEW!**

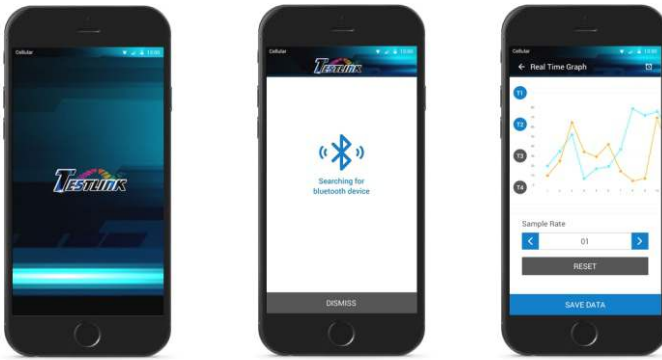

APP available for iOS & Android system



LED Back Light

## SPECIFICATIONS

**Measurement Range:** -200°C~1370°C; -328°F~2498°F

**Accuracy:** ±0.1%rdg+0.7°C; ±0.1%rdg+1.4°F

**Resolution:** 0.1°C; 0.1°F

**Input Protection:** 30Vrms Maximum

**Battery Type:** 1.5V AAA size Battery x 4 pcs

**Operating Condition:** 0°C to 50°C(<90%RH)

**Storage Condition:** -20°C to 60°C(<75%RH)

**Dimensions:** 187 x 75 x 29 (mm)

### Accessories:

User's manual, micro USB cable, battery, Windows software, carrying case, K type bead probe x 2 pcs, BT-01 Bluetooth adapter.



Certificate No. 49Q13377

# CENTER®

## CENTER TECHNOLOGY CORP.

4F, No.415, Jung-Jeng Road, Shu-Lin Dist.,  
New Taipei City 238, Taiwan  
TEL: 886-2-26763926 E-Mail : center@centertek.com  
FAX: 886-2-26763925 http ://www.centertek.com

## BT-01 Bluetooth Adapter



(Dimensions: 36x24x6.5 mm)



\* The specifications and other information in this catalogue are subject to change without prior notice.

Distributed by: