EdgeReady Micro Data Center



Compact Floor-Standing, 21U Usable, 3 kVA, 120V

Benefits

- Provides preconfigured IT infrastructure for edge computing servers, storage and network hardware in space-limited locations
- Integrates secure rack space, reliable power distribution, expandable battery backup, remote management and passive cooling
- Prevents configuration errors, reduces installation time, decreases field costs and standardizes edge computing infrastructure
- Ships three business days from receipt of order, after design, assembly and testing by experts in a controlled environment


Included Hardware

- A SR24UB Compact Rack Enclosure (Standard Width)
- B SMART3000RMXLN SmartPro® UPS System with Pre-Installed WEBCARDLX Network Management Card
- **E2MTHDI** Environmental Sensor (Temperature/Humidity/Digital Inputs)
- **D PDUMH30** Metered PDU

Specifications

Also includes (21) 1U blanking panels with toolless mounting. Assembled/tested unit includes reinforced shock pallet and loading ramps for stable shipment and reshipment with installed IT equipment. Kit version includes major components ready for final assembly on-site.

See Next Page for Customization Options

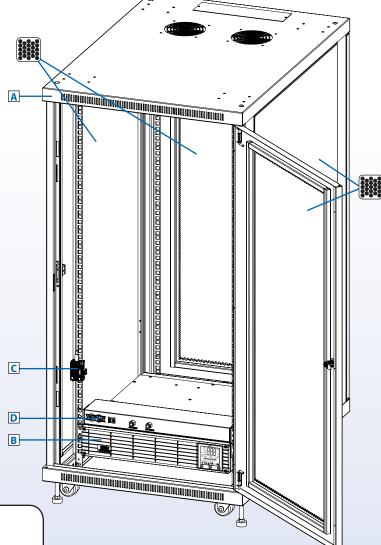

| Model (Kit) | MDK1F21UPX00000 |
|--------------------------------------|--|
| Model (Assembled/Tested) | MDA1F21UPX00000 |
| Output Power Capacity | 3 kVA/2.88 kW/24A Max |
| Rack Space | 24U Total; 21U Usable |
| Weight Capacity | 1000 lb. (453 kg) Total; 791 lb. (359 kg) Usable |
| Maximum Device Depth | 32.5 in. (826 mm) |
| Site Power Requirements | 120V, 30A, 60 Hz |
| Site Outlet Required | NEMA L5-30R |
| UPS Type | Line-Interactive with Sine Wave Output |
| Runtime (50%/100% Load) | 10/3 min. (Expandable) |
| High-Availability Features | Automatic Voltage Regulation (AVR); |
| | Battery Backup; Hot-Swappable Batteries |
| Usable Outlets (UPS + PDU) | (20) NEMA 5-15/20R |
| Dimensions (Assembled) | 45.6 x 23.63 x 33.5 in. (1158 x 600 x 851 mm) |
| Weight (Assembled) | 209 lb. (95 kg) |
| Warranty* | 2-Year Limited Warranty (Extendable) |
| *Any component with a warranty longe | r than 2 years will be covered by the longer warranty. |




Powering and Connecting Your World


Unlimited Micro Data Center Customization

Tripp Lite's solutions team is standing by to help you tailor your EdgeReady micro data center to match the business and technology requirements of your edge deployment strategy. We ship custom solutions in as little as five business days, assembled and tested. We can help you customize your EdgeReady micro data center in several ways:

- · Quick and easy customization via add-on accessories for the stock configurations
- Upgrades to included components of stock configurations with ready-to-ship alternatives
- · Customization of individual components like racks, PDUs and cables (increases lead time)




B020-U16-19-IP 1U Rack Console with 16-Port KVM Switch and Remote Access



SRCOOL7KRM 8U Rack-Mount Air Conditioning Unit (2 kW)



B093-008-2E4U-M 8-Port Console Server with Built-in Modem for Fail-Safe Access



PDUMH30NET 2U Switched PDU with Remote Current Monitoring, Alerts and Outlet Control

| Switched PDU | PDUMH30NET with (16) NEMA 5-15/20R; 2U (Replaces standard PDU.) |
|---|---|
| Battery Packs for Extended Runtime (50%/100% Load) | 30/11 min. with BP48V24-2U (Limit 1); 43/16 min. with BP48V27-2US; 67/26 min. with BP48V60RT-3U |
| Cooling | SRCOOL7KRM (2 kW; 8U Rack-Mount, NEMA 5-15P) or SRCOOL12K (3.5 kW; Portable; NEMA 5-15P) |
| KVM Switch | B022-U16-IP; B020-U16-19-IP (With LCD Console) |
| Console Server | B093-008-2E4U-M |
| Door Monitoring Kit | SRSWITCH (Monitors front/rear doors.) |
| Airflow Management | SR1UBRUSH |
| Cable Managers | 40+ Horizontal, Vertical and External Cable Management Options at tripplite.com |
| Power Cords | Match to IT Equipment; 250+ Power Cord Options at tripplite.com |
| Network Cables | Match to IT Equipment; 1000+ Copper and Fiber Network Cable Options at tripplite.com |
| Patch Panels | 60+ Copper and Fiber Patch Panel Options at tripplite.com |
| Additional Sensors | E2MT (Connect up to 3 sensors total per WEBCARDLX to monitor top/middle/bottom temperature.) |

1111 W. 35th Street, Chicago, IL 60609 USA | 773.869.1236 | tripplite.com

