


COIL: @ 25°C	
RESISTANCE	1350 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 4 MS MAX. BOUNCE 2 MS MAX. CONTACT STABILIZATION 2.5 MS MAX

### CUSTOMER DATA SHEET

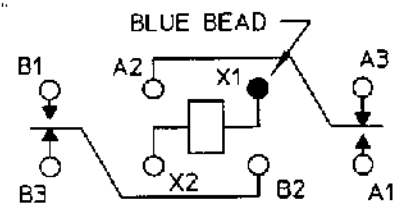

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
50,000 OPERATIONS

DR. PBB 1/18/01

CK: *[Signature]*

**CI Technologies**  
advanced control electronic solutions

3SBC1521A2

CUST. QPL  
CUST. NO. M39016/13-060M REV.

"3SBC" RELAY