

# SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)

Conformity to RoHS Directive

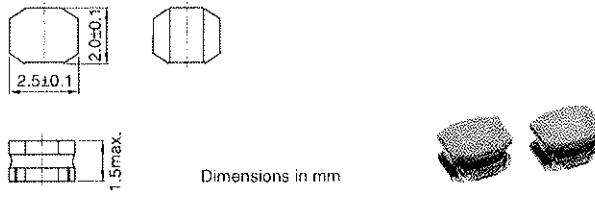
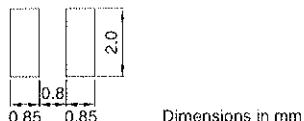
VLS Series VLS252015

**FEATURES**

- Miniature size  
Mount area: 2.5x2mm  
Height: 1.5mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

**APPLICATIONS**

DVCs, DSCs, PDAs, LCD displays, cellular phones, HDDs, etc.

**SHAPES AND DIMENSIONS****RECOMMENDED PC BOARD PATTERN****ELECTRICAL CHARACTERISTICS**

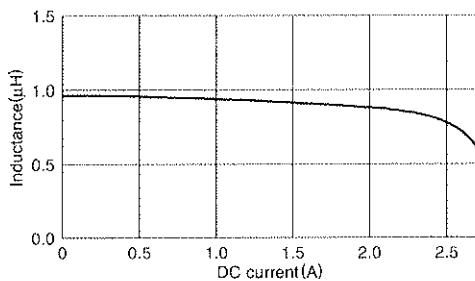
Part No.	Inductance ( $\mu$ H)	Inductance tolerance (%)	Test frequency (MHz)	DC resistance ( $\Omega$ )		Rated current(A)*		Based on temperature rise typ.
				max.	typ.	max.	typ.	
VLS252015T-1R0N1R7	1	$\pm 30$	1	0.082	0.068	2.3	2.62	1.7
VLS252015T-1R5N1R4	1.5	$\pm 30$	1	0.12	0.1	1.9	2.18	1.4
VLS252015T-2R2M1R2	2.2	$\pm 20$	1	0.16	0.133	1.7	1.9	1.2
VLS252015T-3R3M1R0	3.3	$\pm 20$	1	0.218	0.182	1.4	1.57	1
VLS252015T-4R7MR89	4.7	$\pm 20$	1	0.318	0.265	1.2	1.35	0.89
VLS252015T-6R8MR73	6.8	$\pm 20$	1	0.48	0.4	1	1.13	0.73
VLS252015T-100MR66	10	$\pm 20$	1	0.588	0.49	0.82	0.93	0.66

\* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

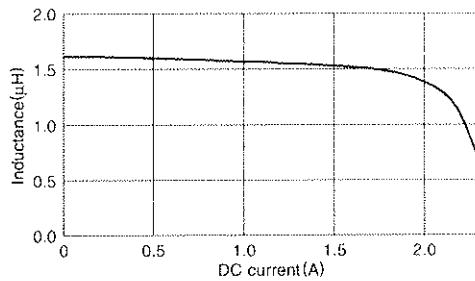
\* Operating temperature range: -40 to +105°C (Including self-temperature rise)

**TYPICAL ELECTRICAL CHARACTERISTICS****INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS**

VLS252015T-1R0N1R7

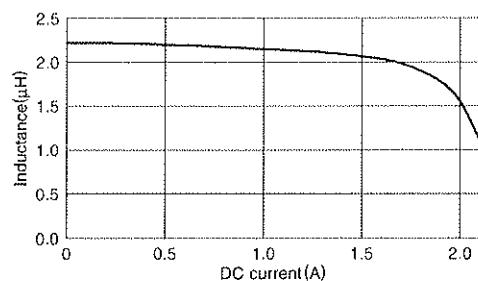
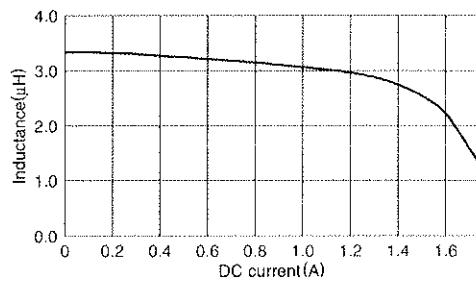
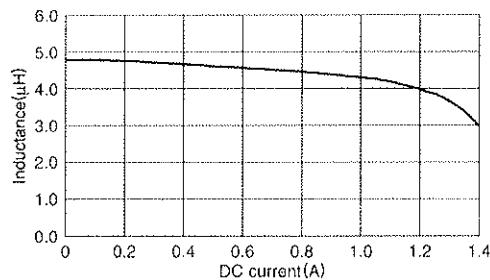
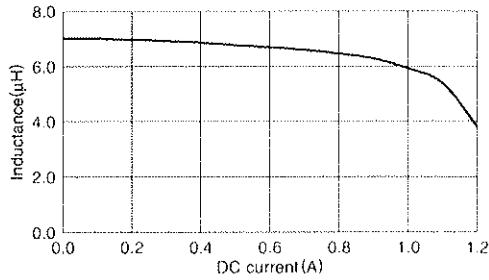
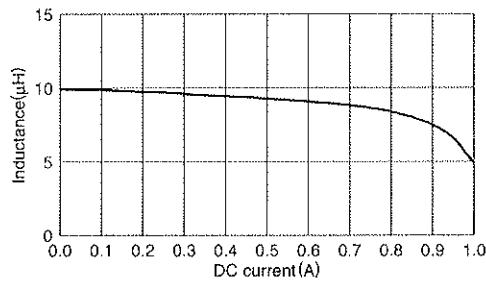



VLS252015T-1R5N1R4



• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

**TYPICAL ELECTRICAL CHARACTERISTICS**
**INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS**
**VLS252015T-2R2M1R2**

**VLS252015T-3R3M1R0**

**VLS252015T-4R7MR89**

**VLS252015T-6R8MR73**

**VLS252015T-100MR66**

**TEST CIRCUIT**


1: LCR meter 4285A f=1MHz  
2: DC constant current