
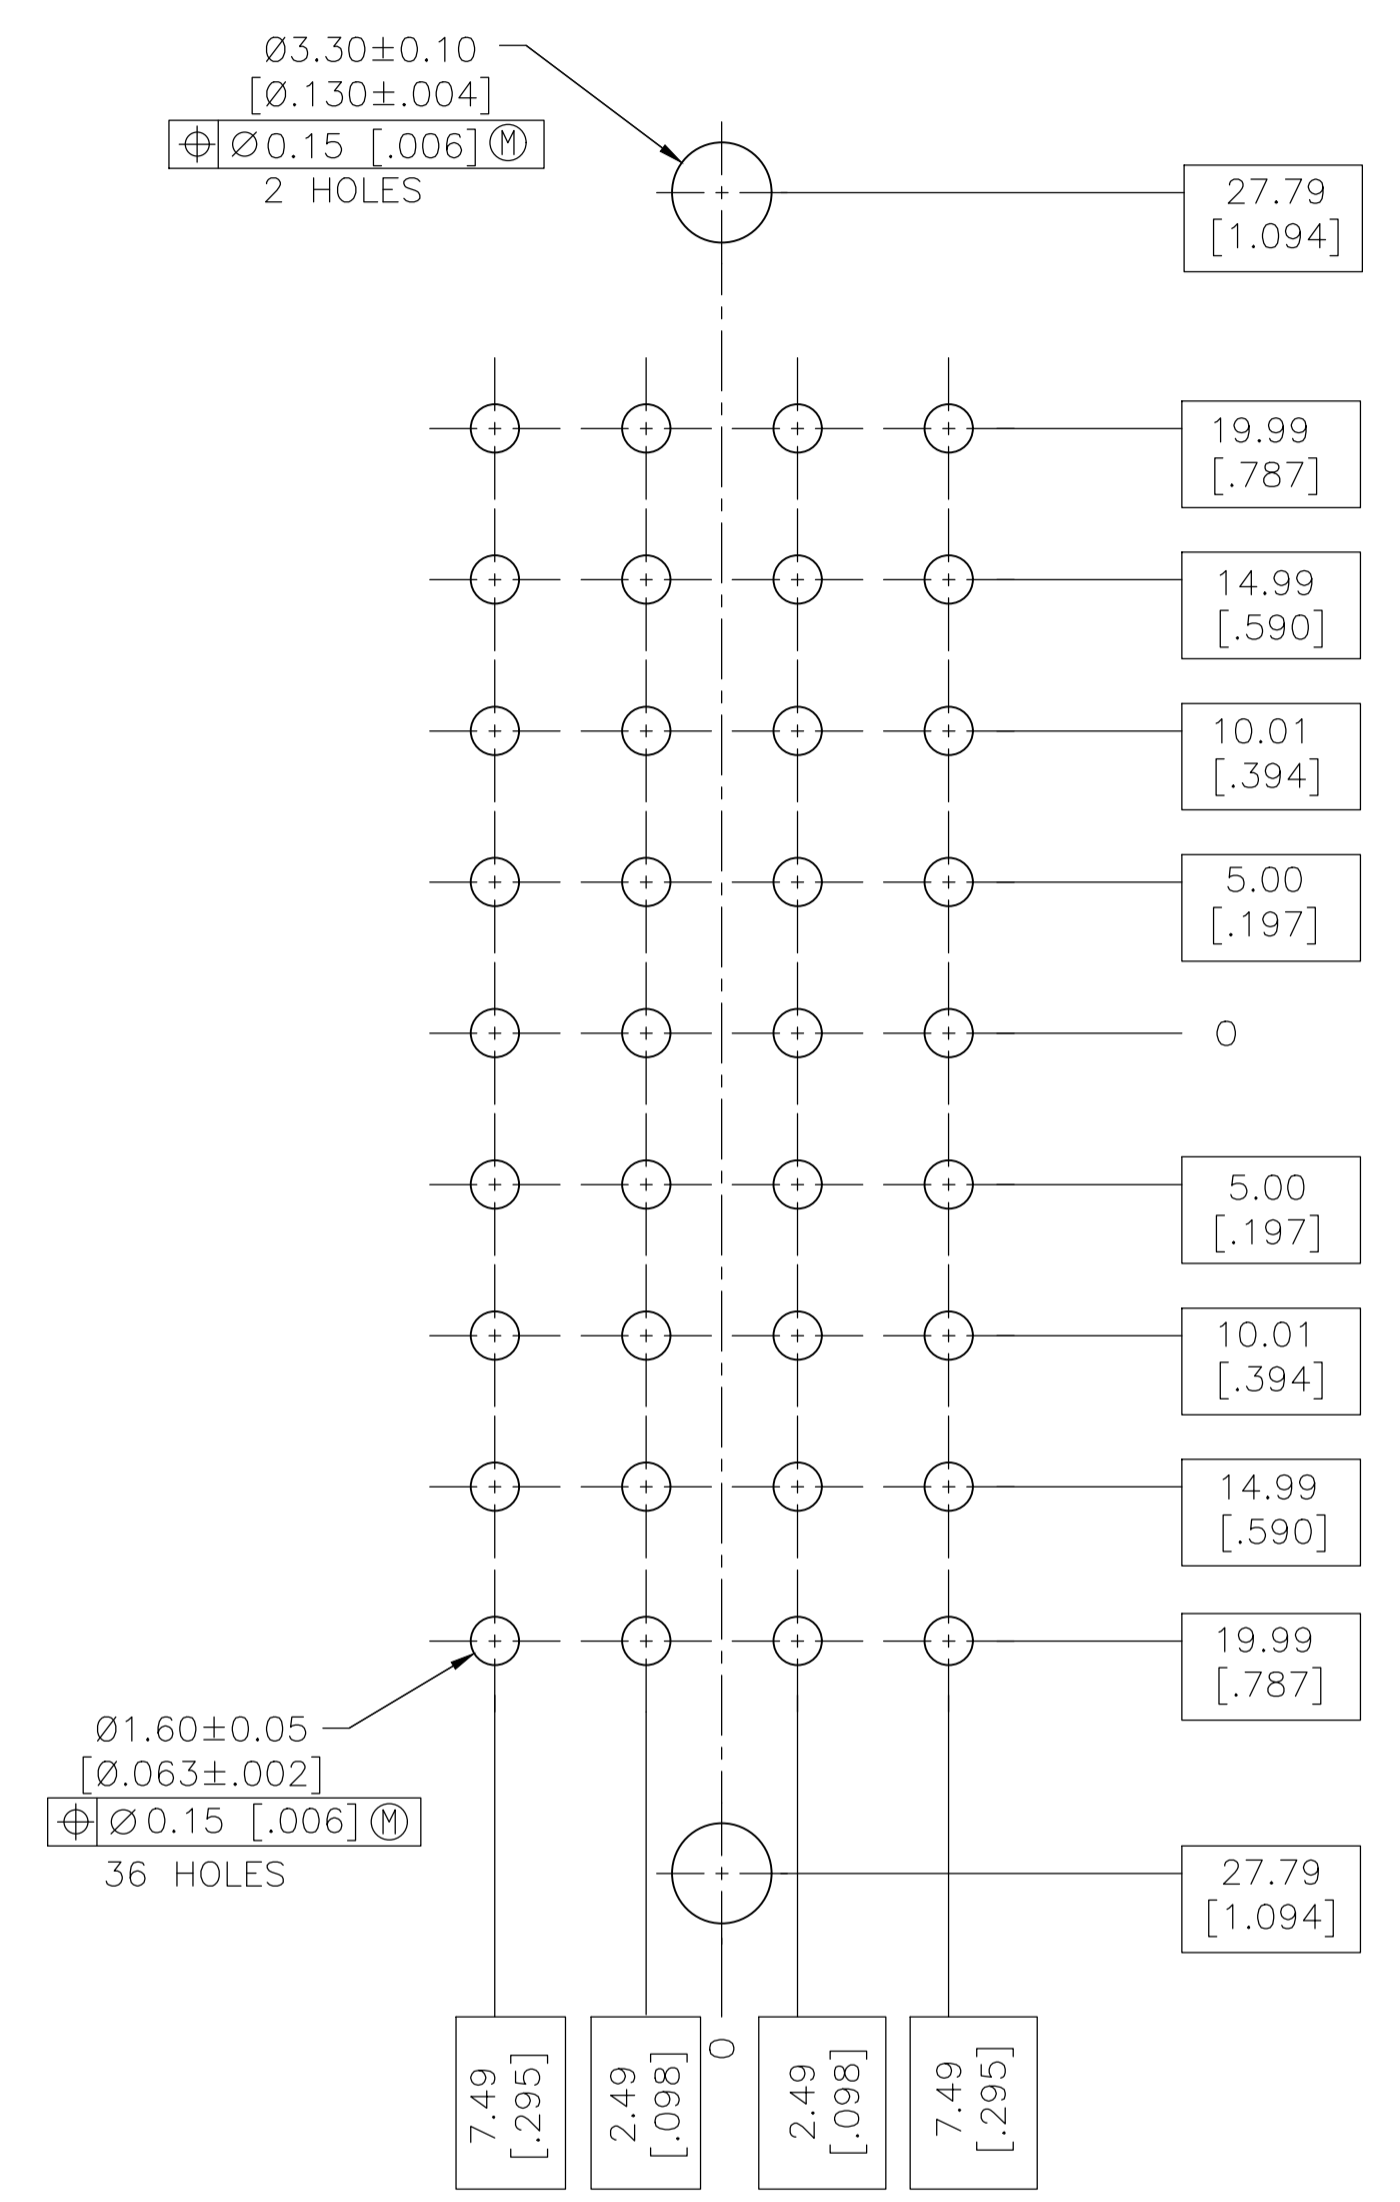
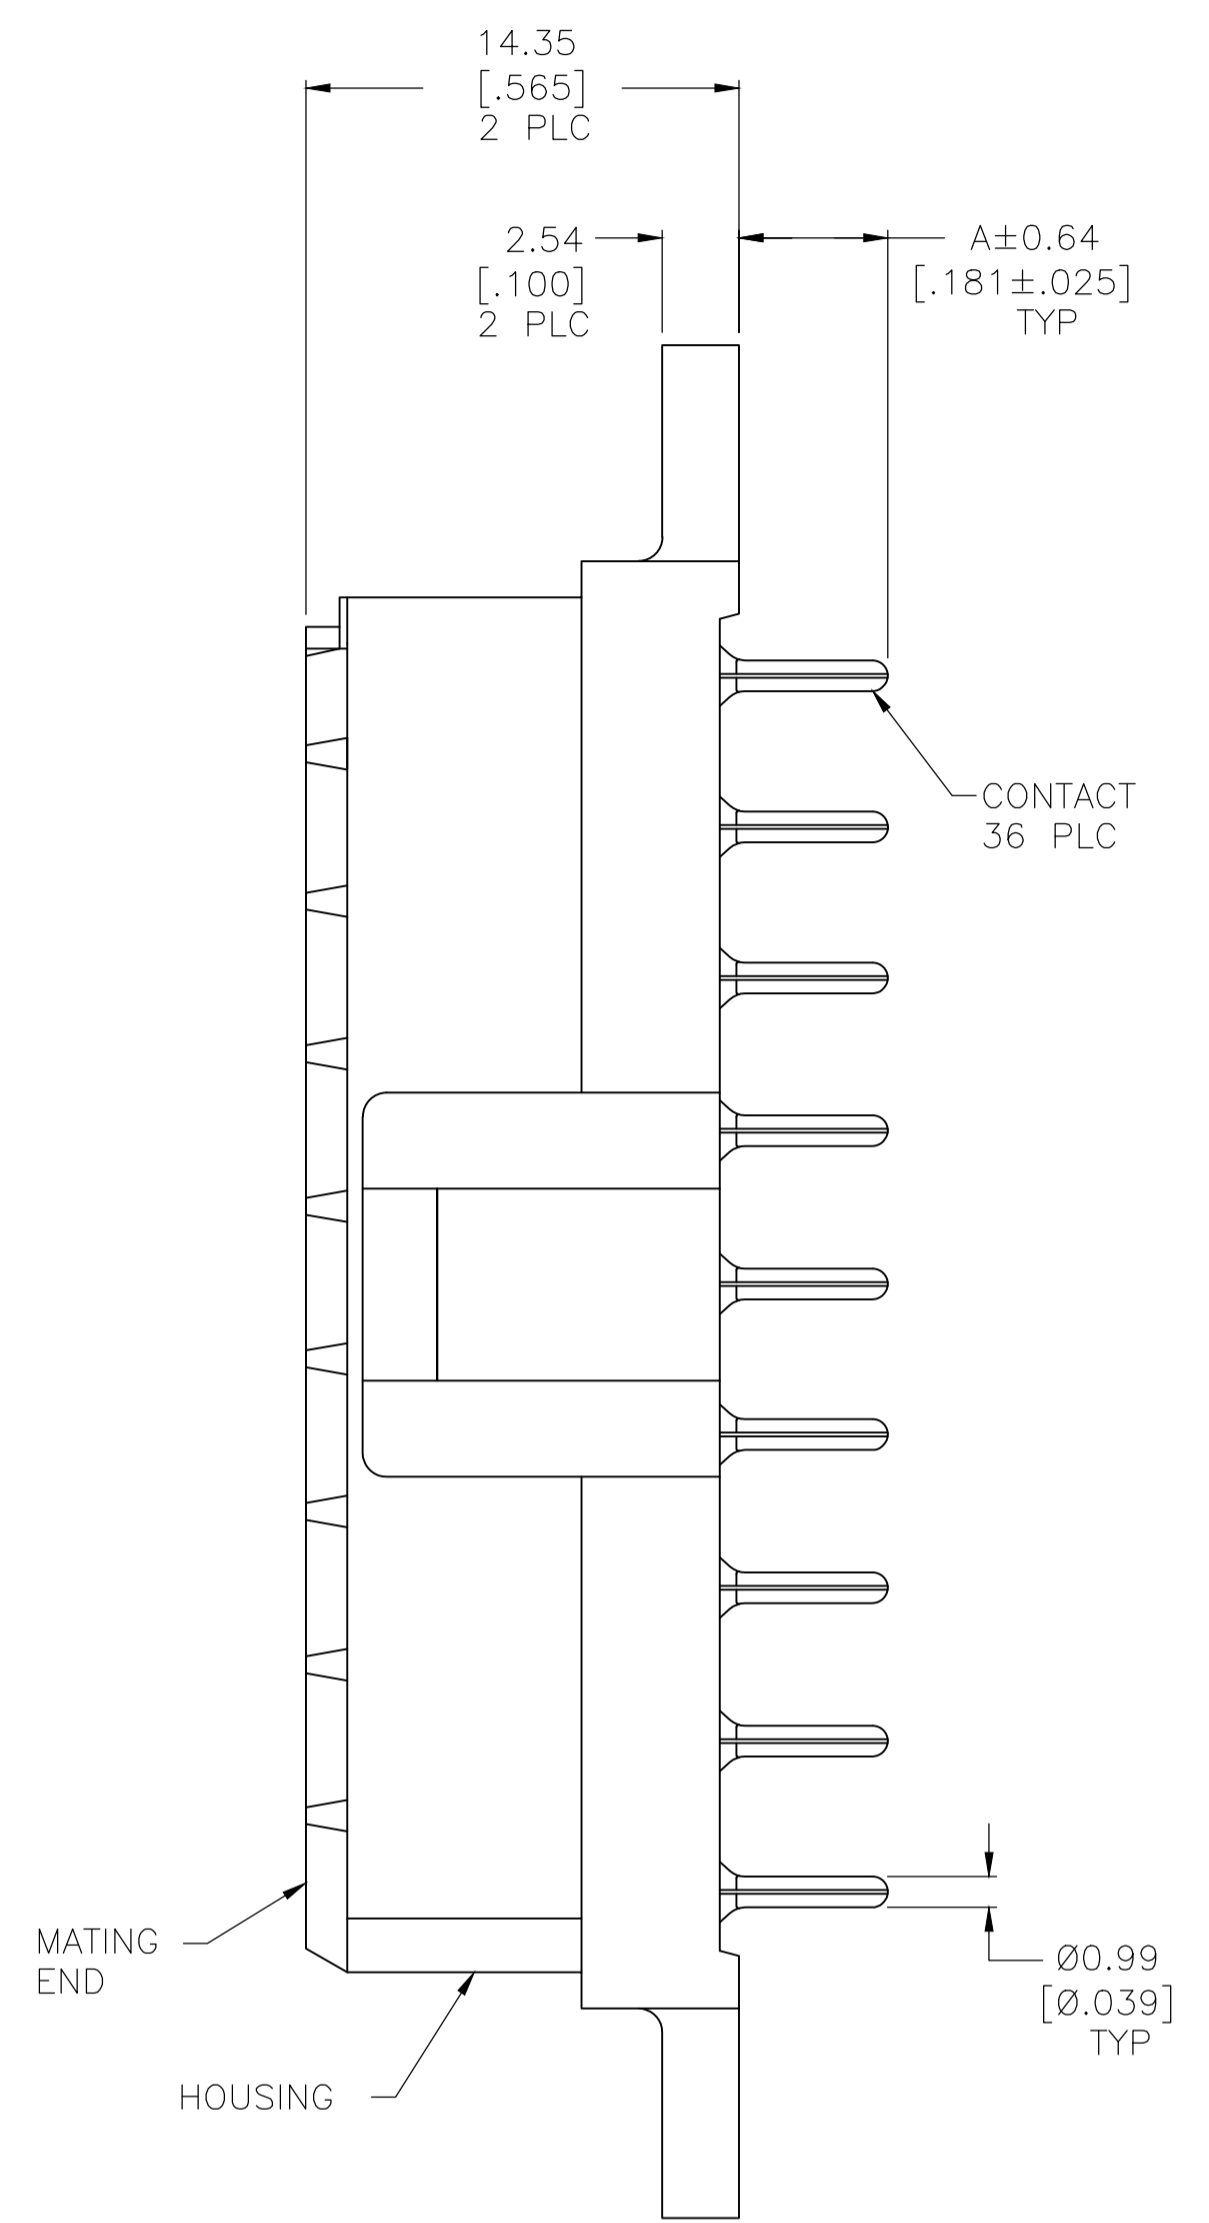


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
P		REVISED PER ECO-17-011181	04AUG2017	RS	MZ
R		REVISED PER ECO-18-000441	24JAN2018	RS	MZ
S		REVISED PER ECO-20-002046	17FEB2020	RK	MZ

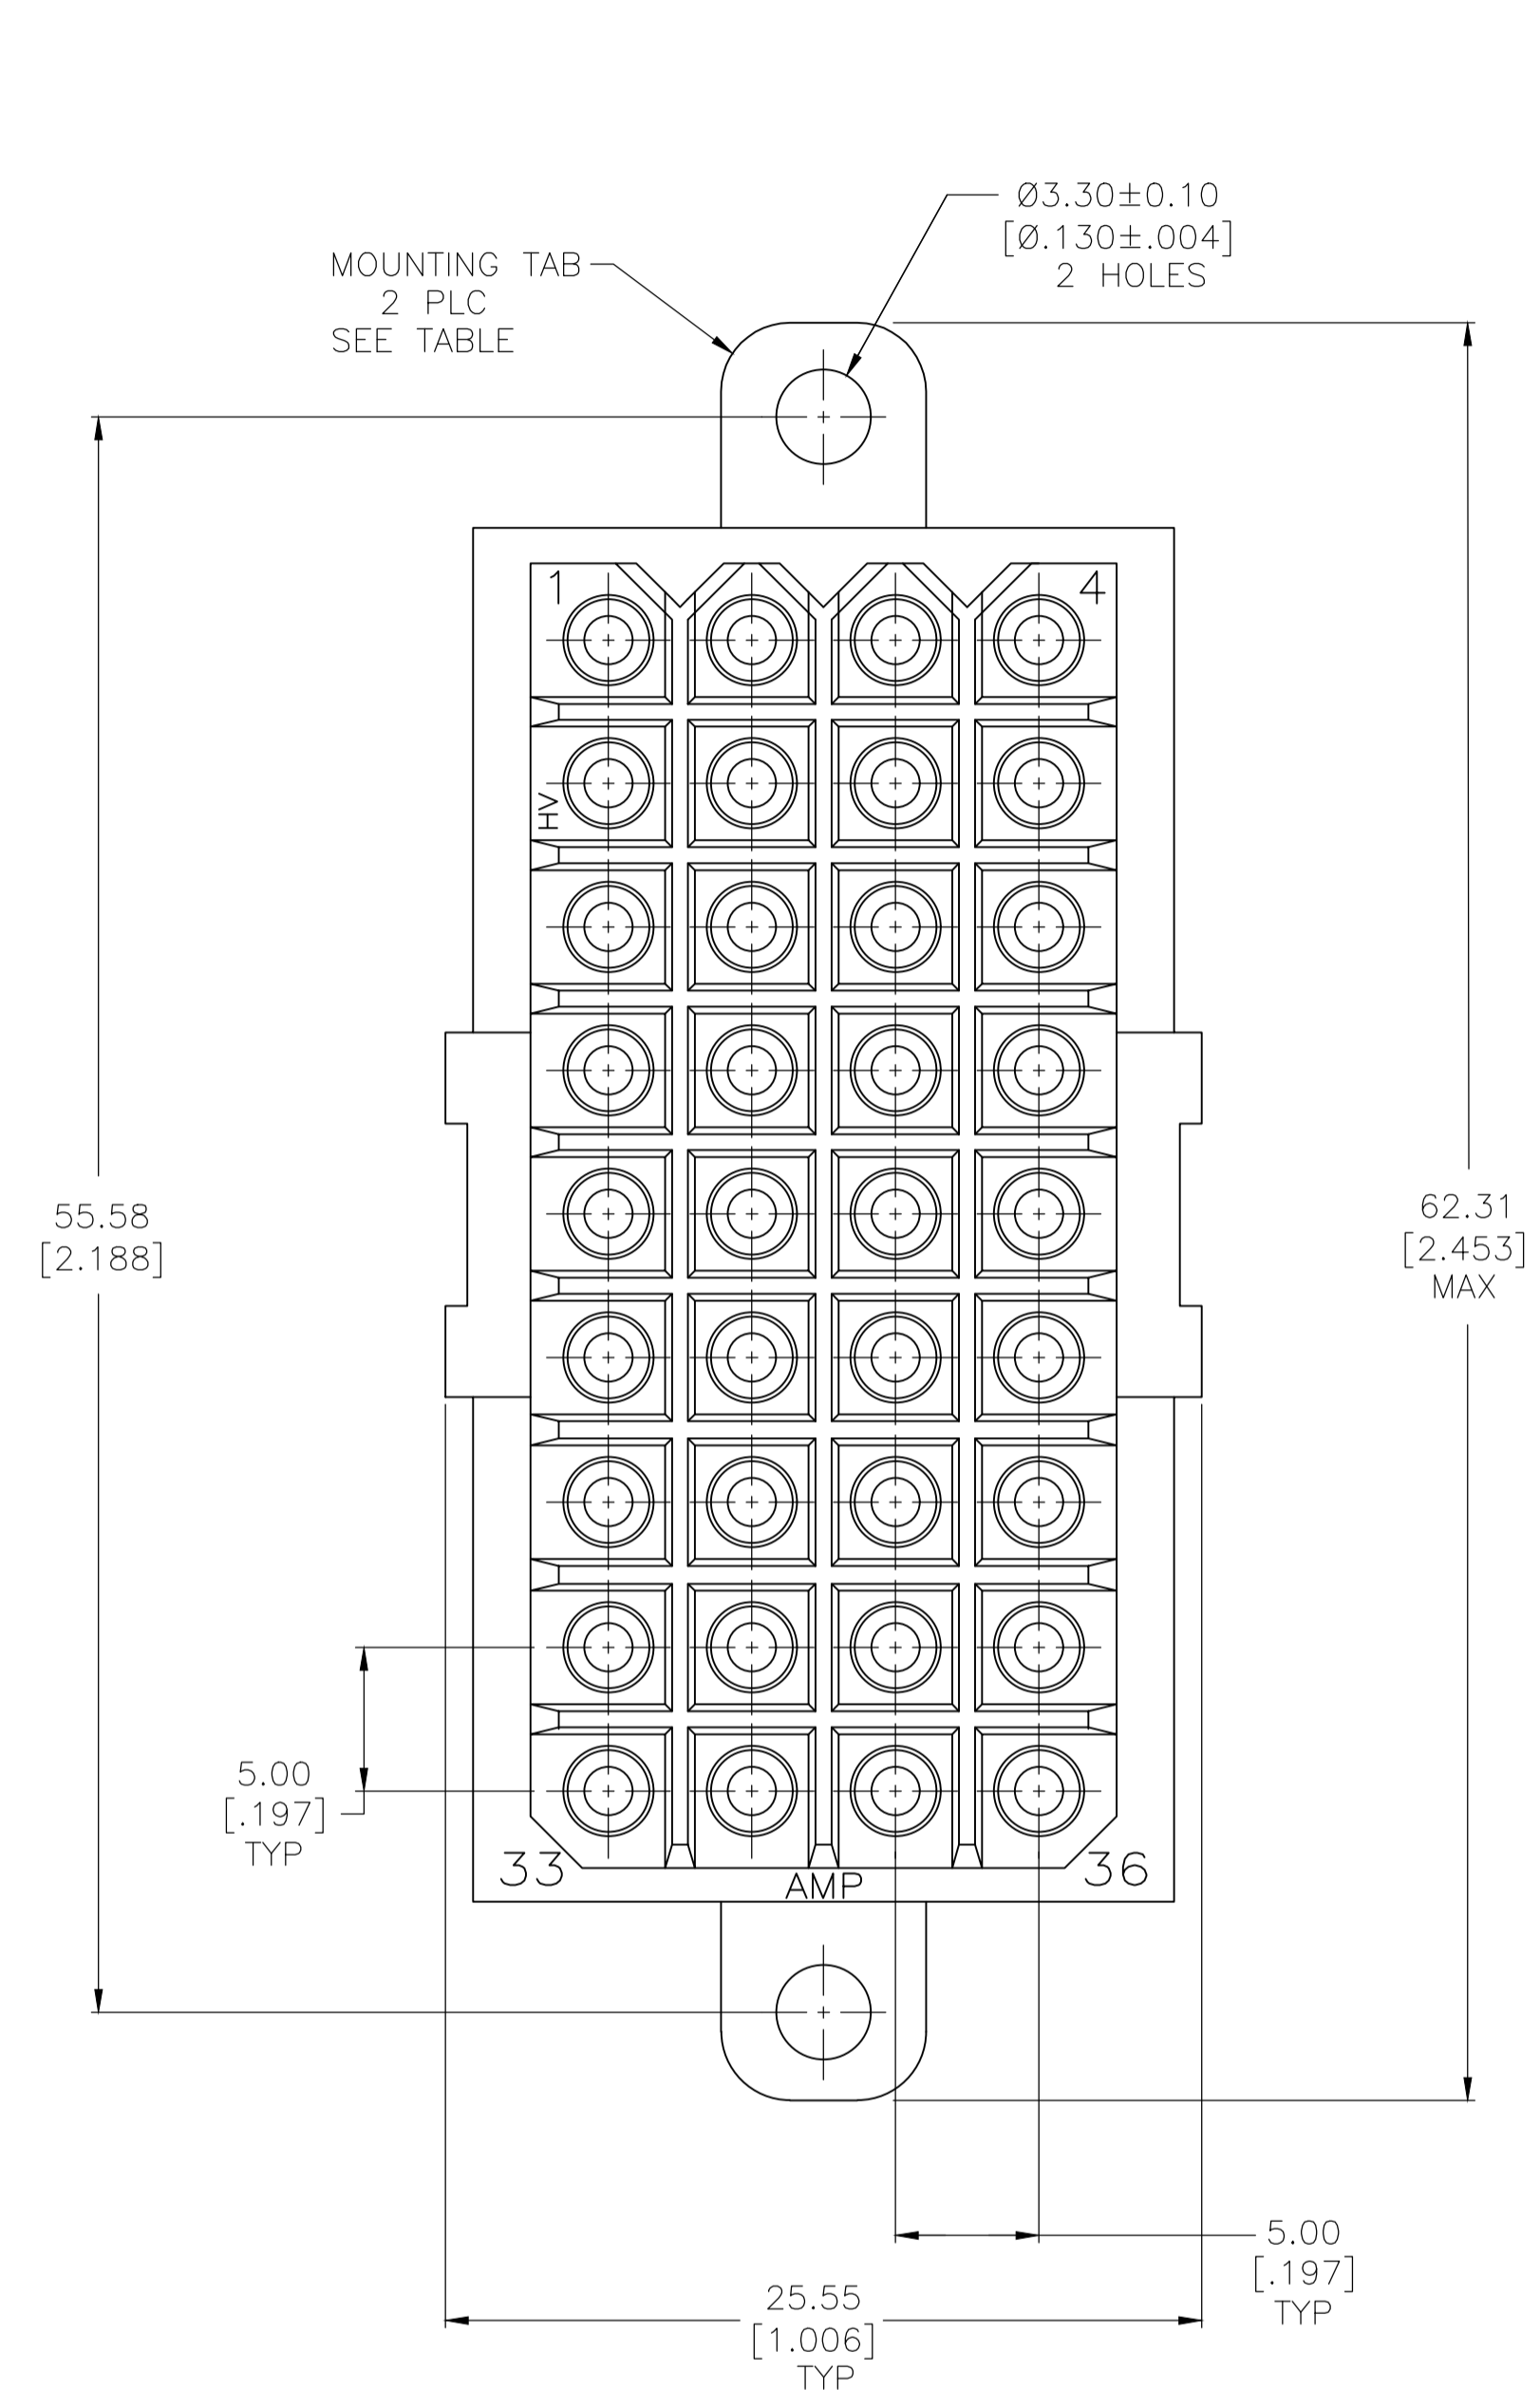

RECOMMENDED LAYOUT

- 1 HOUSING MATERIAL: PA66, BLACK, UL 94 V-0 RATED.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 3.81µm [.000150] MIN TIN-LEAD OVER 1.27µm [.0000050] MIN NICKEL.
- 4 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81µm [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 5 .000150 MIN LEAD FREE TIN OVER .000050 MIN NICKEL.
- 6 0.76µm [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END 3.81µm [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 7 PRILIMINARY PART NUMBER.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

REV	DESCRIPTION	DATE	BY	CHKD	APPROV
6	OBSOLETE	3.50 [.137]			
6	OBSOLETE				
6	OBSOLETE				
5	OBSOLETE	4.60 [.181]			
5	OBSOLETE				
4	OBSOLETE				
4	OBSOLETE				
3	OBSOLETE				
3	OBSOLETE				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN L.SIPE 03/20/92	TE Connectivity	
DIMENSIONS: mm [INCHES]		3-25-92	R.STONE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		3-25-92	A. TRAVIS	
0 PLC ± -	1 PLC ± -	2 PLC ± 0.25 [.010]	NAME	
3 PLC ± -	4 PLC ± -	ANGLES ± -	PRODUCT SPEC	
MATERIAL SEE NOTE		FINISH CONTACT: SEE TABLE	APPLICATION SPEC	
WEIGHT		SIZE	CAGE CODE	DRAWING NO
CUSTOMER DRAWING		A1	00779	207534
SCALE		4:1	SHEET	1 OF 1
REV		S		