# DTP06-4S-E004 ACTIVE

### DEUTSCH | DEUTSCH DT, DEUTSCH DTP

TE Internal #: DTP06-4S-E004 Housing for Female Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTP Housings



Connector System: Wire-to-Wire

Number of Positions: 4

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 6.71 mm [.264 in ]

Sealable: Yes

All DEUTSCH DTP Housings (34)

### Features

### **Product Type Features**

Hybrid Connector

Connector Shape	Rectangular						
Connector System	Wire-to-Wire						
Connector & Housing Type	Housing for Female Terminals						
Sealable	Yes						
Connector & Contact Terminates To	Wire & Cable						
Primary Locking Feature	Integrated in Housing						
Configuration Features							
Blank Cavity Position	0						
Number of Positions	4						
Number of Rows	2						
Electrical Characteristics							
Operating Voltage	200 VAC						
Nominal Voltage Architecture	12 V, 24 V, 48 V						
Body Features							
Cable Exit Angle	180°						

Housing for Female Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



Contact Features	
Contact Size	Size 12
Contact Type	Socket
Mating Pin Diameter	2.39 mm[.094 in]
Contact Current Rating (Max)	25 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Centerline (Pitch)	6.71 mm[.264 in]
Dimensions	
Connector Height	24.38 mm[.96 in]
Product Width	22.05 mm[.868 in]
Product Length	34.65 mm[1.364 in]
Row-to-Row Spacing	10.16 mm[.4 in]
Compatible Insulation Diameter Range	3.4 – 4.32 mm[.134 – .17 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP68
Agency/Standard	SAE J2030
UL Flammability Rating	20mm Flame Test per Standard UL-94

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



Packaging Quantity	800
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

## **Product Compliance**

### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in		

### Halogen Content

### Solder Process Capability

Component Part)

#### Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

Housing for Female Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



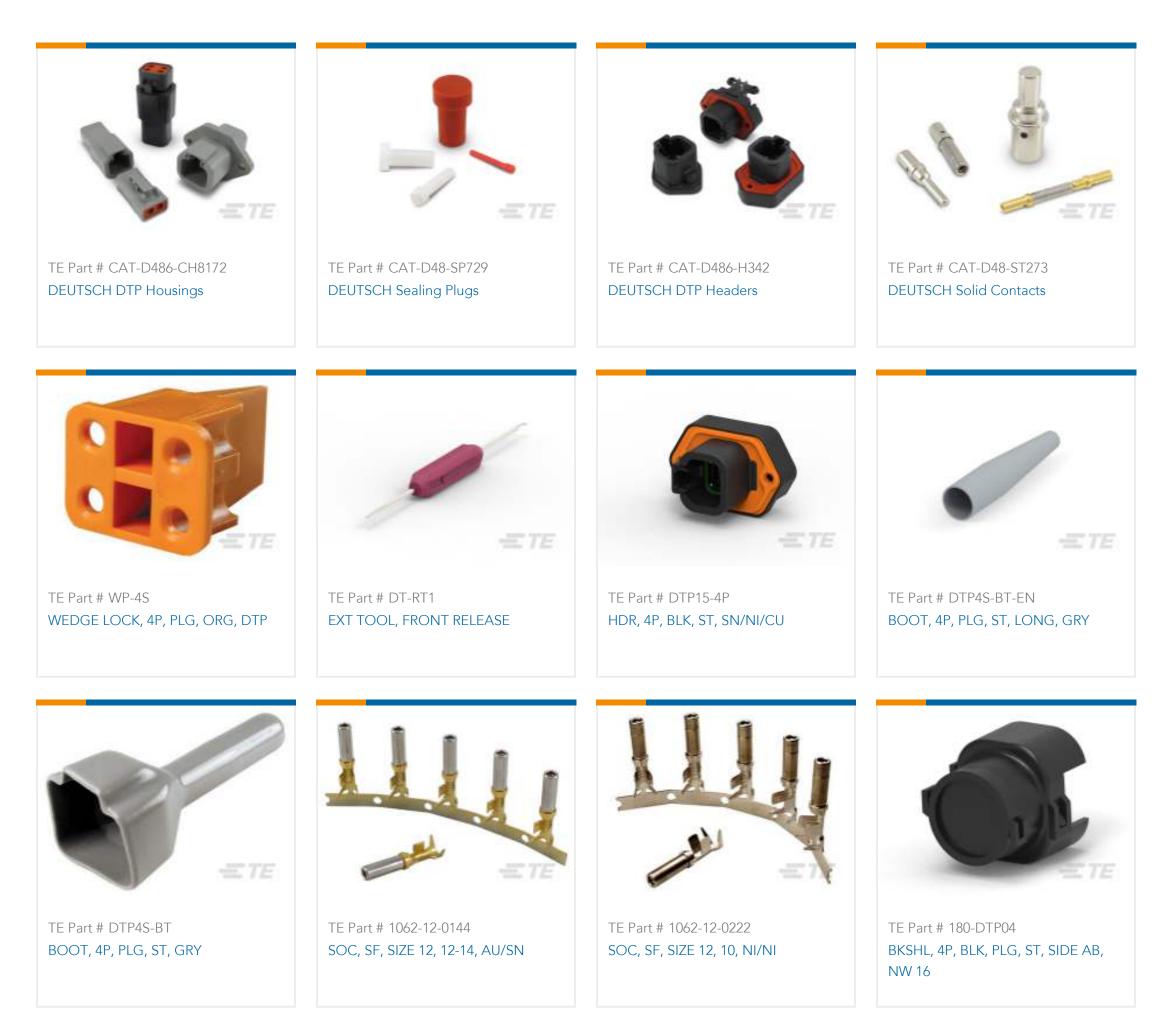



TE Part # B90-DTP04-952B

NW 16

BKSHL, 4P, BLK, PLG, RA-D, SIDE B,

## Also in the Series DEUTSCH DT

TE Part # B90-DTP04

NW 16

BKSHL, 4P, BLK, PLG, RA-U, SIDE B,


TE Part # A90-DTP04-952B

NW 16


BKSHL, 4P, BLK, PLG, RA-D, SIDE A,

Housing for Female Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid




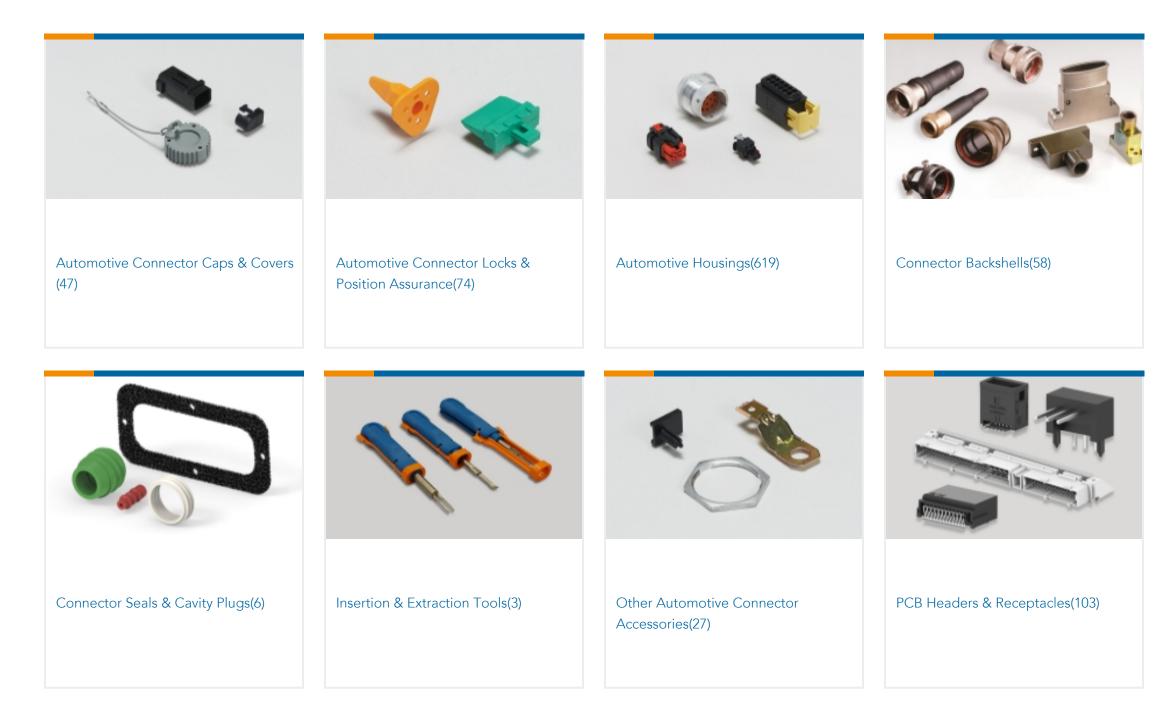

# Also in the Series | DEUTSCH DTP

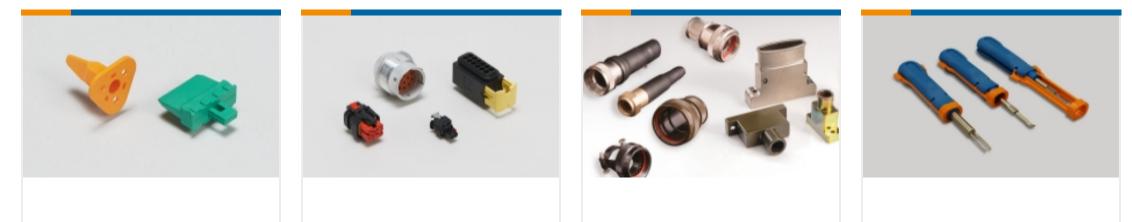

Automotive Connector Locks & Position Assurance(4)	Automotive Housings(34)	Connector Backshells(1)	Insertion & Extraction Tools(3)



PCB Headers & Receptacles(4)

Customers Also Bought

Housing for Female Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid







## Documents

Product Drawings PLG, 4P, BLK, N

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_DTP06-4S-E004\_99\_c-dtp06-4s-e004-99.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_DTP06-4S-E004\_99\_c-dtp06-4s-e004-99.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_DTP06-4S-E004\_99\_c-dtp06-4s-e004-99.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

**Product Specifications** 

**Application Specification** 

English

Housing for Female Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



Agency Approvals UL Report

English