


UNCONTROLLED DOCUMENT

|                  |                                     |         |
|------------------|-------------------------------------|---------|
| PART NUMBER      |                                     | REV.    |
| SSL-LX3059GYW-TR |                                     | A       |
| REV.             | E.C.N. NUMBER AND REVISION COMMENTS | DATE    |
| A                | E.C.N. #11412.                      | 4.30.07 |

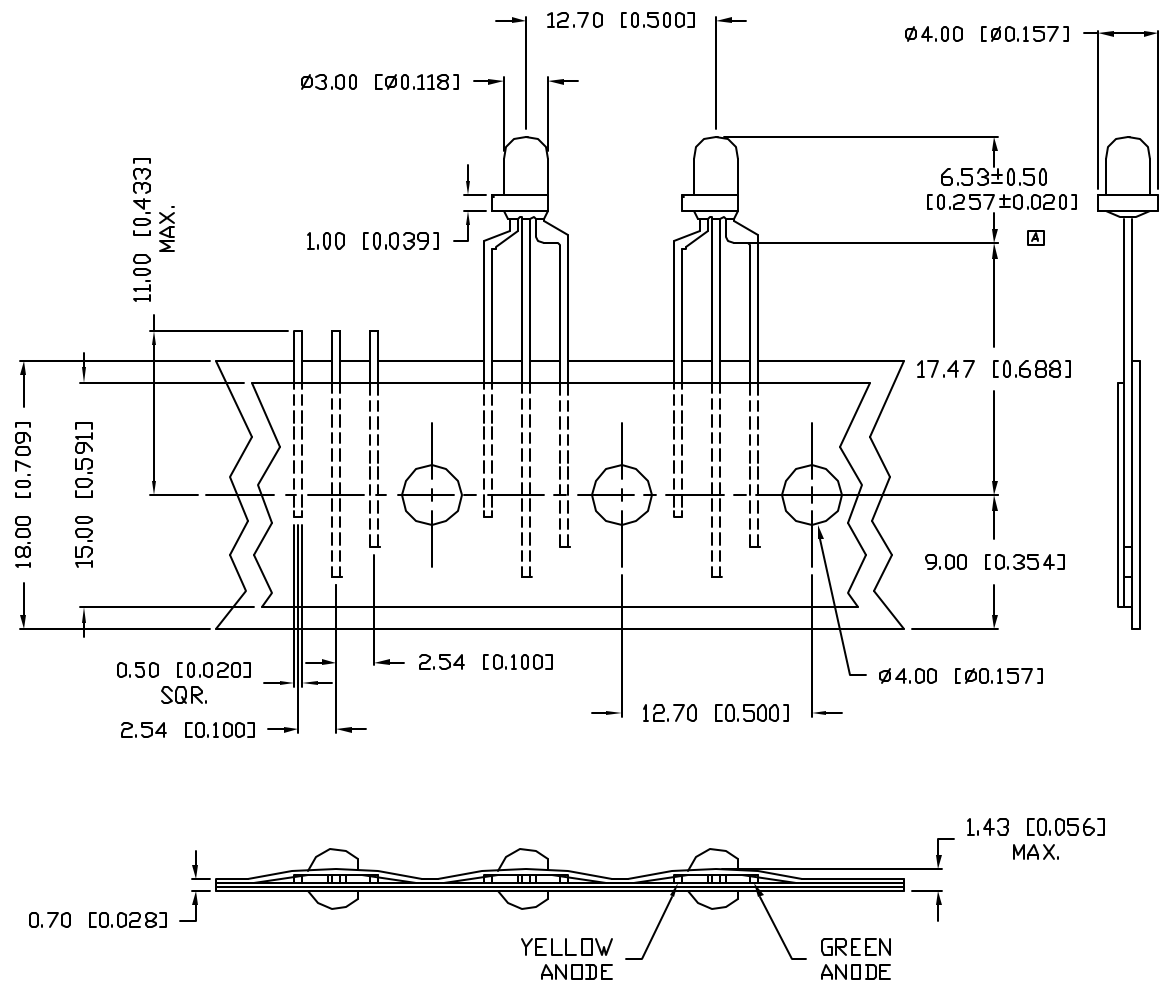

ELECTRO-OPTICAL CHARACTERISTICS  $T_A=25^{\circ}\text{C}$   $I_f=20\text{mA}$

| PARAMETER             | MIN                  | TYP          | MAX     | UNITS    | TEST COND            |
|-----------------------|----------------------|--------------|---------|----------|----------------------|
| PEAK WAVELENGTH       |                      | 585 (GREEN)  |         | nm       |                      |
|                       |                      | 585 (YELLOW) |         | nm       |                      |
| FORWARD VOLTAGE (G/Y) |                      | 2.2/2.1      | 2.6/2.5 | $V_f$    |                      |
| REVERSE VOLTAGE       | 5.0                  |              |         | $V_r$    | $I_f=100\mu\text{A}$ |
| AXIAL INTENSITY       |                      | 6            |         | mcd      | $I_f=20\text{mA}$    |
| VIEWING ANGLE         |                      | 60           |         | 2x theta |                      |
| EMITTED COLOR:        | GREEN/YELLOW         |              |         |          |                      |
| EPOXY LENS FINISH:    | MILKY WHITE DIFFUSED |              |         |          |                      |

LIMITS OF SAFE OPERATION AT  $25^{\circ}\text{C}$

| PARAMETER                        | COLORS | MAX        | UNITS                  |
|----------------------------------|--------|------------|------------------------|
| PEAK FORWARD CURRENT*            |        | 150        | mA                     |
| STEADY CURRENT                   | (G/Y)  | 25/30      | mA                     |
| POWER DISSIPATION                |        | 105        | mW                     |
| DERATE FROM $25^{\circ}\text{C}$ |        | -1.6       | mW/ $^{\circ}\text{C}$ |
| OPERATING, STORAGE TEMP.         |        | -40 TO +85 | $^{\circ}\text{C}$     |
| SOLDERING TEMP.                  |        | +260       | $^{\circ}\text{C}$     |
| 2.0mm FROM BODY                  |        |            | 3 SEC. MAX             |

\*  $t < 10\mu\text{s}$

NOTES:  
1. 2K PER REEL



UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+0.00 DECIMAL PRECISION MAX=-0.00 DECIMAL PRECISION

|  |                                 |   |   |
|--|---------------------------------|---|---|
| REV.<br>A  | PART NUMBER<br>SSL-LX3059GYW-TR | CONFIDENTIAL INFORMATION<br>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. | 290 E. HELEN ROAD<br>PALATINE, IL 60067-6976<br>PHONE: +1.847.359.2790<br>US WEB: www.lumex.com<br>TW WEB: www.lumex.com.tw |
| T-3mm TRI-LEADED LED, BICOLOR GREEN/YELLOW, COMMON CATHODE, MILKY WHITE DIFFUSED LENS, TAPE AND REEL, 2K PER REEL. |                                 | RELIABILITY NOTE<br>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.  | DRAWN BY: JC<br>CHECKED BY:<br>APPROVED BY:<br>DATE: 6.24.02<br>PAGE: 1 OF 1<br>SCALE: N/A                                  |