




UNIT: mm

4 3 2 1

5000±50mm

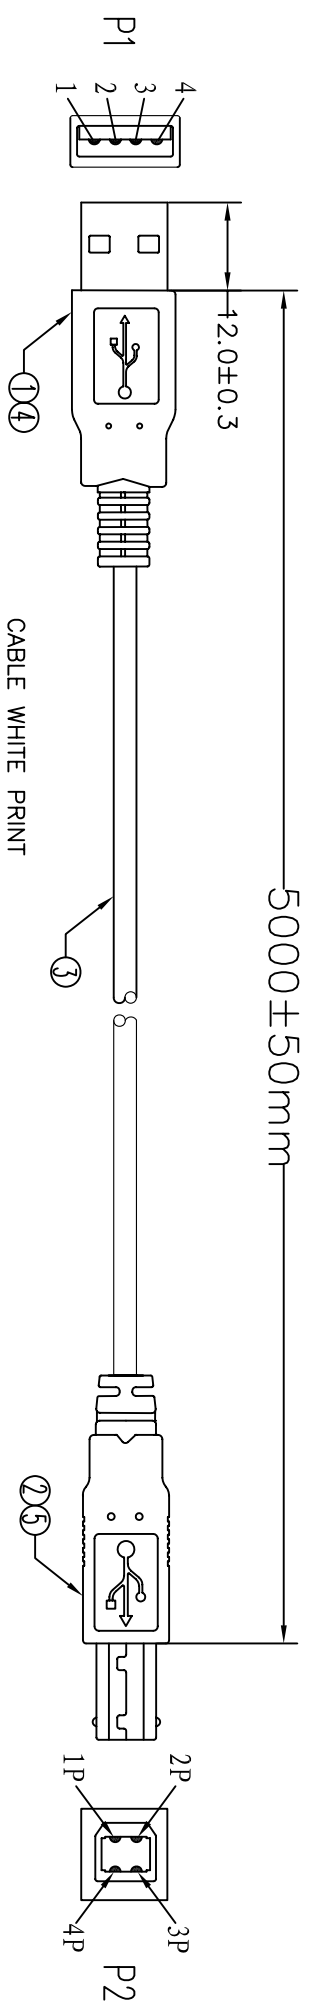

PIN ASSIGNMENT:

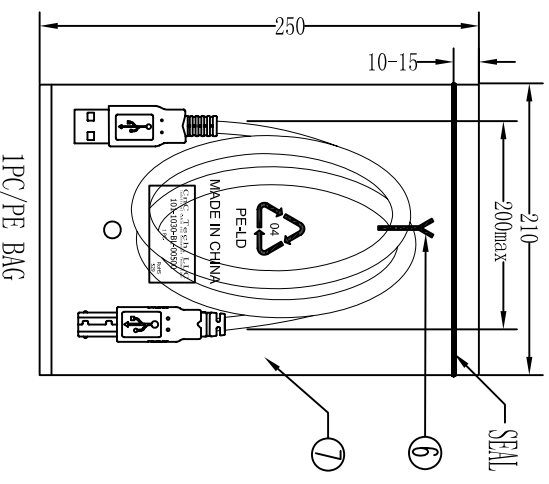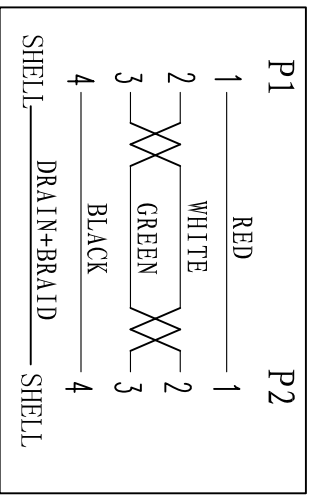

Electrical test:

1. 100% short, open, miswire test
2. Conduct resistance: 5 Ohm(max)
3. Insulation resistance: 5Mohm(min)
4. dielectric test: DC 300V

⑧	PE BAG	1/5	CLEAR SIZE: 330*380*0.05mm PRINT BLACK "MADE IN CHINA" + "5PCS".
⑦	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK "MADE IN CHINA" + "1PC".
⑥	TIE	1	BLACK L=150mm
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO.: MW-65)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO.: MW-40)
③	CABLE	1	BLACK USB1. 1 U12725 28#/1P+24#/2C+AEB OD: 4.7mm L=5000±20mm
②	CONN	1set	USB B MALE SHELL: NICKEL. PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB A MALE SHELL: NICKEL. PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE
NO.	NAME	QTY	SPECIFICATION

CNC Tech, LLC
Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1030-BL-00500
DECIDED		DATE	2011-10-25
VERSIONS/EDITION	A/0	PROJECTION	

4 3 2 1