

2% Zener Voltage Tolerance SMD Zener Diode

FEATURES

- Wide zener voltage range selection: 5.1V to 20V
- VZ Tolerance Selection of $\pm 2\%$
- Surface device type mountin
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21


APPLICATIONS

- Constant Voltage control

MECHANICAL DATA

- Case: SOD-523F
- Molding compound meets UL 94 V-0 flammability rating
- Moisture sensitivity level: level 1, per J-STD-020
- Packing code with suffix "G" means green compound (halogen-free)
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: 1.3mg $\pm 20\%$

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
V_Z	5.1-20	V
Test current I_{ZT}	5	mA
P_{tot}	150	mW
T_J Max.	150	$^{\circ}\text{C}$
Package	SOD-523F	
Configuration	Single dice	



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^{\circ}\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Total power dissipation	P_{tot}	150	mW
Junction temperature range	T_J	-55 to +150	$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^{\circ}\text{C}$

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	TYP	UNIT
Junction-to-ambient thermal resistance	$R_{\theta JA}$	833	$^{\circ}\text{C}/\text{W}$

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PART NUMBER	MARKING CODE	ZENER VOLTAGE			TEST CURRENT	REGULAR IMPEDANCE		TEST CURRENT	LEAKAGE CURRENT		TYPICAL TEMPERATURE COEFFICIENT	
		$V_Z @ I_{ZT}$			I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	$I_R @ V_R$		$T_C @ I_{ZT}$	
		V			mA	Ω	Ω	mA	μA	V	mV/ $^\circ\text{C}$	
		Min.	Nom.	Max.		Max.	Max.		Max.		Min.	Max.
BZX584B5V1	2Z2	5.00	5.1	5.20	5	60	480	1	2	2.0	-2.7	1.2
BZX584B5V6	2Z3	5.49	5.6	5.71	5	40	400	1	1	2.0	-2.0	2.5
BZX584B6V2	2Z4	6.08	6.2	6.32	5	10	150	1	3	4.0	0.4	3.7
BZX584B6V8	2Z5	6.66	6.8	6.94	5	15	80	1	2	4.0	1.2	4.5
BZX584B7V5	2Z6	7.35	7.5	7.65	5	15	80	1	1	5.0	2.5	5.3
BZX584B8V2	2Z7	8.04	8.2	8.36	5	15	80	1	0.7	5.0	3.2	6.2
BZX584B9V1	2Z8	8.92	9.1	9.28	5	15	100	1	0.5	6.0	3.8	7.0
BZX584B10	2Z9	9.80	10	10.20	5	20	150	1	0.2	7.0	4.5	8.0
BZX584B11	2Y1	10.78	11	11.22	5	20	150	1	0.1	8.0	5.4	9.0
BZX584B12	2Y2	11.76	12	12.24	5	25	150	1	0.1	8.0	6.0	10.0
BZX584B13	2Y3	12.74	13	13.26	5	30	170	1	0.1	8.0	7.0	11.0
BZX584B15	2Y4	14.70	15	15.30	5	30	200	1	0.1	10.5	9.2	13.0
BZX584B16	2Y5	15.68	16	16.32	5	40	200	1	0.1	11.2	10.4	14.0
BZX584B18	2Y6	17.64	18	18.36	5	45	225	1	0.1	12.6	12.4	16.0
BZX584B20	2Y7	19.60	20	20.40	5	55	225	1	0.1	14.0	14.4	18.0

ORDERING INFORMATION

PART NO.	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
BZX584Bxxx (Note1&2)	RS	G	SOD-523F	8K / 7" Reel

Notes:

- "xxx" defines voltage from 5.1V (BZX584B5V1) to 20V (BZX584B20)
- Whole series with green compound

EXAMPLE

EXAMPLE P/N	PART NO.	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
BZX584B5V1 RSG	BZX584B5V1	RS	G	Green compound

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Typical Forward Characteristics

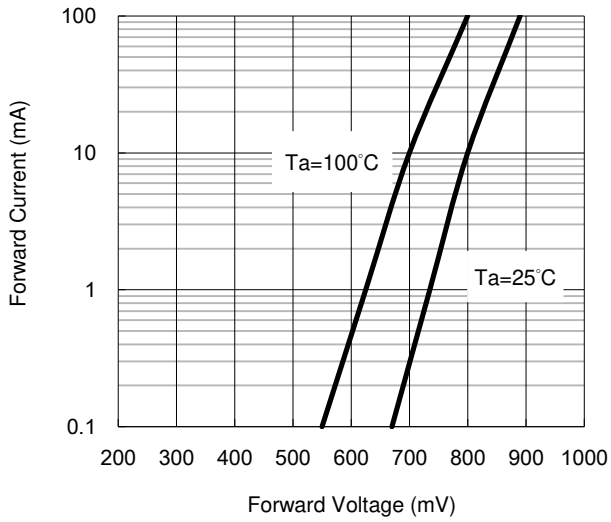


Fig. 2 Reverse Current vs Reverse Voltage

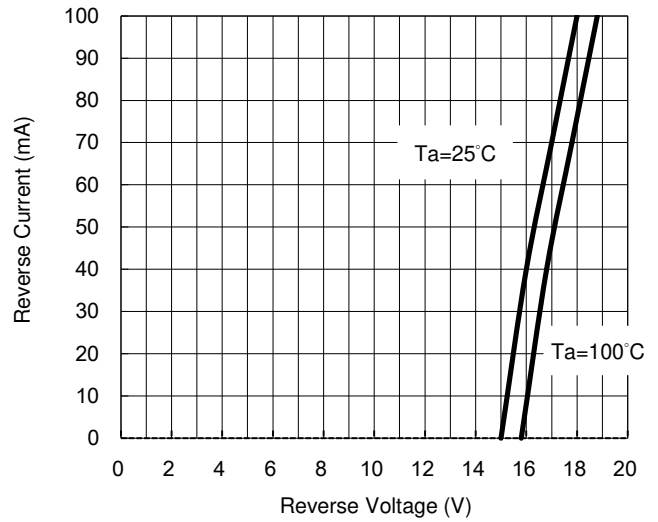


Fig.3 Admissible Power Dissipation Curve



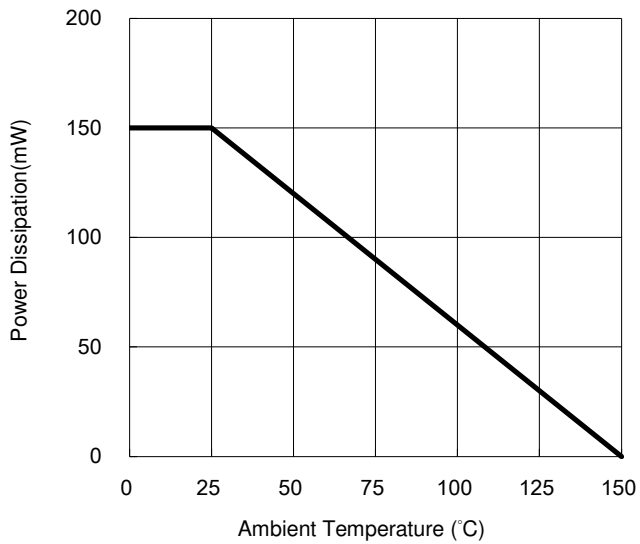


Fig.4 Typical Capacitance Characteristics

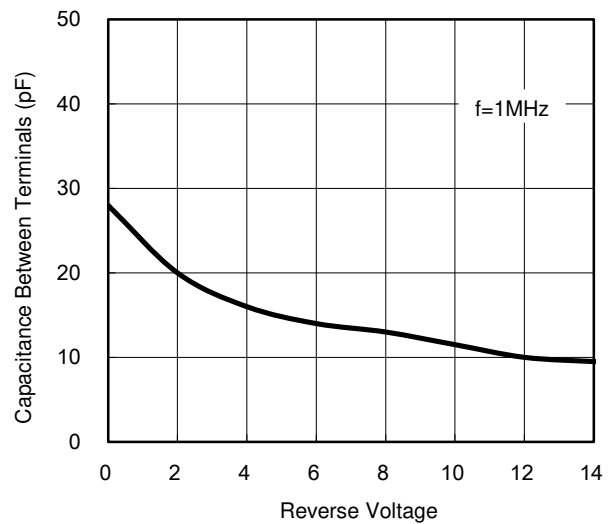


PACKAGE OUTLINE DIMENSION

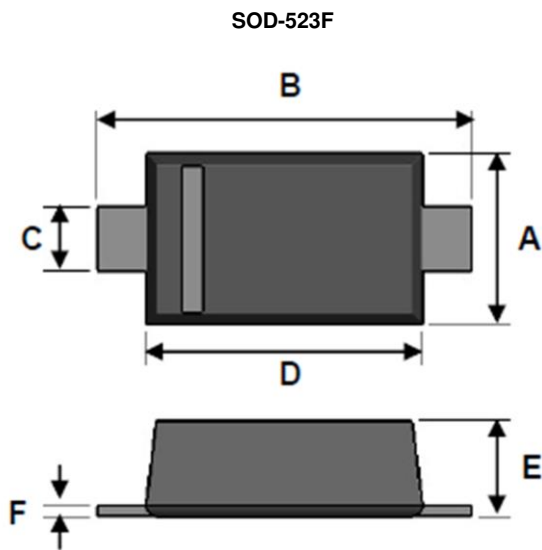

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	0.70	0.90	0.028	0.035
B	1.50	1.70	0.059	0.067
C	0.25	0.40	0.010	0.016
D	1.10	1.30	0.043	0.051
E	0.50	0.77	0.020	0.030
F	0.07	0.20	0.003	0.008

SUGGEST PAD LAYOUT

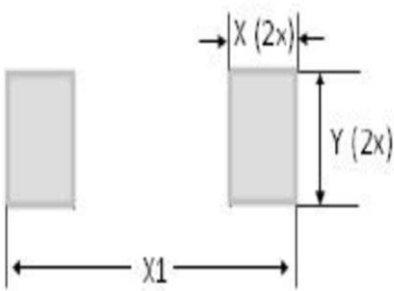

DIM.	Unit(mm)	Unit(inch)
	Typ.	Typ.
X	0.60	0.024
X1	2.30	0.091
Y	0.80	0.031

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.