
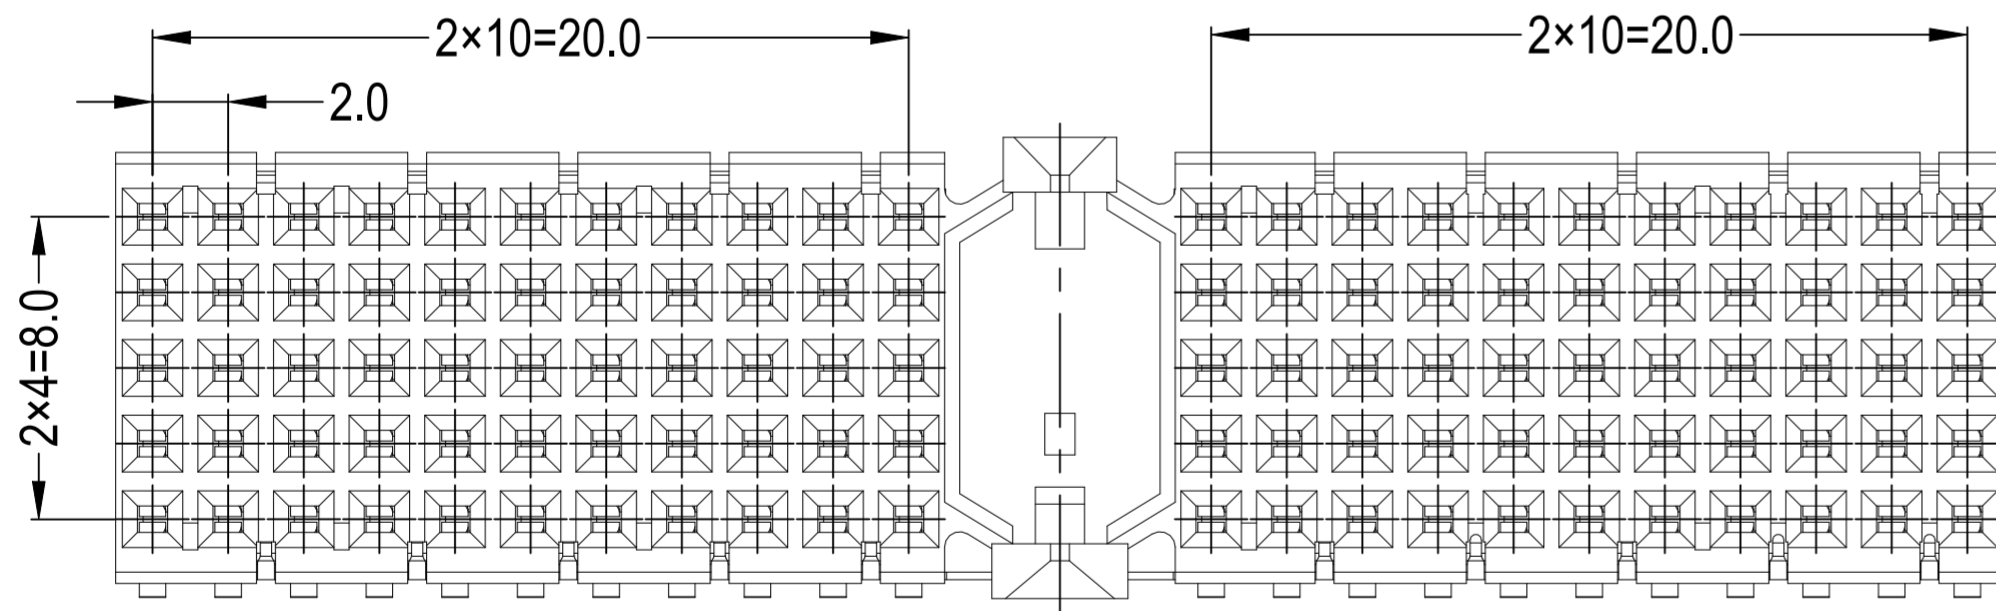
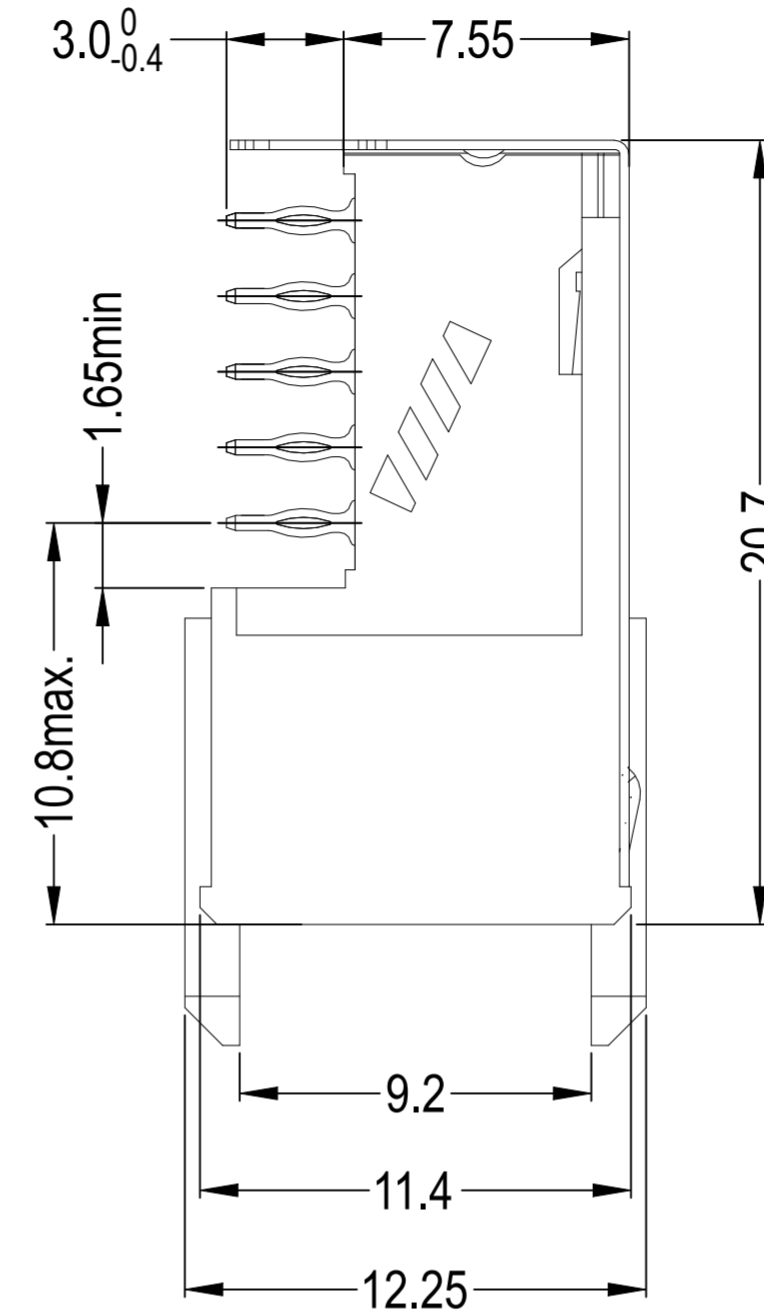



REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
B		ECR-21-112460	2SEP2021	TL HL

NOTES:

- 1 MATERIAL: CONTACTS & SHIELD: COPPER ALLOY HOUSING: GLASSFILLED POLYESTER, COLOR NATURAL
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND EON PIN SECTION: 0.5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 ASSEMBLY PRINTED WITH P/N AND DATECODE
- 5 HOLE PATTERN FOR FEMALE CONNECTOR TYPE A 110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- 6 ROW "f" 13 PLATED THROUGH HOLES FOR UPERSHIELD

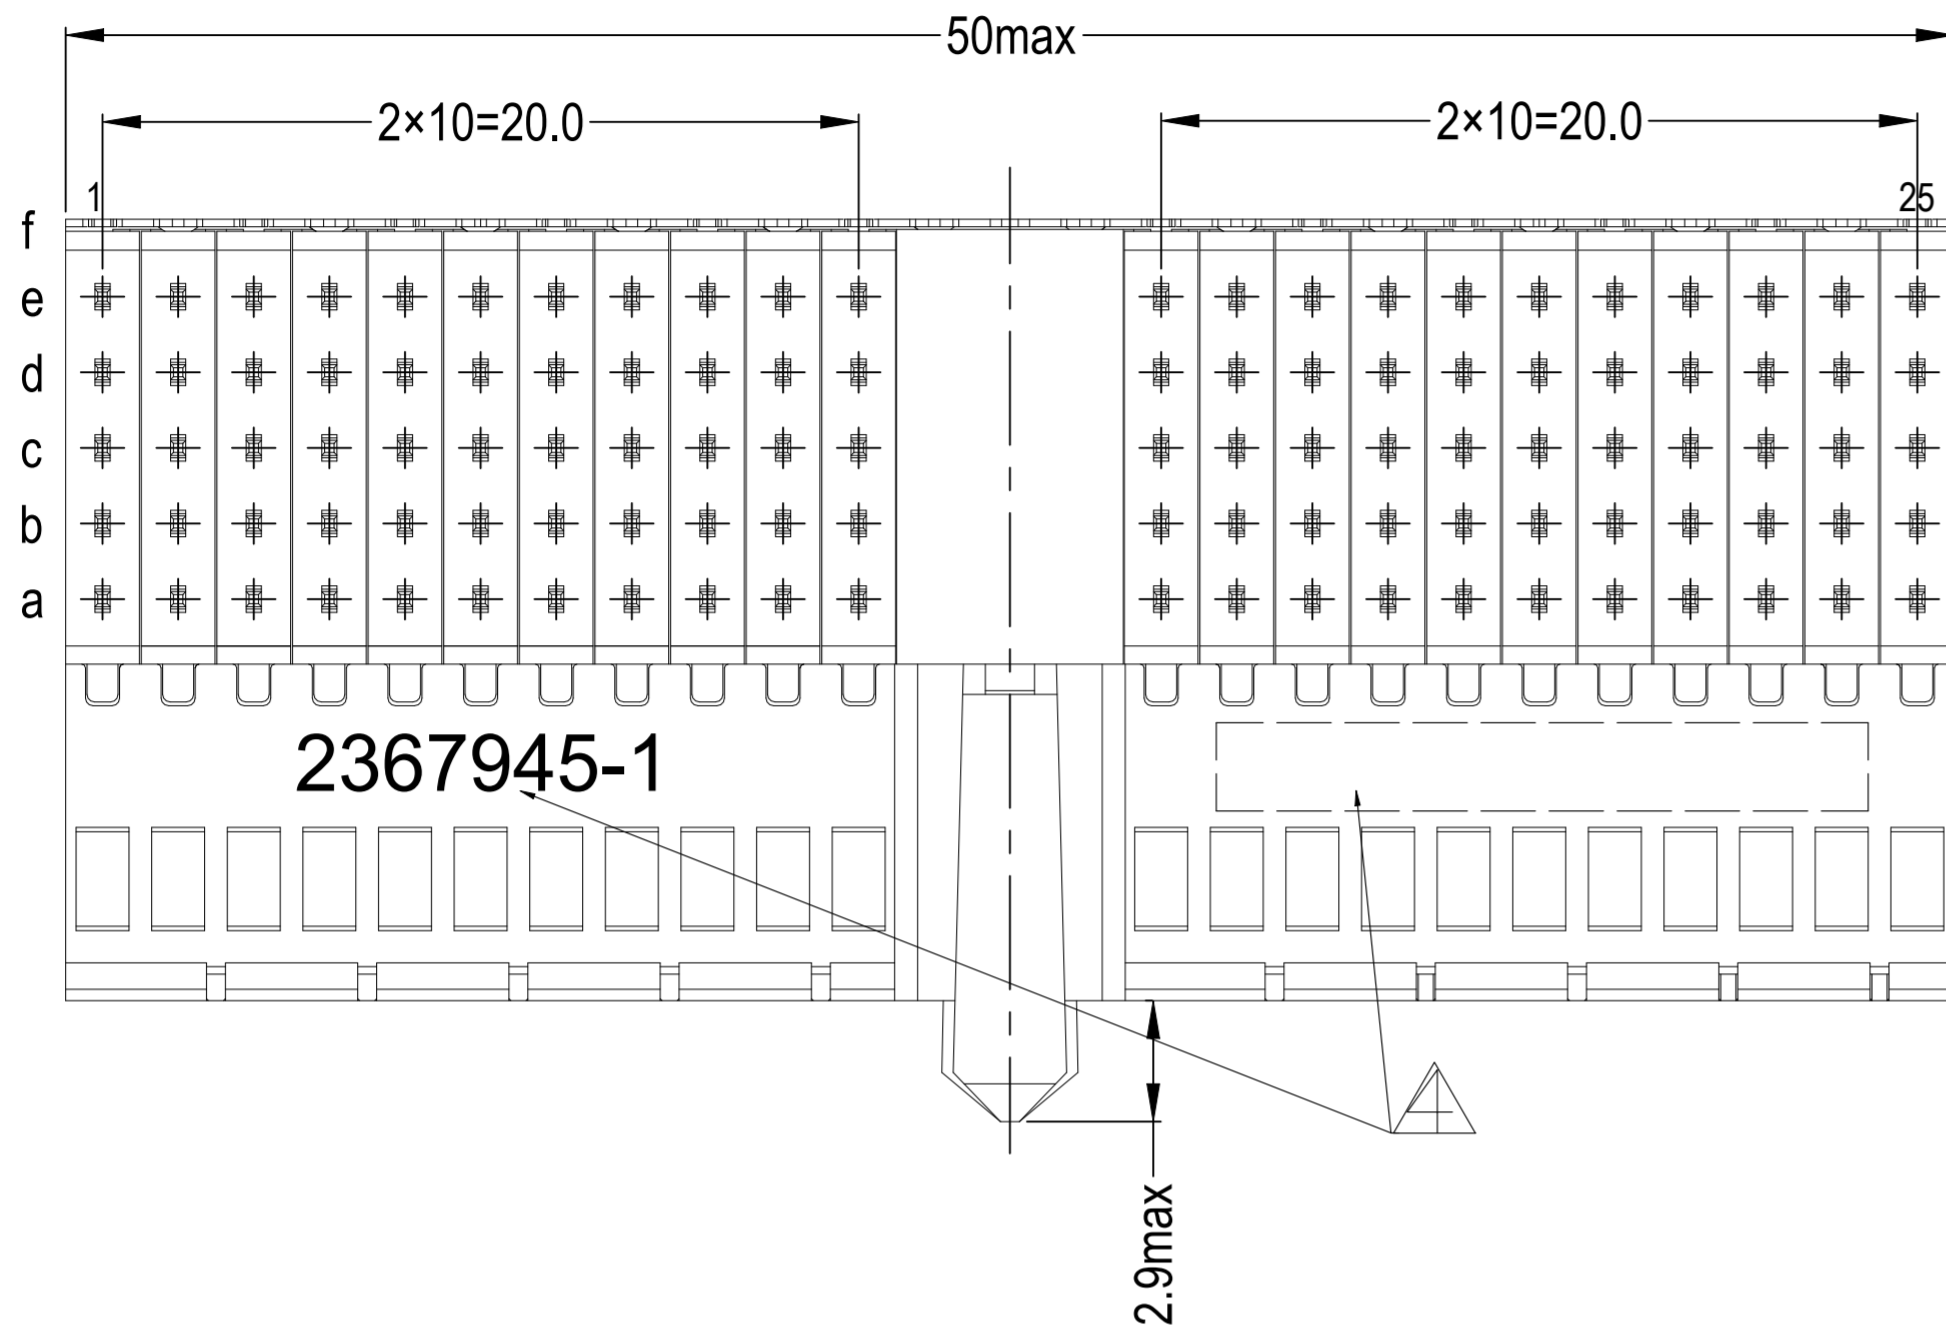

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

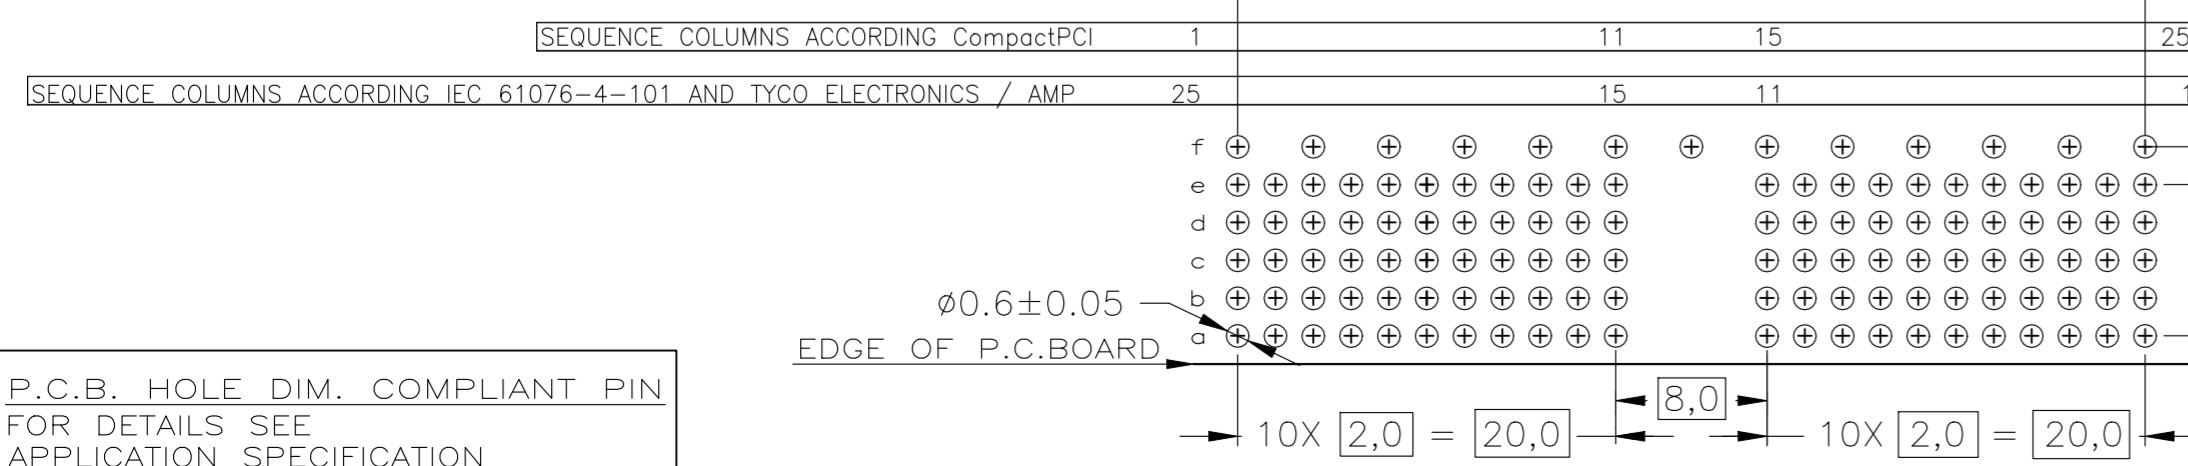

P.C.B. HOLE DIM. COMPLIANT PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	±0.2
6-PLG	±
1-PLG	±
2-PLG	±
3-PLG	±
4-PLG	±
ANGLES	±
MATERIAL	FINISH
-	-

APVD	14JAN2020	NAME	TONY LI
CHK	14JAN2020	NAME	ALEX SHOAL
PRODUCT SPEC	108-60123	SIZE	A2
APPLICATION SPEC	114-19029	CAGE CODE	00779
WEIGHT	0	DRAWING NO	C=2367945
CUSTOMER DRAWING	SCALE 5:1	SHEET 1 of 1	REV B

TE TE Connectivity Ltd.

Z-PACK 2mm HM
TYPE A - 25 COLUMNS
PRE-SHIELDED RECEPTACLE

2367945