



10 9 8 7 6 5 4 3 2 1

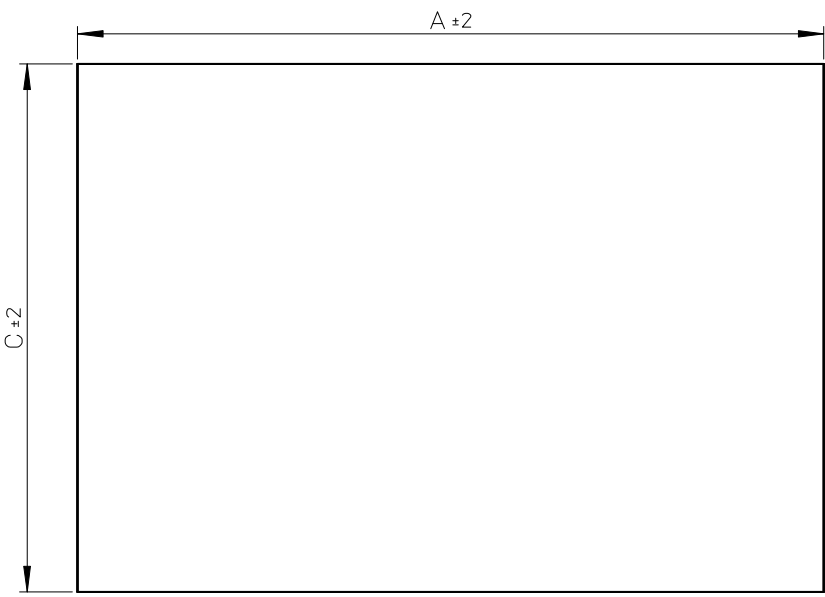

NOTES:

1. 材料 MATERIAL
PS-504800-001 参照
SEE PS-504800-001
2. ELV & RoHS 適合品
ELV & RoHS COMPLIANT
3. UL94 V-0 相当
UL94 V-0 EQUIVALENT
4. 製品番号 504800
PRODUCT No. ** ** 粘着型番
ADHESIVE
製品形状
SIZE
シリーズ番号
SERIES
5. シートの電気特性や機械特性については PS-504800-001 を参照
ELECTRICAL & MECHANICAL PROPERTY : SEE PS-504800-001

DETAIL 1

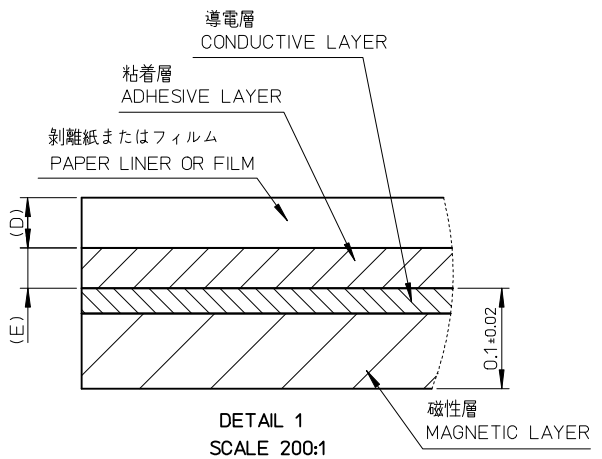

DETAIL 1
SCALE 200:1

◎ 耐リフロー粘着剤 REFLOW COMPATIBLE ADHESIVE	5048007003
◎ 標準粘着:再剥離可能タイプ STANDARD ADHESIVE : RE-STICKABLE TYPE	5048007001
◎ 粘着無し W/O ADHESIVE	5048007000
粘着層特徴 ADHESIVE FEATURE	ORDER NO.

◎ 19.08g	0.030	0.07	210	297	5048007003	50480070**
22.20g	0.047	0.105	210	297	5048007001	
11.85g	-	-	210	297	5048007000	
WEIGHT	E	D	C	A	ORDER NO.	MODEL NO.

REVISED EC NO: J2015-0054 DRWN: NIITA 2014/04/04 CHKD: APPR: KCHIKANO 2014/07/11	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:2	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	± 0.2	DRAWN BY NIITA		DATE 2013/09/25		HOZOX TWO LAYER NOISE SUPPRESSION SHEET molex DOCUMENT NO. SD-504800-003 SHEET NO. 1 OF 1
	10 OVER 30 UNDER	± 0.25	CHECKED BY SHOSHIKAWA		DATE 2013/09/27		
	30 OVER	± 0.3	APPROVED BY SHOSHIKAWA		DATE 2013/10/01		
ANGULAR ±1 °		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-504800-003			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

9 8 7 6 5 4 3 2