

Ratings

Voltage: 300 V
 Temperature
 Static: -40 to 105 °C
 Dynamic: -20 to 105 °C
 Flammability: VW-1
 Water resistant: 75 °C
 Oil resistant: 60 °C (jacket)
 ≥50% elongation and tensile strength after aging
 UV resistance: jacket, 720 hours xenon or carbon arc exposure
 ≥80% tensile strength and elongation after aging

Conductor

Conductor count: 3
 Gauge: 30 AWG 0.05 mm²
 Material: tinned copper strands
 Strand size: Ø 0.1 mm x 7
 Resistance at 20 °C: 381 Ω /km Max

Insulator

Material: PVC
 Color: red, black, white
 Diameter: Ø 1.1 ±0.10 mm
 Nominal thickness: 0.38 mm
 Resistance at 20 °C: 10 MΩ /km Min

Drain

Stranding: Ø 0.1 mm x 7
 Material: tinned copper strands

Shield



Type: aluminum mylar + tinned copper braid
 Coverage: 65% min braid, 100% foil
 Braid stranding: Ø0.10 mm

Outer jacket

Material: PVC, 80A
 Color: black
 Diameter: Ø 4.5 ±0.20 mm
 Nominal thickness: 0.80 mm

Wire marking: E339579 UL AWM STYLE 20387 30 AWG 105°C
 300V VW-1 60°C OIL RESISTANT UV RESISTANT TENSILITY

Use: External wiring

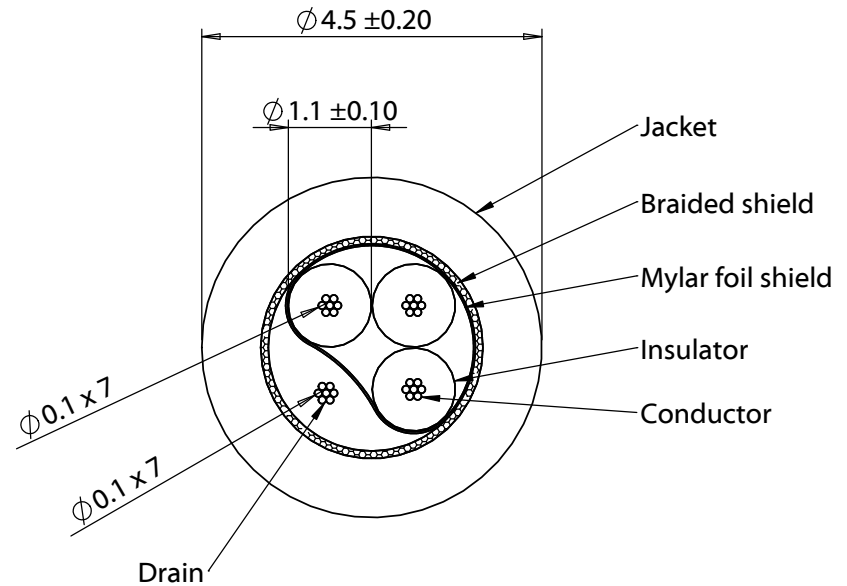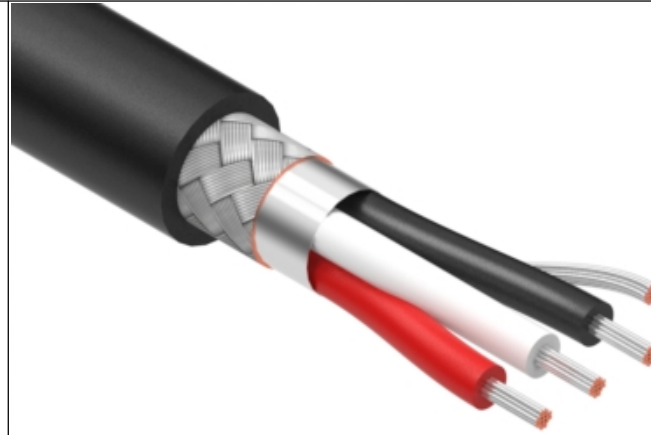

| | | | | | |
|-----------|-----------|-----------------|---|--|---|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 8/25/2020 | Initial release | JC <small>Digitally signed by JC Date: 2020.08.26 14:37:04 -07'00'</small> | RoHS compliant | |
| | | | Verified: | Function test: no open, no short circuit, no intermittent | Size: Part number: |
| | | | AW <small>Digitally signed by AW Date: 2020.08.26 15:57:38 -07'00'</small> | Description: | A 30-01574 |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Wire, 3C TS, 30 AWG, UL20387, 300V, 105C, 60C oil, UV, 4.5 mm, shielded, VW-1, PVC, 80A, black | Scale: 10:1 |
| | | | | | Sheet 1 of 1 |

5

4

3

2

1