


т	۵	н т	m	0

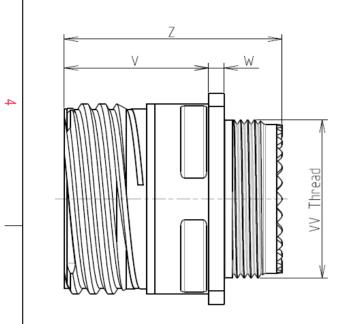

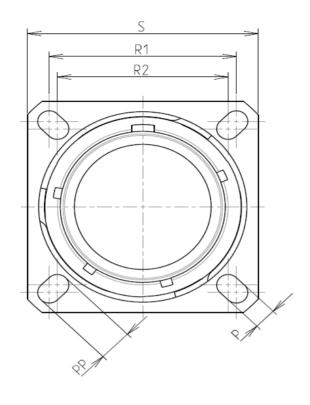



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +200°C			
	-Salt Spray	: 48 hours			

8D 0

G

13

F

03

Ρ

F

D L

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M18x1-6g


Delivered W/O Contacts


CONTACT LAYOUT : 13-03

CONTACT TYPE : PIN(500 Matings)

Е

ORIENTATION : D



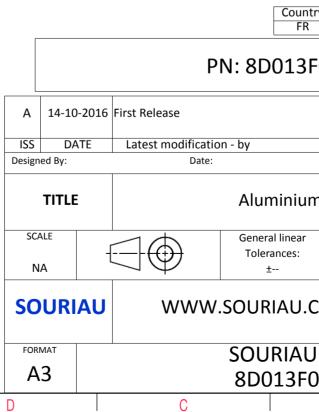

	ω		Þ		_
ſ					4
AS EXAMP	PLE				3
s which d er of the l	oes not co Parties or k rechnical n Jurisd	by a third par			2
		CUSTOME	R DRAWING	MOD N°	
um Receptacle 8D series					
ar :	NPRDS / PROJECT 859				
J.CON	1	it mus	cument is the prop SOURIAU It not be reproduc icated without pe	ed or	1
	RG N°			SHEET	
F03P	B		A	1/2	J

	Ŧ	G	г	m	D	0	
		Contact Layout				P;	anel Cutou
4		03 () () () () () () () () () () () () ()			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47				Dim	ØT
ى						ØA ØAA R1 ØT	
	+					SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts wh by either of
S						PN: 80	Countr FR D013F
					A 14-10- ISS DA Designed By:	2016 First Release TE Latest modification - by Date:	
					SCALE	Gene	minium tral linear
_					NA SOURIA		± RIAU.C
					FORMAT A3	8D(JRIAU 013F0
	Н	G	F	E	D	C	

