



ON Semiconductor®

NC7WZ14

TinyLogic® UHS Dual Inverter with Schmitt Trigger Inputs

Features

- Ultra-High Speed: t_{PD} 3.2ns (Typical) into 50pF at 5V V_{CC}
- High Output Drive: $\pm 24mA$ at 3V V_{CC}
- Broad V_{CC} Operating Range: 1.65V to 5.5V
- Matches Performance of LCX when Operated at 3.3V V_{CC}
- Power Down High Impedance Inputs/Outputs
- Over-Voltage Tolerance Inputs Facilitate 5V to 3V Translation
- Proprietary Noise/EMI Reduction Circuitry
- Ultra-Small MicroPak™ Packages
- Space-Saving SC70 Package

Description

The NC7WZ14 is a dual inverter with Schmitt trigger input from ON Semiconductor's Ultra-High Speed (UHS) Series of TinyLogic. The device is fabricated with advanced CMOS technology to achieve ultra-high speed with high output drive while maintaining low static power dissipation over a very broad V_{CC} operating range. The device is specified to operate over the 1.65V to 5.5V V_{CC} range. The inputs and outputs are high-impedance when V_{CC} is 0V. Inputs tolerate voltages up to 7V independent of V_{CC} operating voltage. Schmitt trigger inputs achieve typically 1V hysteresis between the positive and negative-going input threshold voltage at 5V.

Ordering Information

Part Number	Operating Temperature	Top Mark	Package	Packing Method
NC7WZ14P6X	-40 to +85°C	Z14	6-Lead SC70, EIAJ SC-88a, 1.25mm Wide	3000 Units on Tape & Reel
NC7WZ14EP6X	-40 to +125°C	Z14	6-Lead SC70, EIAJ SC-88a, 1.25mm Wide	3000 Units on Tape & Reel
NC7WZ14L6X	-40 to +85°C	A9	6-Lead MicroPak™, 1.00mm Wide	5000 Units on Tape & Reel
NC7WZ14FHX	-40 to +85°C	A9	6-Lead, MicroPak2, 1x1mm Body, .35mm Pitch	5000 Units on Tape & Reel

Connection Diagrams

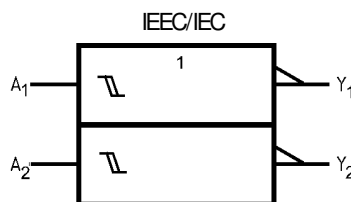


Figure 1. Logic Symbol

Pin Configurations




Figure 2. SC70 (Top View)





Figure 3. MicroPak (Top Through View)



Notes:

1. AAA represents Product Code Top Mark (see ordering code).
2. Orientation of Top Mark determines Pin One location. Read the top product code mark left to right. Pin One is the lower left pin.

Figure 4. SC70 Pin 1 Orientation

Pin Definitions

Pin # SC70	Pin # MicroPak	Name	Description
1	1	A ₁	Input
2	2	GND	Ground
3	3	A ₂	Input
4	4	Y ₂	Output
5	5	V _{CC}	Supply Voltage
6	6	Y ₁	Output

Function Table

Y = /A

Inputs	Output
A	Y
L	H
H	L

H = HIGH Logic Level

L = LOW Logic Level

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter		Min.	Max.	Unit	
V_{CC}	Supply Voltage		-0.5	7.0	V	
V_{IN}	DC Input Voltage		-0.5	7.0	V	
V_{OUT}	DC Output Voltage		-0.5	7.0	V	
I_{IK}	DC Input Diode Current	$V_{IN} < -0.5V$		-50	mA	
I_{OK}	DC Output Diode Current	$V_{OUT} < -0.5V$		-50	mA	
I_{OUT}	DC Output Current			±100	mA	
I_{CC} or I_{GND}	DC V_{CC} or Ground Current			±50	mA	
T_{STG}	Storage Temperature Range		-65	+150	°C	
T_J	Junction Temperature Under Bias			+150	°C	
T_L	Junction Lead Temperature (Soldering, 10 Seconds)			+260	°C	
P_D	Power Dissipation	SC70-6	$T_A=85^\circ C$	170	mW	
			$T_A=125^\circ C$	104		
		MicroPak-6				130
		MicroPak2-6				120
ESD	Human Body Model, JEDEC:JESD22-A114			4000	V	
	Charge Device Model, JEDEC:JESD22-C101			2000		

Recommended Operating Conditions⁽³⁾

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. ON Semiconductor does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Conditions	Min.	Max.	Unit
V_{CC}	Supply Voltage Operating		1.65	5.50	V
	Supply Voltage Data Retention		1.5	5.5	
V_{IN}	Input Voltage		0	5.5	V
V_{OUT}	Output Voltage		0	V_{CC}	V
T_A	Operating Temperature	SC70-6	-40	+125	°C
		MicroPak-6	-40	+85	
		MicroPak2-6	-40	+85	
θ_{JA}	Thermal Resistance	SC70-6		390	°C/W
		MicroPak-6		500	
		MicroPak2-6		560	

Note:

- Unused inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

Symbol	Parameter	V _{CC} (V)	Conditions	T _A =+25°C			T _A =-40 to +85°C		T _A =-40 to +125°C		Units	
				Min.	Typ.	Max.	Min.	Max.	Min.	Max.		
V _P	Positive Threshold Voltage	1.65		0.60		1.40	0.60	1.40	0.60	1.40	V	
		1.80		0.70		1.50	0.70	1.50	0.70	1.50		
		2.30		1.00		1.80	1.00	1.80	1.00	1.80		
		3.00		1.30		2.20	1.30	2.20	1.30	2.20		
		4.50		1.90		3.10	1.90	3.10	2.00	3.20		
		5.50		2.20		3.60	2.20	3.60	2.30	3.70		
V _N	Negative Threshold Voltage	1.65		0.20	0.50	0.80	0.20	0.80	0.30	0.90	V	
		1.80		0.25	0.56	0.90	0.25	0.90	0.35	1.00		
		2.30		0.40	0.75	1.15	0.40	1.15	0.50	1.20		
		3.00		0.60	0.98	1.50	0.60	1.50	0.70	1.60		
		4.50		1.00	1.42	2.00	1.00	2.00	1.10	2.20		
		5.50		1.20	1.68	2.30	1.20	2.30	1.40	2.50		
V _H	Hysteresis Voltage	1.65		0.10	0.48	0.90	0.10	0.90	0.10	0.90	V	
		1.80		0.15	0.51	1.00	0.15	1.00	0.15	1.00		
		2.30		0.25	0.62	1.10	0.25	1.10	0.25	1.10		
		3.00		0.40	0.76	1.20	0.40	1.20	0.40	1.20		
		4.50		0.60	1.01	1.50	0.60	1.50	0.60	1.50		
		5.50		0.70	1.20	1.70	0.70	1.70	0.70	1.70		
V _{OH}	HIGH Level Output Voltage	1.65	V _{IN} =V _{IL} , I _{OH} =-100μA	1.55	1.65		1.55		1.55		V	
		1.80		1.70	1.80		1.70		1.70			
		2.30		2.20	2.30		2.20		2.20			
		3.00		2.90	3.00		2.90		2.90			
		4.50		4.40	4.50		4.40		4.40			
		1.65	I _{OH} =-4mA	1.29	1.52		1.29		1.26			
		2.30		I _{OH} =-8mA	1.90	2.14		1.90		1.80		
		3.00		I _{OH} =-16mA	2.40	2.75		2.40		2.30		
		3.00		I _{OH} =-24mA	2.30	2.62		2.30		2.20		
		4.50		I _{OH} =-32mA	3.80	4.13		3.80		3.70		
V _{OL}	LOW Level Output Voltage	1.65	V _{IN} =V _{IH} , I _{OL} =100μA		0.00	0.10		0.10		0.10	V	
		1.80			0.00	0.10		0.10		0.10		
		2.30			0.00	0.10		0.10		0.10		
		3.00			0.00	0.10		0.10		0.10		
		4.50			0.00	0.10		0.10		0.10		
		1.65	I _{OL} =4mA		0.08	0.24		0.24		0.26		
		2.30		I _{OL} =8mA		0.10	0.30		0.30			0.32
		3.00		I _{OL} =16mA		0.16	0.40		0.40			0.43
		3.00		I _{OL} =24mA		0.24	0.55		0.55			0.60

Symbol	Parameter	V _{CC} (V)	Conditions	T _A =+25°C			T _A =-40 to +85°C		T _A =-40 to +125°C		Units
				Min.	Typ.	Max.	Min.	Max.	Min.	Max.	
		4.50	I _{OL} =32mA		0.25	0.55		0.55		0.60	
I _{IN}	Input Leakage Current	0 to 5.5	V _{IN} =5.5V, GND			±0.1		±1.0		±2.0	μA
I _{OFF}	Power Off Leakage Current	0	V _{IN} or V _{OUT} =5.5V			1		10		20	μA
I _{CC}	Quiescent Supply Current	1.65 to 5.50	V _{IN} =5.5V, GND			1.0		10		20	μA

AC Electrical Characteristics

Symbol	Parameter	V _{CC} (V)	Conditions	T _A =+25°C			T _A =-40 to +85°C		T _A =-40 to +125°C		Units	Figure
				Min.	Typ.	Max.	Min.	Max.	Min.	Max.		
t _{PLH} , t _{PHL}	Propagation Delay	1.65	C _L =15pF, R _L =1MΩ	2.5	7.6	13.1	2.5	14.5	2.5	14.7	ns	Figure 5 Figure 6
		1.80		2.5	6.3	10.9	2.5	12.0	2.5	12.3		
		2.50 ± 0.20		1.8	4.3	7.4	1.8	8.1	1.8	8.4		
		3.30 ± 0.30		1.5	3.3	5.0	1.5	5.5	1.5	5.8		
		5.00 ± 0.50		1.0	2.7	4.1	1.0	4.5	1.0	4.8		
		3.30 ± 0.30	C _L =50pF, R _L =500Ω	1.8	4.0	6.0	1.8	6.6	1.8	6.9	ns	Figure 5 Figure 6
		5.00 ± 0.50		1.2	3.2	4.9	1.2	5.4	1.2	5.7		
C _{IN}	Input Capacitance	0.00			2.5						pF	
C _{PD}	Power Dissipation Capacitance ⁽⁴⁾	3.30			11.0						pF	Figure 7
		5.00			12.5							

Note:

4. C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. C_{PD} is related to I_{CCD} dynamic operating current by the expression: I_{CCD}=(C_{PD})(V_{CC})(f_{IN})+(I_{CC}static).




Figure 5. AC Test Circuit

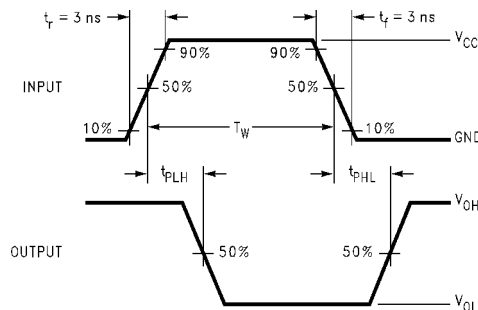


Figure 6. AC Waveforms

Note:

5. CL includes load and stray capacitance; Input PRR=1.0MHz; t_w=500ns




Figure 7. I_{CCD} Test Circuit

Note:

6. Input=AC Waveform; t_r=t_f=1.8ns; PRR=variable; Duty Cycle =50%.

Physical Dimensions

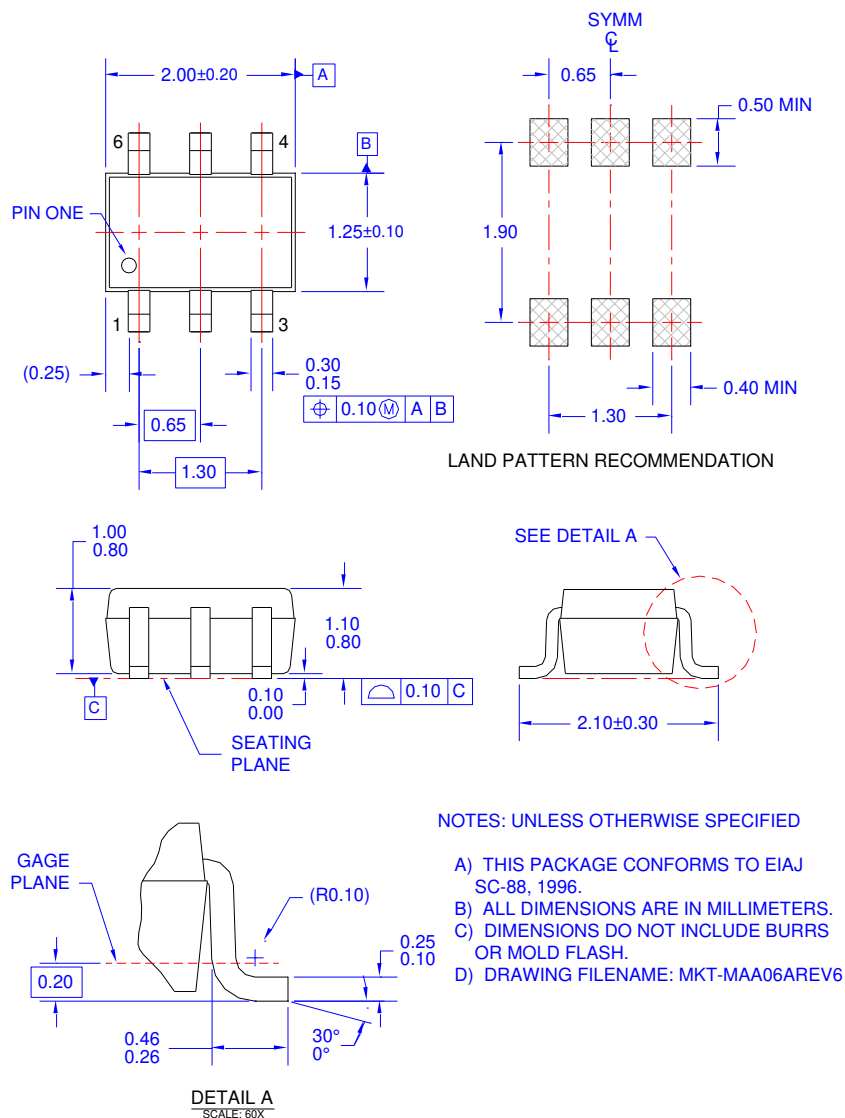



Figure 8. 6-Lead, SC70, EIAJ SC-88a, 1.25mm Wide

Package drawings are provided as a service to customers considering ON Semiconductor components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a ON Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of ON Semiconductor's worldwide terms and conditions, specifically the warranty therein, which covers ON Semiconductor products.

Tape and Reel Specification

Package Designator	Tape Section	Cavity Number	Cavity Status	Cover Type Status
P6X	Leader (Start End)	125 (Typical)	Empty	Sealed
	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (Typical)	Empty	Sealed

Physical Dimensions

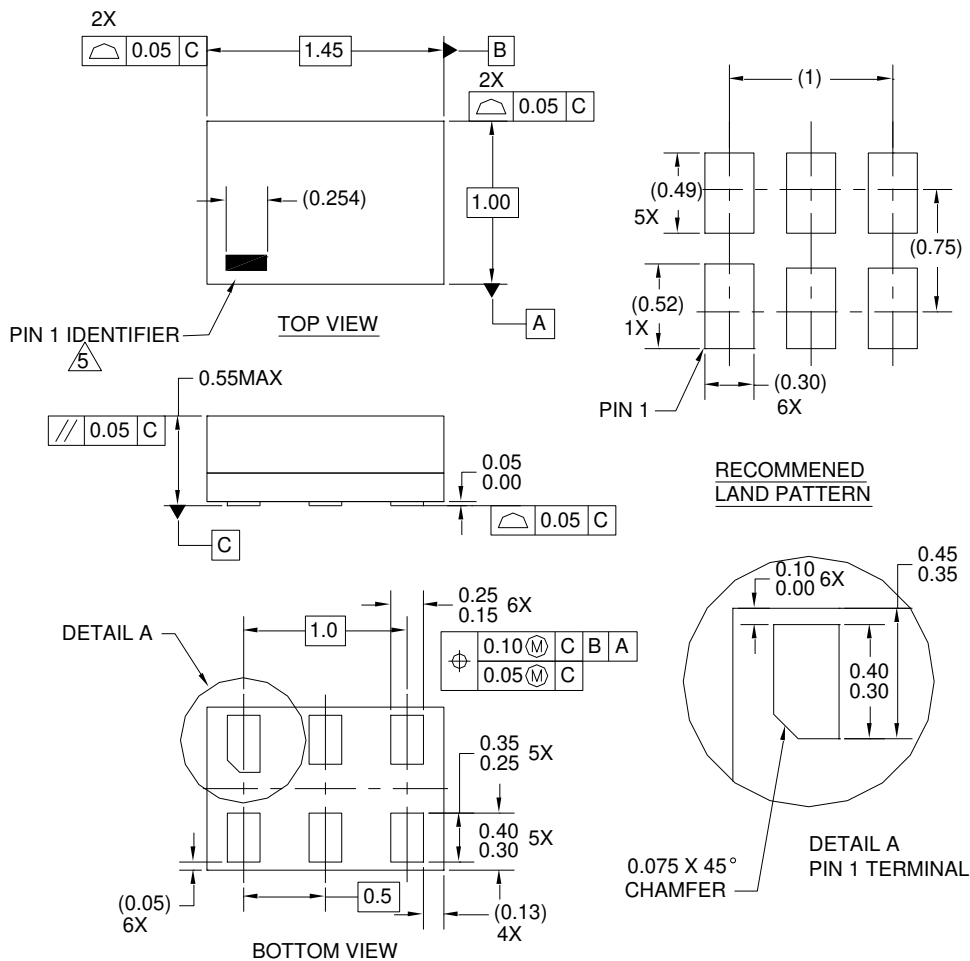

Notes:

1. CONFORMS TO JEDEC STANDARD M0-252 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y14.5M-1994
4. FILENAME AND REVISION: MAC06AREV4
5. PIN ONE IDENTIFIER IS 2X LENGTH OF ANY OTHER LINE IN THE MARK CODE LAYOUT.

Figure 9. 6-Lead, MicroPak™, 1.0mm Wide

Package drawings are provided as a service to customers considering ON Semiconductor components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a ON Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of ON Semiconductor's worldwide terms and conditions, specifically the warranty therein, which covers ON Semiconductor products.

Tape and Reel Specification

Package Designator	Tape Section	Cavity Number	Cavity Status	Cover Type Status
L6X	Leader (Start End)	125 (Typical)	Empty	Sealed
	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (Typical)	Empty	Sealed

Physical Dimensions

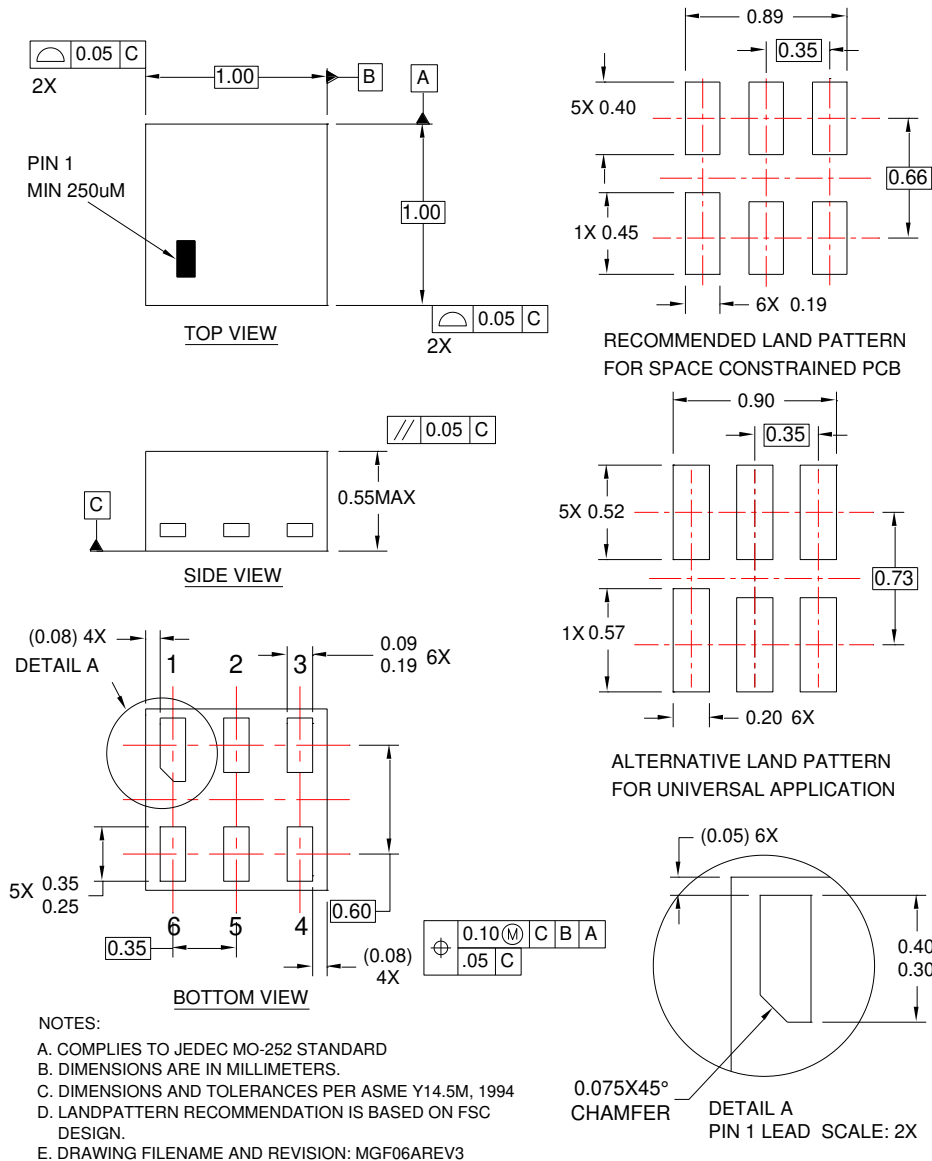


Figure 10. 6-Lead, MicroPak2, 1x1mm Body, .35mm Pitch

Package drawings are provided as a service to customers considering ON Semiconductor components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a ON Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of ON Semiconductor's worldwide terms and conditions, specifically the warranty therein, which covers ON Semiconductor products.

Tape and Reel Specification

Package Designator	Tape Section	Cavity Number	Cavity Status	Cover Type Status
FHX	Leader (Start End)	125 (Typical)	Empty	Sealed
	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (Typical)	Empty	Sealed

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free
 USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
 USA/Canada.
Europe, Middle East and Africa Technical Support:
 Phone: 421 33 790 2910
Japan Customer Focus Center
 Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
 For additional information, please contact your local Sales Representative