




**SPECIFICATION SHEET**

<b>SPECIFICATION SHEET NO.</b>	Q0114- RB32M00000L515
<b>DATE</b>	Jan. 14, 2023
<b>REVISION</b>	A0
<b>DESCRIPTION</b>	<p>MHz Thru-Hole Crystal Oscillator, L13.2*W13.2*H5.08mm,  Half-Size/8 pin, CO8 series  32.00000MHz, 5.0V, +/-50ppm, Symmetry 45/55,  Operating Temp. Range -40°C ~+85°C,  HCMOS//50pF, Supply Current 20mA Max, Tristate Via Pin 1  Thru-Hole type, Packed in Tube, 40pcs/Tube  RoHS/RoHS III compliant</p>
<b>CUSTOMER</b>	
<b>CUSTOMER PART NUMBER</b>	
<b>CROSS REF. PART NUMBER</b>	
<b>ORIGINAL PART NUMBER</b>	TGS CO851BGI05 BLF-32M000
<b>PART CODE</b>	RB32M00000L515

<b>VENDOR APPROVE</b>			
Issued/Checked/Approved			
DATE: Jan. 14, 2023			

<b>CUSTOMER APPROVE</b>
DATE:

## MHZ THRU-HOLE CRYSTAL OSCILLATOR CO8 SERIES

### MAIN FEATURE

- MHz Thru-Hole Crystal Oscillator, L13.2\*W13.2\*H5.08mm
- Industry-standard
- Hermetically sealed package for reliability
- Tristate function -Enable
- Cross more competitors part
- RoHS/RoHS III compliant



### APPLICATION

- Communication Electronics

### PART CODE GUIDE

**RFQ**

[Request For Quotation](#)


RB	32M00000	L	515
1	2	3	4

- 1) RB: Part family Code for MHz Thru-Hole Crystal Oscillator, L13.2\*W13.2\*H5.08mm, Half-Size/8 pin, CO8 series
- 2) 32M00000: Frequency range code for 32.00000MHz
- 3) L: Thru Hole type, Packed in Tube, 40pcs/Tube
- 4) 515: Specification code for original part No.: **TGS CO851BGI05 BLF-32M000**


## MHZ THRU-HOLE CRYSTAL OSCILLATOR CO8 SERIES

**DIMENSION (Unit: mm, Tol. +/-0.15mm)**

Image for reference

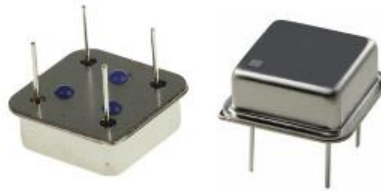



CO8



### Marking 1

Line 1: 32.0000

Line 2: Special Code

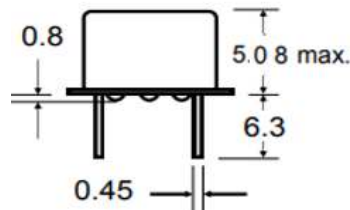

### Pin Function


#1 Tristate Enable Via #1

#4 Ground

#5 Output

#8 VDD

### Circuit Principle

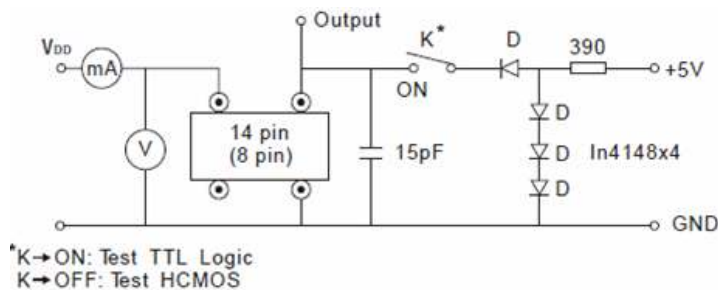


## MHZ THRU-HOLE CRYSTAL OSCILLATOR CO8 SERIES

### ELECTRICAL PARAMETERS

Parameter		Part No. Symbol	Units	Value			Condition
				Min.	Typical	Max.	
Original Manufacturer		TGS	TGS Crystals				
Holder Type		CO8	MHz Thru-Hole Crystal Oscillator, CO8 Series, L13.2*W13.2*H5.08mm, Half-Size/8 pin				
Supply Voltage		5	V	5.0			+/-10%
Enable/Disable -Tristate Function		1		Tristate function - Enable			@ Control via pin 1
Overall Freq. Tolerance		B	ppm	-50		+50	@25°C
Operating Temp. Range		G	°C	-40		+85	
Storage Temp. Range			°C	-55		+125	
Symmetry		I	%	45		55	
Output	V OH		V	90%			High (Logic "1")
	V OL		V			10%	Low (Logic "0")
	Load		pF	50			
Output Waveform		05		HCMOS			@OutputLoad 50pF
Startup Time			ms			10	
Supply Current			mA			20	
Rise/ Fall time			ns			10	
Phase Jitter			ps		N/A		
Aging			ppm/year			±3	@1 <sup>st</sup> year
Others	Package	B	Thru - Hole type, Packed in Tube, 40pcs/Tube				
	RoHS Status	LF	RoHS III compliant				
	Add Value		N/A				
	Internal Control Code *		N/A				
Frequency Range		32M000	32.00000MHz				

Note: 1) Original Part Number: **TGS CO851BGI05 BLF-32M000**

2)  Internal Control Code- 2 letter or digits; Blank: N/A

1/14/2023

4

## MHZ THRU-HOLE CRYSTAL OSCILLATOR CO8 SERIES

### ENVIRONMENTAL AND TECHNICAL CONDITIONS

Test Items	Test Method And Conditions
Temperature Cycle	Mil-std 883, Method 1010, 10 Cycles -20° C To 85° C
Shock	Mil-std-202, Method 213, Test Condition C
Vibration	Mil-std-202, Method 204, Test Condition A
Resistance To Soldering Heat	Mil-std-202, Method 210, Test Condition B
Humidity	85% Relative Humidity At 85° C 250 Hours
Gross Leak Test	Mil-std-883, Method 1014, Test Condition C
Fine Leak Test	Mil-std-883, Method 1014, Test Condition A
Terminal Strength	Mil-std-202, Method 211, Test Condition A And C
Moisture Resistance	Moisture Resistance Mil-std 202, Method 106, Omit Step 7b
Solderability	Mil-std-202, Method 208, 95% Coverage
Solvent Resistance	Mil-std-202, Method 2002, Method 215

### DISCLAIMER

NextGen Components, Inc. reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

1/14/2023