


Supplementary Fuseblocks

Type M, For 1³/₃₂" × 1¹/₂" Fuses


600 Volt AC, 1/10 to 30 Amps

BM Series

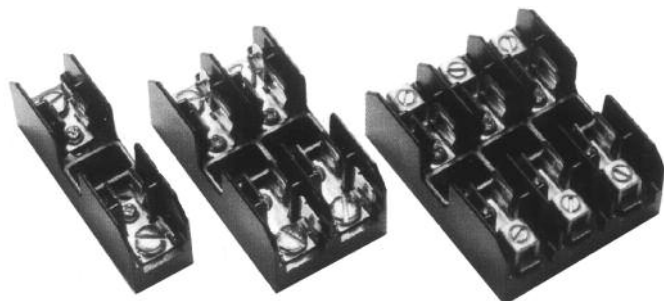


Dimensional Data All dimensions (±0.015)


1 POLE

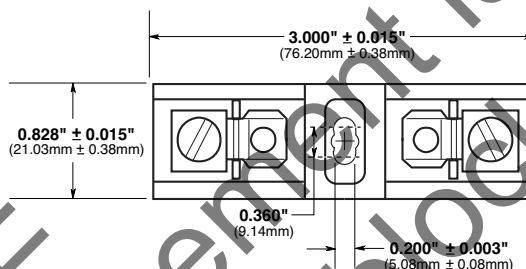


2 POLE

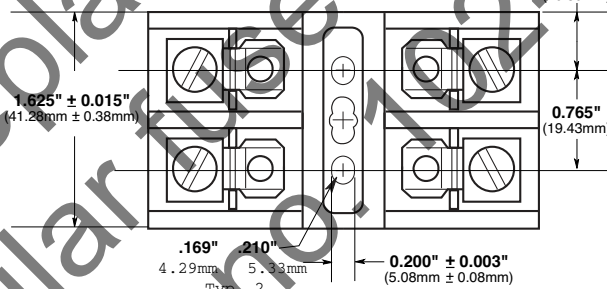

3 POLE

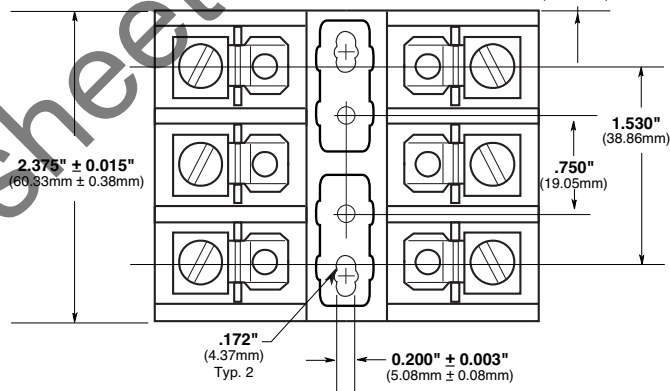

FUSEBLOCK LABEL (EXAMPLE SHOWN)

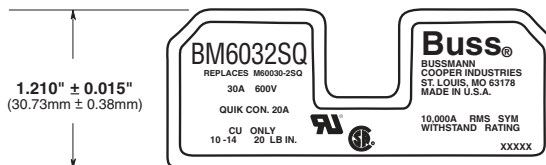

Catalog Symbol: BM Series

Type M Supplementary Fuseblocks

Ampere Rating: 1/10 to 30 Amperes

Voltage Rating: 600 Volts AC

Withstand Rating: 10,000 A RMS Sym. or interrupting rating of the fuse used, whichever is lower.

Agency Information:

U.L. Recognized, U.L. 512, Guide IZLT2, File E14853

CSA Certified, C22.2 No. 39, Class 6225-01, File 47235

For use with any 1³/₃₂" × 1¹/₂" Fuses

(Bussmann KTK, FNQ, FNM, BAF, BAN and AGU)

U.L. Flammability: 94 V0

Material: Thermoplastic

Catalog Data (600V)

Amps	Poles	Terminal Type			Fig. No.
		Screw with Quick Connect*	Pressure Plate w/ Quick Connect*	Box Lug	
1/10 to 30	1	BM6031SQ	BM6031PQ	BM6031B	1
	2	BM6032SQ	BM6032PQ	BM6032B	2
	3	BM6033SQ	BM6033PQ	BM6033B	3

Wire Range
CU Only

#10-#18

#10-#18

#6-#14

* QUICK CONNECT RATED FOR 20A MAXIMUM.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.