
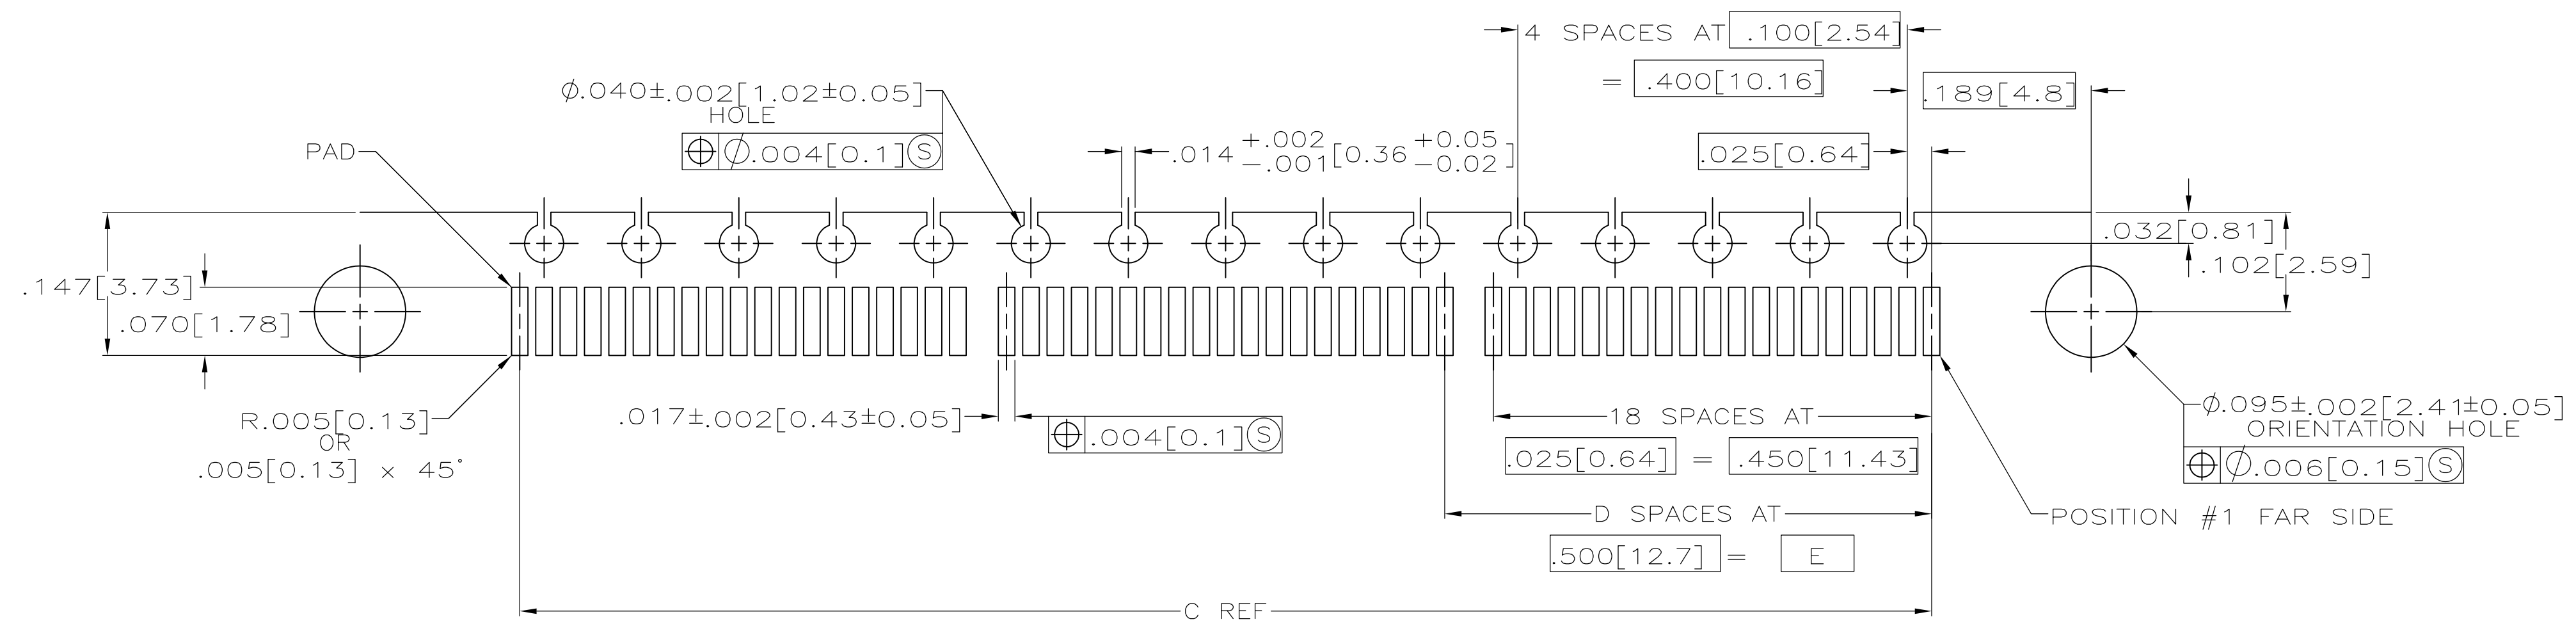
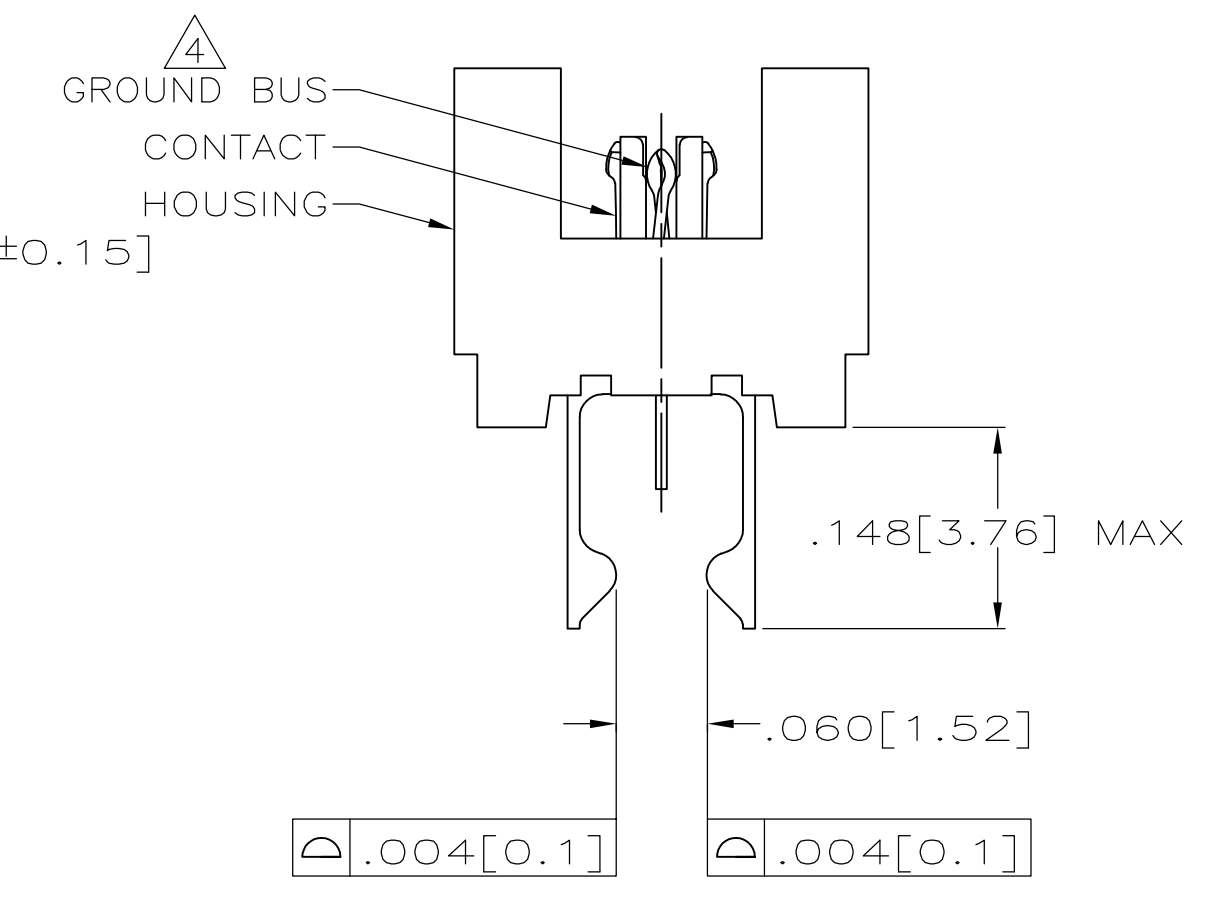


- 1 HOUSING: LIQUID CRYSTAL POLYMER, COLOR BLACK.
CONTACTS: HIGH RELIABILITY COPPER ALLOY.
GROUND BUSES: PHOSPHOR BRONZE ALLOY, UNS C51100.
- 2 CONTACTS & GROUND BUSES: NICKEL UNDERPLATE ALL OVER, MATING SURFACE PLATED TO MEET LEVEL 2 PERFORMANCE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-1422, SOLDER TAILS PLATED TIN-LEAD.
- 3 DATE CODE MARKED IN AREA INDICATED ON SIDE OPPOSITE POSITION #1.
- 4 ONE GROUND BUS WITH 5 TAILS PER EACH MODULE.
- 5 TOLERANCE NON-ACCUMULATIVE.

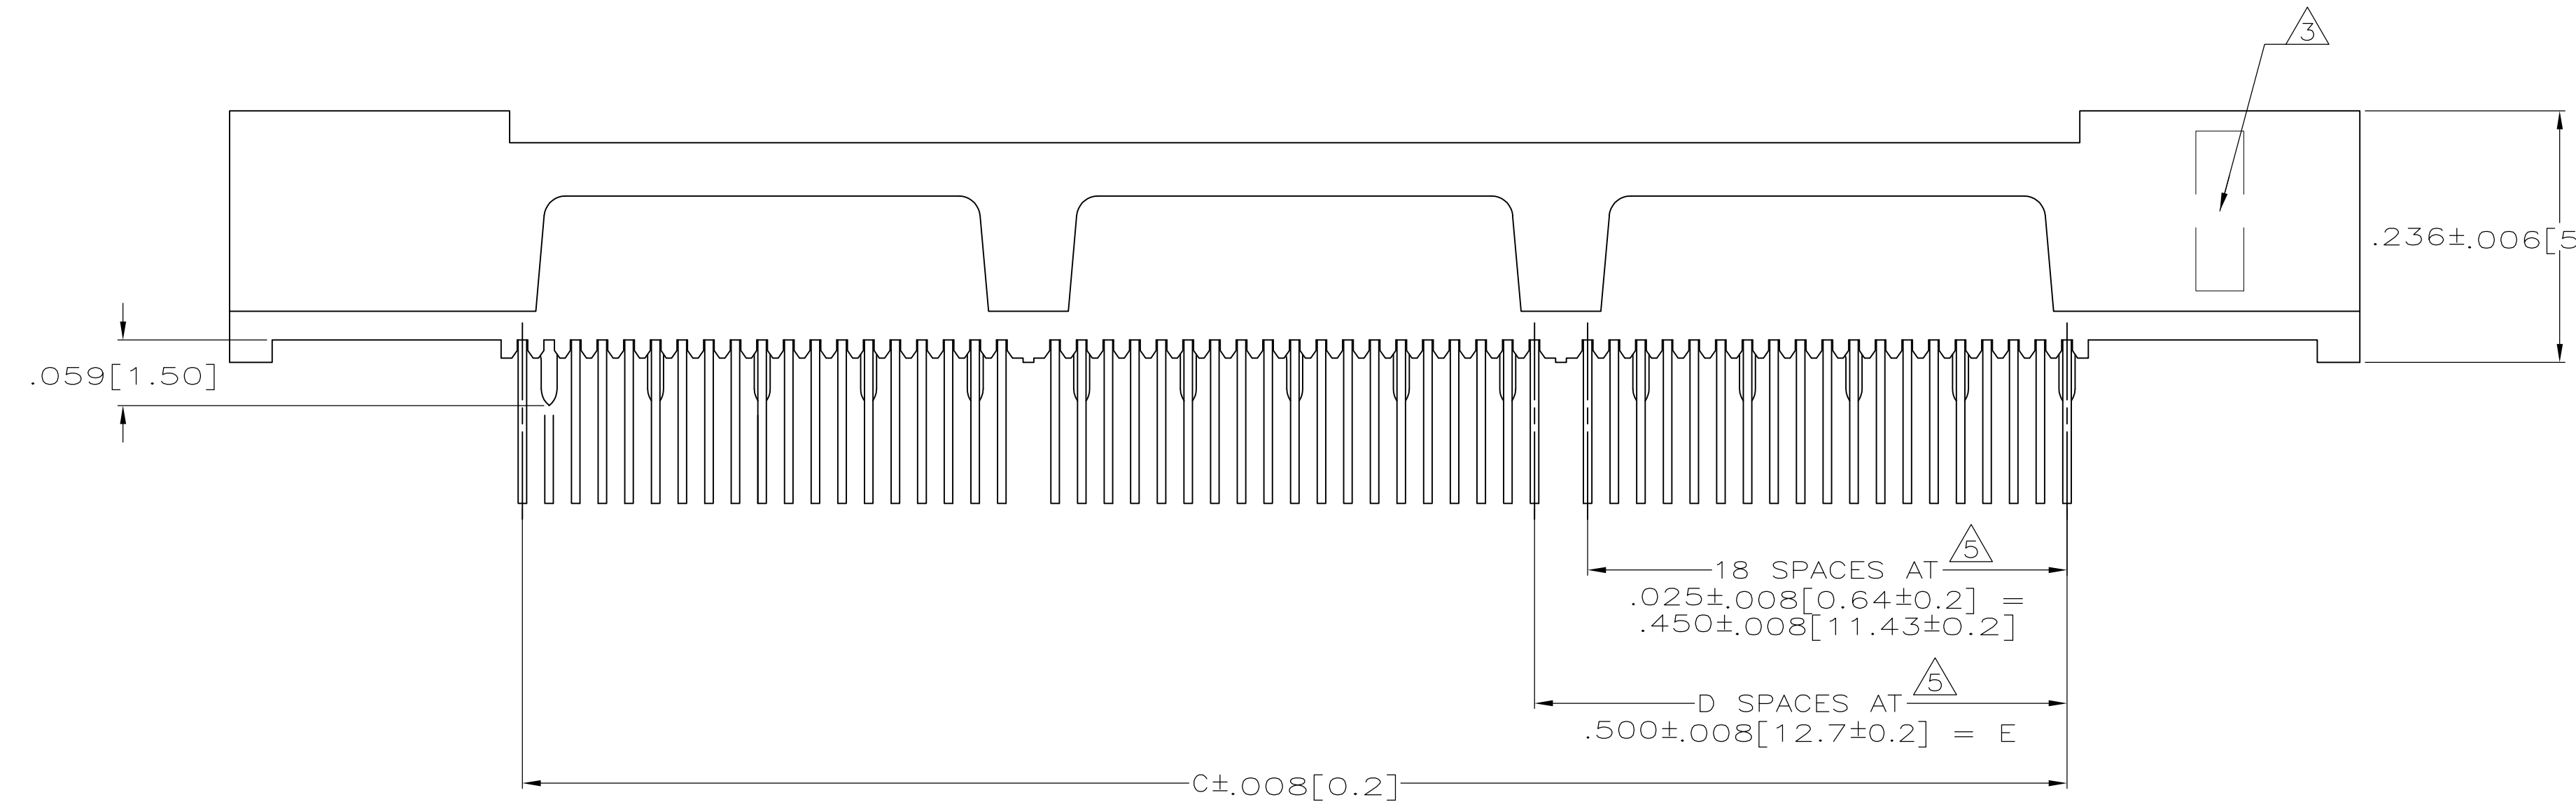

RECOMMENDED PC BOARD LAYOUT
 (MIRROR IMAGE ON OPPOSITE SIDE)

| | | | | | | | | | |
|--------------------|----------------|----------|--------------|---|---------------|---------------|---------------|-----------|-------------|
| OBSOLETE | $.062 [1.57]$ | EXTENDED | 3.000 [76.2] | 6 | 3.450 [87.63] | 3.900 [99.06] | 4.000 [101.6] | 266 | 767044-7 |
| | $.062 [1.57]$ | EXTENDED | 2.500 [63.5] | 5 | 2.950 [74.93] | 3.400 [86.36] | 3.500 [88.9] | 228 | 767044-6 |
| OBSOLETE | $.062 [1.57]$ | EXTENDED | 2.000 [50.8] | 4 | 2.450 [62.23] | 2.900 [73.66] | 3.000 [76.2] | 190 | 767044-5 |
| | $.062 [1.57]$ | EXTENDED | 1.500 [38.1] | 3 | 1.950 [49.53] | 2.400 [60.96] | 2.500 [63.5] | 152 | 767044-4 |
| OBSOLETE | $.062 [1.57]$ | EXTENDED | 1.000 [25.4] | 2 | 1.450 [36.83] | 1.900 [48.26] | 2.000 [50.8] | 114 | 767044-3 |
| | $.062 [1.57]$ | EXTENDED | .500 [12.7] | 1 | .950 [24.13] | 1.400 [35.56] | 1.500 [38.1] | 76 | 767044-2 |
| | $.062 [1.57]$ | EXTENDED | .000 [0] | 0 | .450 [11.43] | .900 [22.86] | 1.000 [25.4] | 38 | 767044-1 |
| PC BOARD THICKNESS | BUS LEADS TYPE | | E | D | C | B | A | NO OF POS | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: J GERACE 18NOV97
 CHK: S STRICKLER 18NOV97
 APVD: A MONK 18NOV97

Tyco Electronics
 Harrisburg, PA 17105-3608

NAME: RECEPTACLE ASSEMBLY, RIGHT
 PRODUCT SPEC: 108-1422
 APPLICATION SPEC: 114-13088

SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: 767044

CUSTOMER DRAWING

SCALE: 8:1 SHEET 1 OF 1 REV T