


DWG NO 608702

UNIT OF MEASURE	A	B	C	D	E	LENGTH OVERALL	MAX BUNDLE DIA.	MIN. TENSILE STRENGTH	
INCHES	.284	.288	.185	.235	.046	7.98	1.75	50 lbs.	
MM	7.21	7.32	4.70	5.97	1.17	203.	44.45	22.68 kg.	
UNIT OF MEASURE	F	G	H	J	L	W	APC ENGINEERING JUL 13 1990 ISSUED BY <i>Acu</i>		
INCHES	7.684	.502	1.042	.033	.966	.435			
MM	195.17	12.75	26.47	.84	24.54	11.05			

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

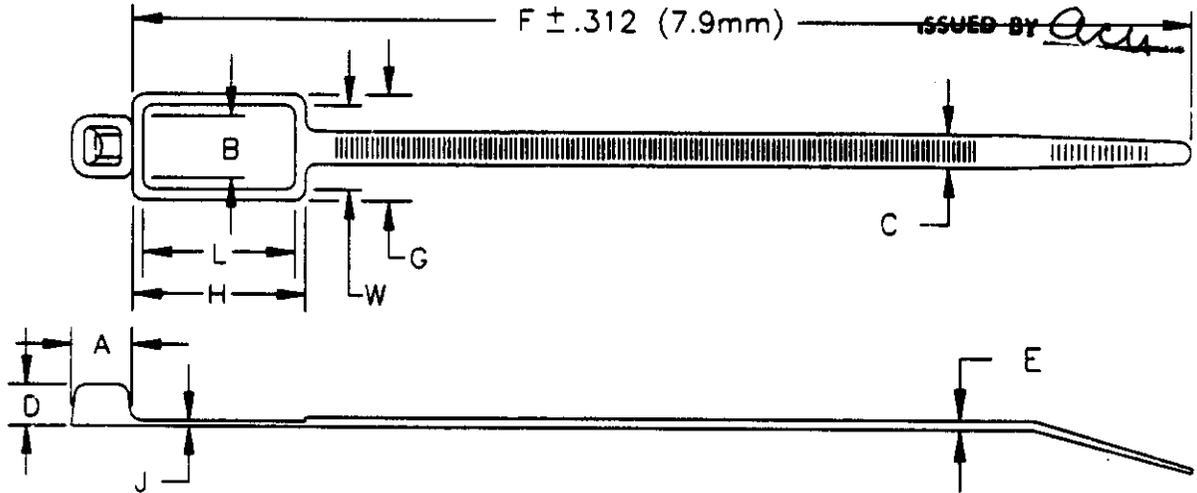

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.
3. MILITARY NO. MS3368-1-A

CUSTOMER DRAWING UNPUBLISHED

OBSOLETE	2-608702-9	NATURAL 1000 ITY134M
	1-608702-9	NATUARL 100 ITY134C

LOC D	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
DIST 1	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)			
QTY. REQ'D. PER ASSY.		PARTS LIST		

MATERIAL NYLON 6/6		HEAT TREAT		FINISH
DIMENSIONS ARE IN INCHES		DRAWN BY: AD-TEK/VL	DATE: 7/3/90	APPROVED BY:
TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PL DEC ± 3 PL DEC ± .039 4 PL DEC ±		CHECK BY: BJM 7/90	RELEASE: J. Hames 7/5/90	
ANGLES ±		TE TE Connectivity		
SURF TEXTURE: ✓		NAME: IDENTIFICATION CABLE TIE 8 INCH		
REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.		SCALE: A	DRAWING No.: 608702	SHEET: 1 OF 1
✓ A	ECO-13-004228	DR	10-JUN-13	REV.: A
P	F	LTR	REVISION RECORD	APP DATE