


AMP | Junior Power Timer TE Internal #: 929505-3 Housing for Male Terminals, Wire-to-Wire, 8 Position, .196 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing



Connector System: Wire-to-Wire

Number of Positions: 8

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 5 mm [.196 in]

Sealable: No

All Timer Connector Housing (586)

Features

Product Type Features

Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	8
Number of Rows	2
Electrical Characteristics	
Nominal Voltage Architecture	24 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	2.8mm

Housing for Male Terminals, Wire-to-Wire, 8 Position, .196 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



Contact Type	Tab
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	30 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PBT
Centerline (Pitch)	5 mm[.196 in]
Dimensions	
Connector Height	26 mm[1.02 in]
Product Width	22.4 mm[.881 in]
Product Length	28.8 mm[1.13 in]
Row-to-Row Spacing	5.6 mm[.22 in]

Usage Conditions

Operating Temperature (Max)	130 °C[266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Quantity	600
Packaging Method	Bag
Other	
Serviceable	No
Connector Position Assurance Capable	No
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 8 Position, .196 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




TE Part # CAT-T4827-CH8172 Timer Connector Housing

Also in the Series | Junior Power Timer

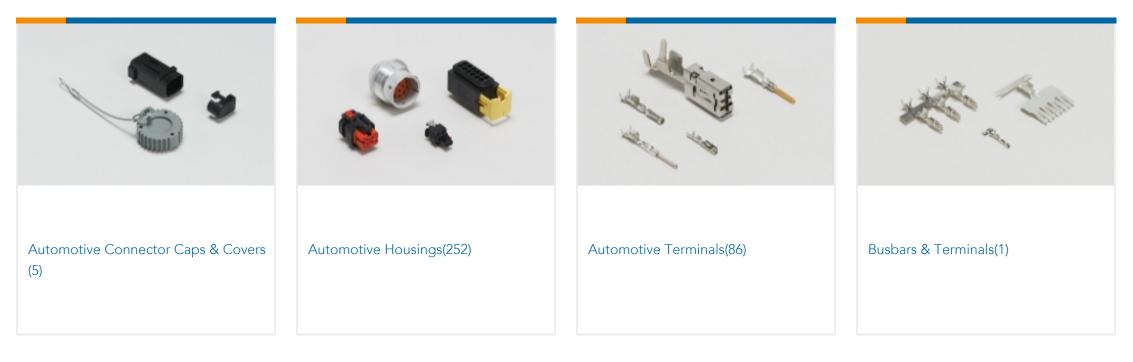

Housing for Male Terminals, Wire-to-Wire, 8 Position, .196 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



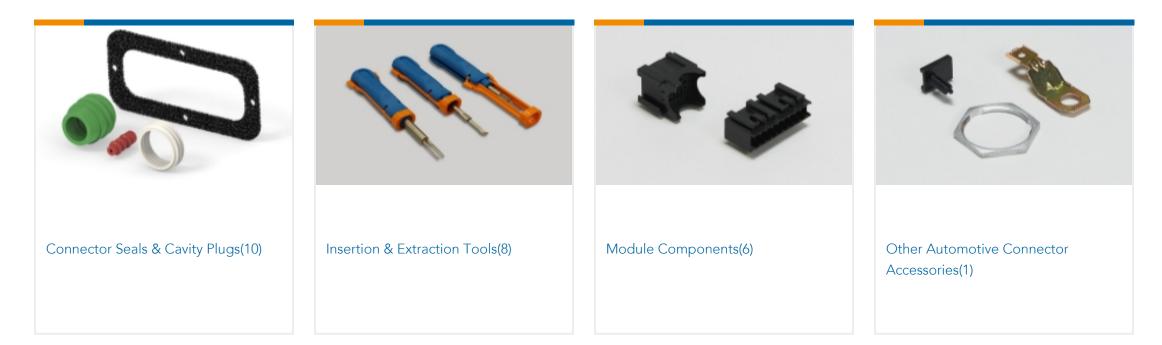



PCB Headers & Receptacles(1)

Customers Also Bought



Timer Connector Housing

FF 110 TAB PTP CUZN30

FF 110 (2.8 X 0.8 MM) TAB PTP CUZN30

Documents

Product Drawings FF FLA-STE-GEH2X4P

German

CAD Files

Customer View Model

ENG_CVM_929505-3_F4.3d_igs.zip

English

Customer View Model

ENG_CVM_929505-3_F4.3d_stp.zip

English

Customer View Model

ENG_CVM_929505-3_F4.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Housing for Male Terminals, Wire-to-Wire, 8 Position, .196 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



Datasheets & Catalog Pages Timer Interconnection System

English