



Electrical specifications

Center Frequency: 415 MHz
Bandwidth: 30 MHz min
VSWR in BW: 1.5:1 min
Input / Output Impedance: 50 Ohms
Passband: 400-430 MHz
Passband Insertion Loss: 2.0 dB max
Passband Ripple: 1.0 dB max
Rejection: 25 dB min at 377 MHz
Rejection 2: 25 dB min at 450 MHz
Power Handling: 1 W

Mechanical


Mounting Method: SMT
Dimensions: 32 x 25 x 13.5 mm

Environmental

Operating Temperature: -40°C to +85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

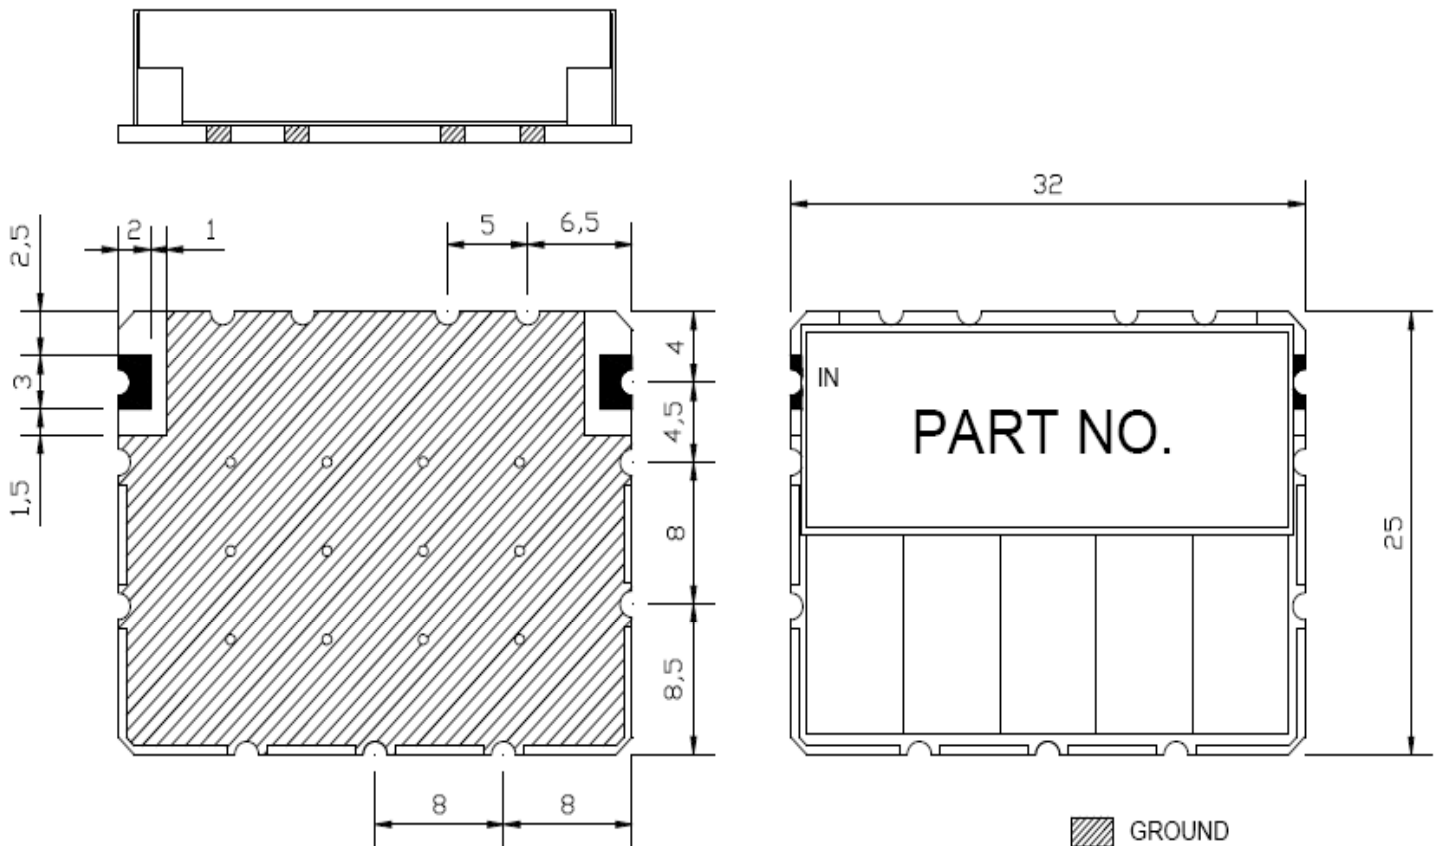

GROUND
 IN/OUT PORT
 UNIT : mm
 Tolerance : +/- 0.3