



1 2 3 4 5 6 7


HDB 15 Male
Plastic: Blue



P1

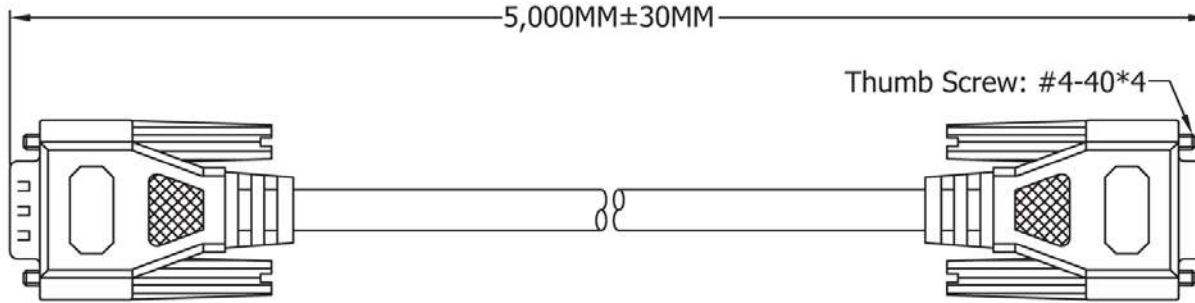


HDB 15 Female
Plastic: Blue



P2

PIN OUT

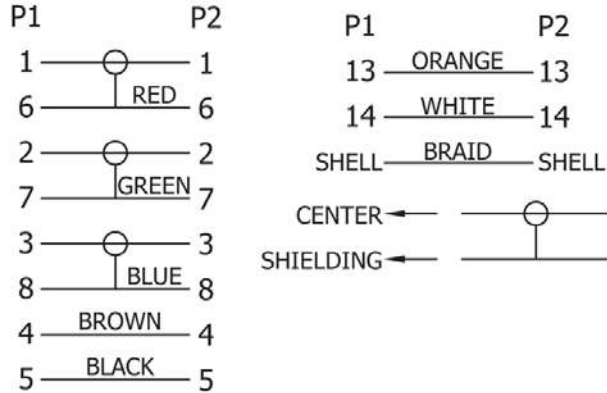

Material:

- CABLE:28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*4C+ INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC COLOR:BEIGE, OD:Ø 8.1± 0.15mm UL-2919
- CONNECTOR:
 - P1:HDB 15P MALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL (9TH PIN UNLOAD)
 - P2:HDB 15P FEMALE,GOLD FLASH CONTACT,NICKEL PLATED SHELL
- SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- ELECTRONIC TEST:
 - <1>.100% OPEN SHORT & MIS WIRE TEST
 - <2>.CONTACT RESISTANCE 3 OHMS MAX
 - <3>.INSULATION RESISTANCE 20 M OHMS MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING (HANKING SIZE MUST BE SMALLER THAN PACKING) PACKING TYPE: DB VP4.



Scale	1:1					Name	Item No. AK3740-5
TOLERANCE				Drawn	11.15.11	Chappell	
X.X	±0.40			Approved			Title Premium VGA Monitor extension cable - HD D-Sub 15-pin Male <=> Female, 5 Meters
X.XX	±0.25						Drawing No.
X.XXX	±0.15						rev00
Angle	±3°						
							Replace
							Sheet



1 2 3 4 5 6 7