

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 8-position, Socket straight M12, coding: A, connected with unwired, on Socket straight M12, coding: A, cable length: 5 m

## Your advantages

- Easy and safe: 100% electrically tested plug-in components

## Commercial data

Item number	1205107
Packing unit	1 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Product key	BF1CFA
GTIN	4063151272319
Weight per piece (including packing)	247.7 g
Weight per piece (excluding packing)	247.7 g
Customs tariff number	85444290
Country of origin	PL

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## Technical data

### Product properties

Product type	Sensor/actuator cable
Number of positions	8
Application	Standard
No. of cable outlets	1
Coding	A

### Insulation characteristics

Overvoltage category	II
Degree of pollution	3

### Material specifications

Flammability rating according to UL 94	HB
--	----

### Electrical properties

Nominal voltage $U_N$	30 V AC
	30 V DC
Nominal current $I_N$	2 A
Protective circuit	unwired

### Signaling

Status display	No
Status display present	No

### Connector

#### Connection 1

Type	Socket straight M12
Number of positions	8
Coding type	A
Number of positions	8

#### Connection 2

Type	Socket straight M12
Number of positions	8
Coding type	A
Number of positions	8

### Cable/line


Cable length	5 m
--------------	-----

PUR halogen-free black [PUR]

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable

1205107

<https://www.phoenixcontact.com/pc/products/1205107>

Dimensional drawing	
Cable weight	46 kg/km
UL AWM Style	20549 / 10493 (80°C/300 V)
Number of positions	8
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	32x 0.10 mm
AWG signal line	24
Conductor cross section	8x 0.25 mm <sup>2</sup> (Signal line)
Wire diameter incl. insulation	1.17 mm ±0.02 mm
External cable diameter	5.9 mm ±0.15 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material, filler	PE
Material wire insulation	PP
Single wire, color	white, brown, green, yellow, gray, pink, blue, red
Thickness, insulation	≥ 0.21 mm
Thickness, outer sheath	approx. 0.8 mm
Overall twist	8 wires around filler to the core
Max. conductor resistance	≤ 78 Ω/km
Insulation resistance	≥ 1 GΩ*km
Wave impedance	100 Ω +15 % (with 1 MHz)
Cable capacity	≤ 70 pF/m
Nominal voltage, cable	≤ 300 V
Test voltage	≥ 3000 V
Minimum bending radius, fixed installation	8 x D
Minimum bending radius, flexible installation	10 x D
Max. bending cycles	4000000
Halogen-free	in accordance with DIN VDE 0472 part 815
Flame resistance	in accordance with UL 758/1581 FT2 According to DIN EN 60332-2-2 (20 s)
Resistance to oil	in accordance with DIN EN 60811-2-1
Other resistance	Highly resistant to acids, alkaline solutions and solvents hydrolysis and microbe resistant partly UV-resistant in accordance with DIN EN ISO 4892-2-A Low adhesion

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

Special properties	abrasion-resistant
	Flexible cable conduit capable
	Silicone-free
	Free of substances which would hinder coating with paint or varnish
Ambient temperature (operation)	flexible
	-40 °C ... 80 °C (cable, fixed installation)
	-25 °C ... 80 °C (Cable, flexible installation)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP68

## Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101


# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable

1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## Drawings

Dimensional drawing

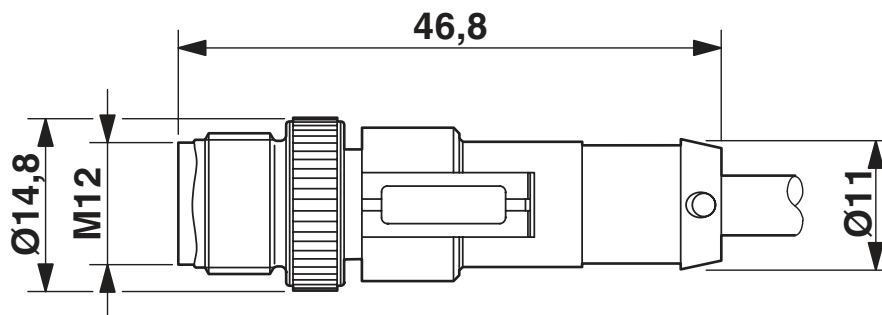

Plug, M12 x 1, straight, shielded

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable





1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1205107>

 <b>UL Listed</b> Approval ID: FILE E 221474				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	2 A	-	-

 <b>cUL Listed</b> Approval ID: FILE E 221474				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	2 A	-	-

<b>cULus Listed</b>				
---------------------	--	--	--	--

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## Classifications

### ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

### ETIM

ETIM 8.0	EC001855
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values



# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## Accessories

### PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/pc/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



---

### SAC-M12-EXCLIP-M - Locking clip

1558988

<https://www.phoenixcontact.com/pc/products/1558988>

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable

1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## PABA WH/23 - Insert label

1013779

<https://www.phoenixcontact.com/pc/products/1013779>



Insert label, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

---

## PABA YE/23 - Insert label

1013782

<https://www.phoenixcontact.com/pc/products/1013782>



Insert label, Strip, yellow, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 20

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/pc/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/pc/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## SAC-M12-EXCLIP-F - Locking clip

1558991

<https://www.phoenixcontact.com/pc/products/1558991>



Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools

---

## TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/pc/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/pc/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

---

## TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/pc/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

# SAC-8P-M12FS/ 5,0-PUR/M12FS - Sensor/actuator cable



1205107

<https://www.phoenixcontact.com/pc/products/1205107>

## SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/pc/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)