


Core **E20/10/5**

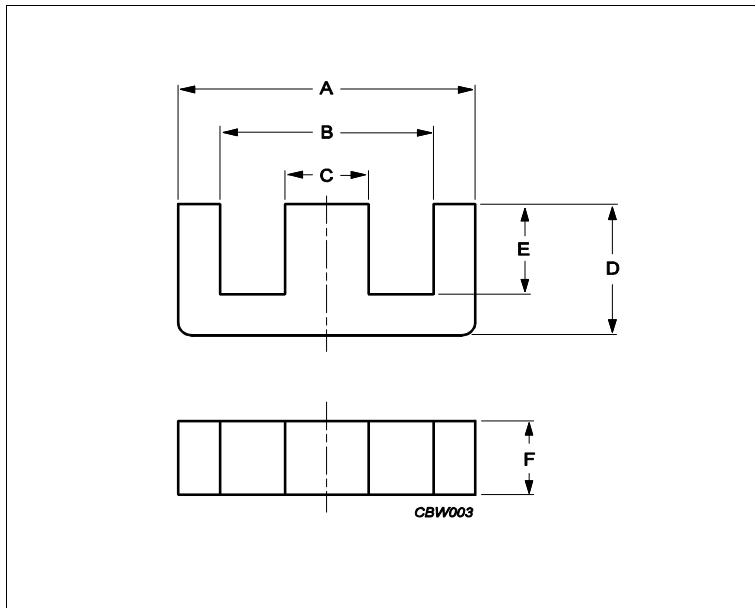

Effective parameters			
	Parameter	Value	Unit
$\Sigma(I/A)$	core factor (C1)	1.37	mm ⁻¹
Ve	effective volume	1340	mm ³
Le	effective length	42.8	mm
Ae	effective area	31.2	mm ²
Amin	minimum area	25.2	mm ²
m	E20/10/5	≈ 4	g/pcs

Dimensions for product: E20/10/5						
	Nom	Tol +	Tol -	Max	Min	Unit
A	20.70	0.00	1.10	20.70	19.60	mm
B	12.80	0.80	0.00	13.60	12.80	mm
C	5.20	0.00	0.40	5.20	4.80	mm
D	10.00	0.20	0.20	10.20	9.80	mm
E	6.30	0.40	0.00	6.70	6.30	mm
F	5.30	0.00	0.40	5.30	4.90	mm

Inductance factor					
Material	Value	Tol +	Tol -	Unit	
3C92	1170	25%	25%	nH/turns ²	
3C94	1500	25%	25%	nH/turns ²	
3C96	1400	25%	25%	nH/turns ²	
3F36	1000	25%	25%	nH/turns ²	

Power loss: 3C92				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	0.670	W/set
Power loss: 3C94				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	0.670	W/set
Power loss: 3C96				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	0.600	W/set
400 kHz	50 mT	100 °C	0.240	W/set

Core **E20/10/5**

Power loss: 3F36

Measuring conditions			Max	Unit
500 kHz	50 mT	100 °C	0.200	W/set
500 kHz	100 mT	100 °C	1.500	W/set

Bsat

Measuring conditions			Material	Min	Unit
25 kHz	250 A/m	100 °C	3C92	370	mT
25 kHz	250 A/m	100 °C	3C94	320	mT
25 kHz	250 A/m	100 °C	3C96	340	mT
25 kHz	250 A/m	100 °C	3F36	340	mT

Accessories

Ordering name	Description	Ordering code
CLA-E20/10/5	Clasp	432202120162
CPV-E20/10/5-1S-6P	Coil former, termoplastic, vertical	432202120292
CSH-E20/10/5-1S-8P-C	Coil former, termoset, horizontal	432202107331
CSH-E20/10/5-1S-8P-IZ	Coil former, termoset, horizontal	432202106831
SPR-E20/10/5	Spring	432202120222