



Wireless Technology to Control and Monitor Anything from Anywhere™



# SNAP CONNECT E10

*Embedded SNAP Connect Appliance*

The **SNAP® Connect E10** is a rugged, powerful, embedded connectivity appliance built to interface directly with SNAP mesh networks. The E10 can collect data from SNAP devices for centralized storage, database processing or application monitoring, making it extremely easy to view or control devices over the Internet. The E10 bridges SNAP networks across TCP/IP.

The flexibility of an open, Linux-based design provides a wide range of **supported connectivity options**, such as flash drives, using the built-in Ethernet and USB 2.0 host ports.

*Full Linux services are also available to administrators and natively hosted applications.*

## Benefits at a Glance:

- Control & monitor SNAP networks remotely
- Supports LAN & WAN remote administration using Synapse Portal (Free Download)
- Includes SNAP Connect Software & License
- Linux OS Services fully accessible
- 32-bit, RISC architecture, CPU running at 400MHz
- 256 MB Flash, expandable through external USB drives
- 64 MB RAM
- RP-SMA external antenna
- Synapse RF Engine, 2.4GHz, IEEE 802.15.4
- 10/100 Mb Ethernet port & USB 2.0 port
- 5% to 95% relative humidity, non condensing
- -40°C to +85°C standard (operating), -55°C to +125°C (Storage)

## Part Numbers:

<b>SLE10-001</b>	2.4 GHz operation
<b>SLE10M-001</b>	2.4 GHz operation with international transmit power levels and up to 2Mbps radio rate
<b>SLE10-868-001</b>	868 MHz operation
<b>SLE10-900-001</b>	900MHz operation






Wireless Technology to Control and Monitor Anything from Anywhere™

# SNAP CONNECT E10

*Embedded SNAP Connect Appliance*

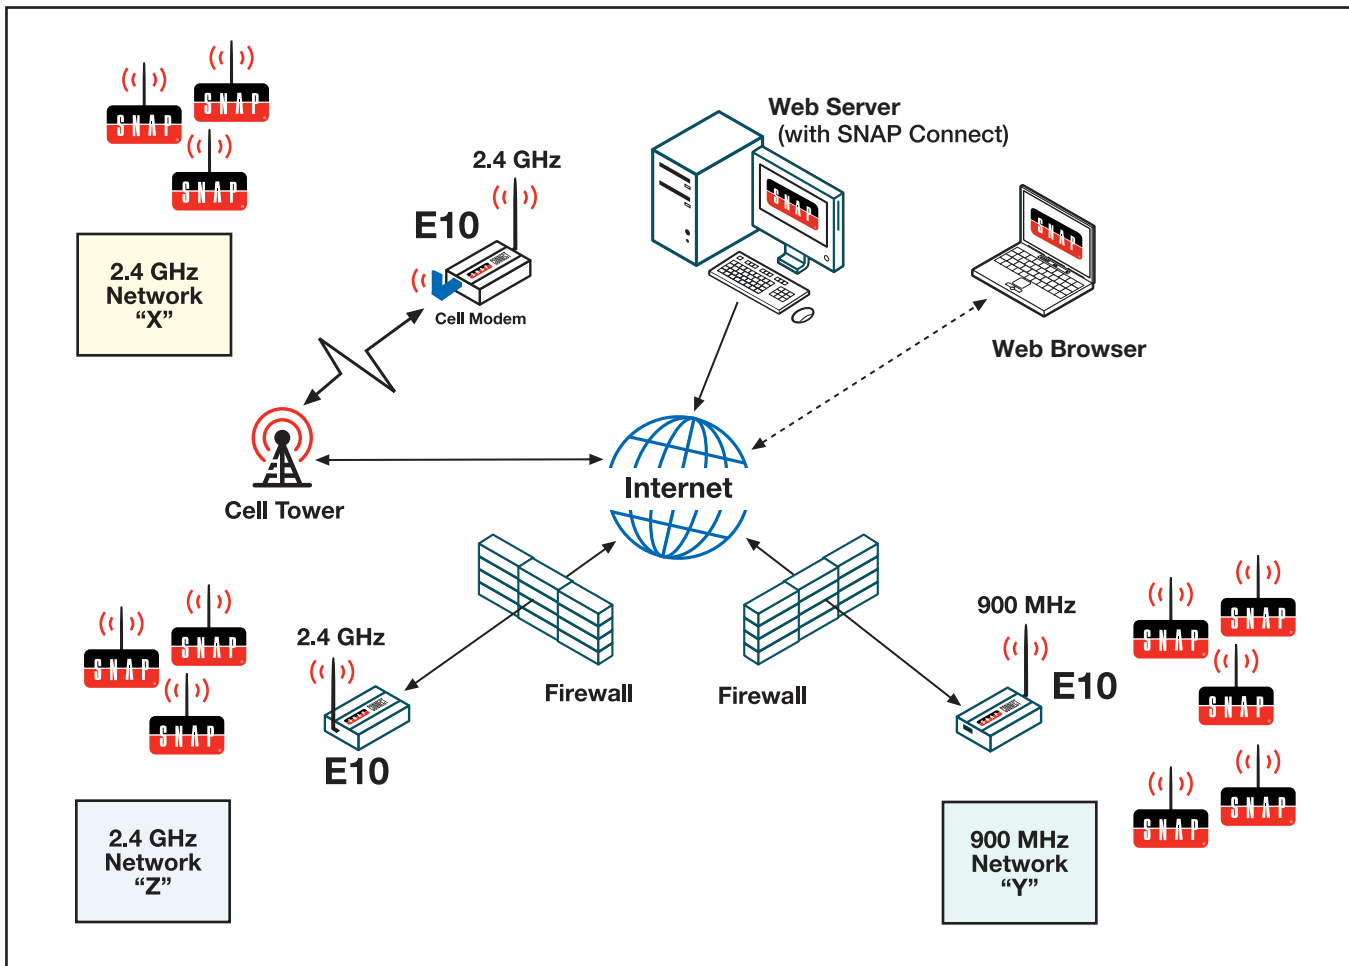

## SNAP® Connect E10 Appliance

Connects SNAP networks to the Internet using built-in Ethernet or USB Cell modem or Wi-Fi adapter. Shown here, the web browser can monitor and control three remote SNAP networks in real time.

## Part Numbers:

<b>SLE10-001</b>	2.4 GHz operation
<b>SLE10M-001</b>	2.4 GHz operation with international transmit power levels and up to 2Mbps radio rate
<b>SLE10-868-001</b>	868 MHz operation
<b>SLE10-900-001</b>	900MHz operation

## SYNAPSE Wireless, Inc.

500 Discovery Drive · Huntsville, Alabama 35806  
877-982-7888 · synapse-wireless.com

All specifications are subject to change without notice. © 2013 SYNAPSE® All Rights reserved. Patents pending.

430155-01A