


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 125 LBS [ 556 NEWTONS ]  
WHEN TESTED ON A 1.5" MANDREL
3. BRACKETS [ ] DENOTES DIMENSIONS IN MILLIMETERS
4. TOLERANCES:  
.XXX = ±.010 [ .25 ] .XX = ±.02 [ .5 ]  
.X = ±.03 [ .8 ] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L=±.3 [ 7 ]
IMLT25S-C	1" [ 25 ]	100	5.0" [ 127 ]
IMLT51S-C	2" [ 51 ]	100	7.9" [ 201 ]
IMLT69S-C	2.7" [ 69 ]	100	10.2" [ 259 ]
IMLT102S-C	4" [ 102 ]	100	14.3" [ 362 ]
IMLT152S-C	6" [ 152 ]	100	20.5" [ 521 ]
IMLT203S-C	8" [ 203 ]	100	26.8" [ 679 ]
IMLT254S-C	10" [ 254 ]	100	33.0" [ 838 ]
IMLT304S-Q	12" [ 304 ]	25	39.3" [ 998 ]
IMLT355S-Q	14" [ 355 ]	25	45.5" [ 1156 ]
IMLT380S-Q	15" [ 380 ]	25	49.2" [ 1250 ]

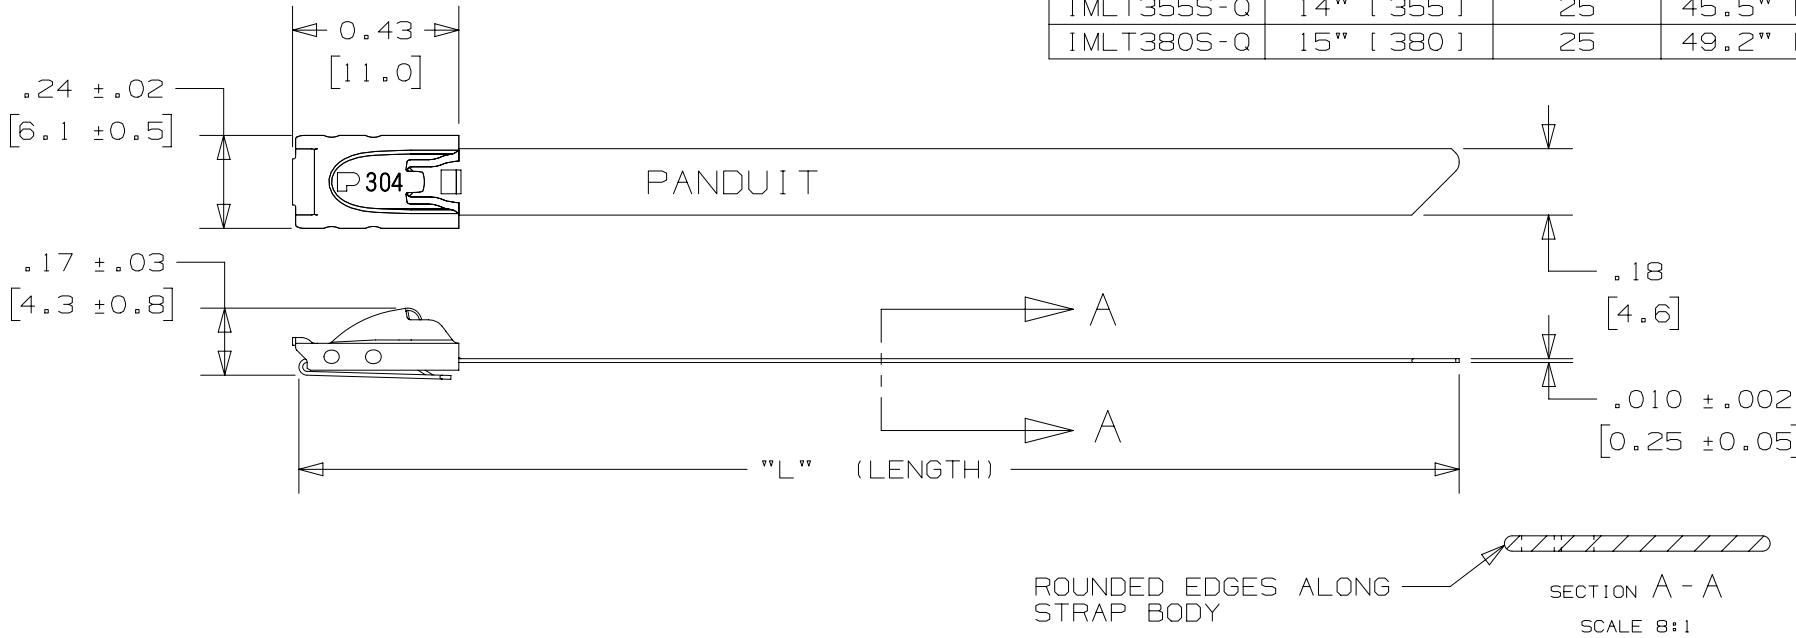

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	1/16	JSUN	JSUN	RGRO	REMOVE A NOTE	LPECN_15L355BB_DC/01
00	1/16	JSUN	JSUN	RGRO	INITIAL RELEASE	LPECN_15L355BB_DC/00

TITLE <b>IMLT STANDARD SINGLE LOOP ASSEMBLY 304 STAINLESS STEEL</b> CUSTOMER DRAWING			
ITEM REVISION NAME <b>15L355BB/01</b>		<b>PANDUIT</b>	
DATASET FILE NAME <b>15L355BB_DC/01</b>			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]			
.X ± .XX ±		.XXX ± ANGLES ±	
DRAWN BY JSUN		DATE 1/16	
CHK JSUN		SCALE 2:1	
DRAWING NUMBER: <b>15L355BB_DC</b>		<b>SHT 1 OF 1</b>	
REV		SIZE A	