


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/30/00	-	INITIAL RELEASE
NC	04/30/08	100012	UPDATE DRAWING FORMAT

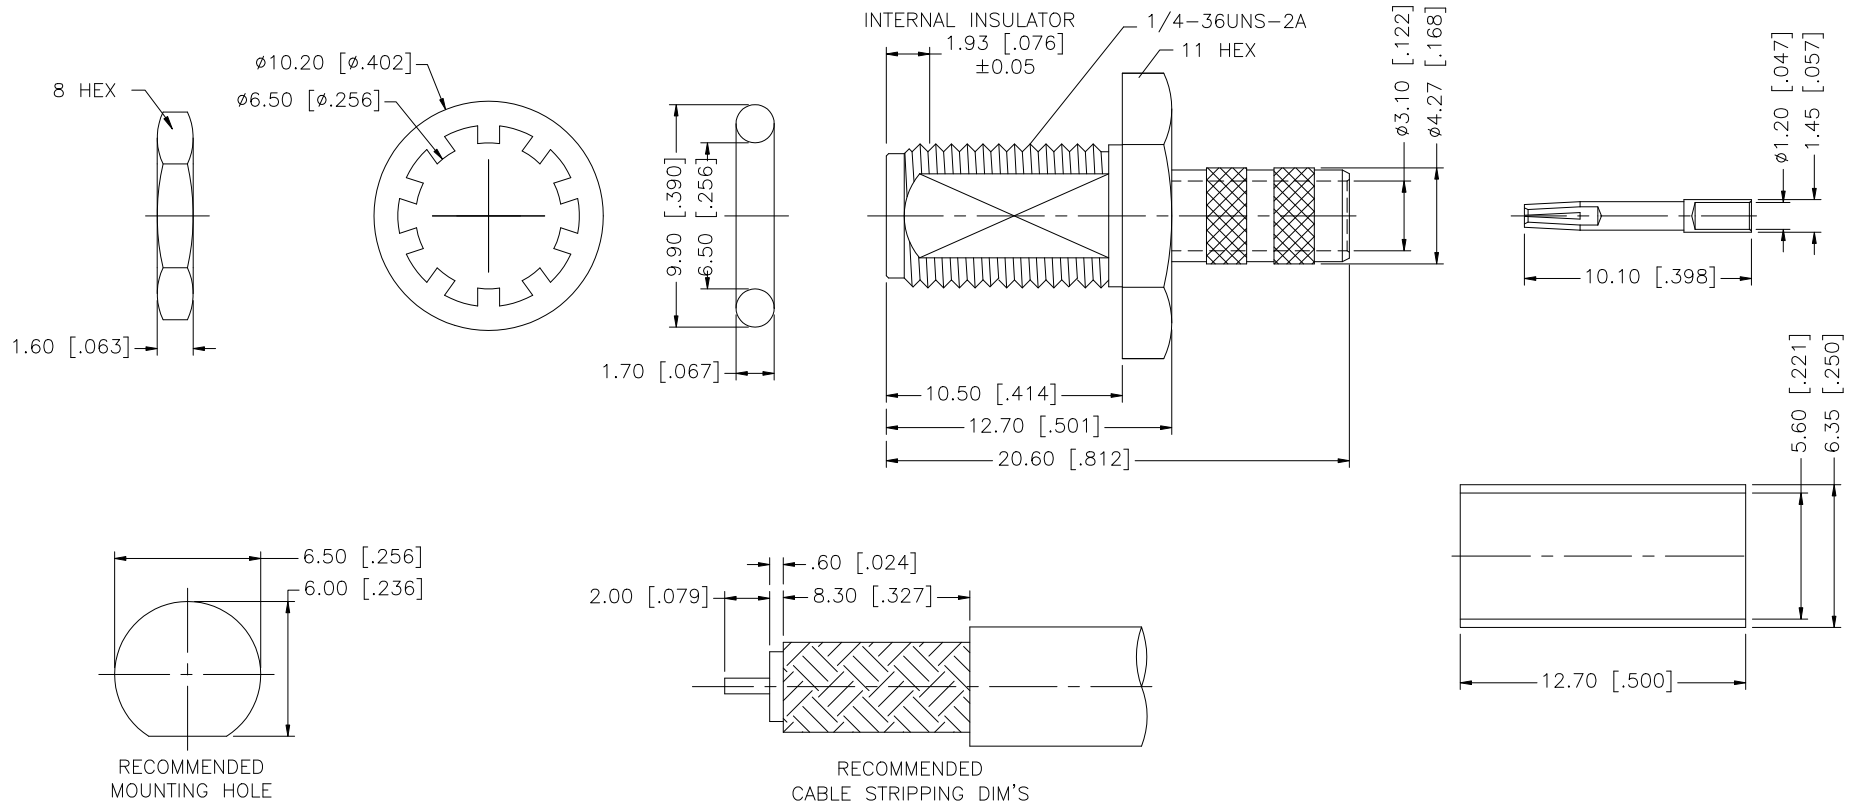

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	APPROVALS	DATE	PART DESCRIPTION								
8							<p>Amphenol Connex</p> <p>SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-142/U, 223/U, 400/U CABLE)</p> <p>PART NO. 132281</p>								
7	FERRULE	COPPER	GOLD	1	DRAWN	GRS					04/30/08				
6	HEX NUT	BRASS	GOLD	1	CHECKED										
5	LOCK WASHER	BRASS	GOLD	1	ISSUED										
4	GASKET	SILICONE	RED	1	SHEET	1 OF 1									
3	CONTACT PIN	BER. COPPER	GOLD	1	CAD FILE		C:/132/132281.DWG	DWG. NO.	132281.DWG	REV.	A	SIZE	A	SCALE	NA
2	INSULATOR	PTFE	NATURAL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.										
1	BODY	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm										
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"										