




01 SERIES
LOW PROFILE
LOW INSERTION

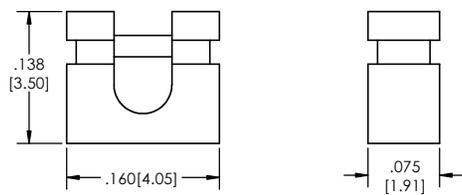

03 SERIES
HIGH PROFILE
LOW INSERTION
HANDLE OPTION

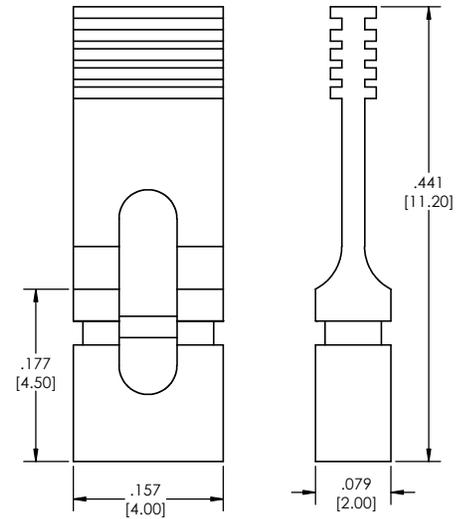

02 SERIES
HIGH PROFILE
LOW INSERTION

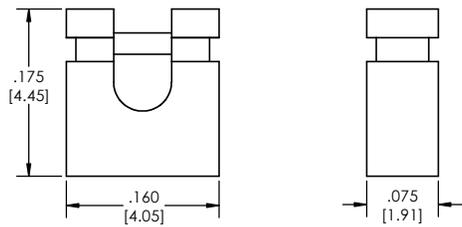

SH-2 - -
(A) (B) (C)

- A. Plating Options
- See Plating Options below
- B. Shunt Style
- See Shunt Style box below
- C. Lead Free

Plating options	
G	-10µ Gold on Contact Area/ Flash on Tail
F	- Gold Flash over Entire Pin
T	- Matte Tin all Over

Shunt Style	
01	01 Series Low Profile, Low Insertion
02	02 Series High Profile, Low Insertion
03	03 Series High Profile, High Insertion, Handle Option

Specifications:
 Current Rating: 3.0 Ampere
 Insulation Resistance: 1000M Ohms Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20M Ohms Max.
 Operation Temperature: -40°C to +105°C
 Max. Process Temperature
 Peak: 260°C up to 10 secs.
 Process: 230°C up to 60 secs.
 Wave: 260°C up to 6 secs.
 Manual Solder: 350°C up to 5 secs.

Materials:
 Contact Material: Phosphor Bronze
 Insulator Material: Nylon 6T

Products cut to specific sizes are uncancellable/ nonreturnable.
 Parts are subject to change without notice.



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Major League Electronics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Major League Electronics IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE	
DIMENSIONS ARE IN INCHES		DRAWN	EOW	01/20/15	
TOLERANCES:		CHECKED	GWE	01/20/15	
ONE DECIMALS ±.100		ENG APPR.			
THREE DECIMAL ±.005		MFG APPR.			ADDRESS: 2533 Centennial Blvd. Jeffersonville, IN 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@mlelectronics.com
FOUR DECIMAL ±.002		INTERPRET GEOMETRIC TOLERANCING PER:		TITLE: SH-2 SERIES	
NEXT ASSY	USED ON	MATERIAL		SIZE	DWG. NO.
		FINISH		C	B
APPLICATION	DO NOT SCALE DRAWING	SCALE 16:1		SHEET 1 OF 1	