

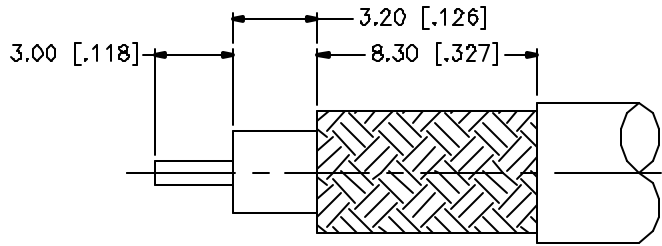
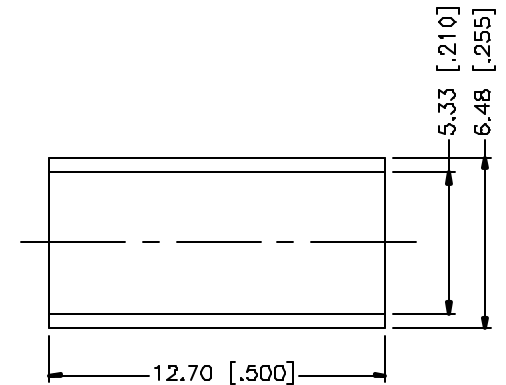


REV.	DATE	DESCRIPTION
NC	04/03/05	INITIAL RELEASE

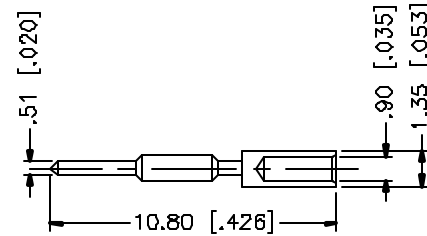

RECOMMENDED
CABLE STRIPPING DIM'S

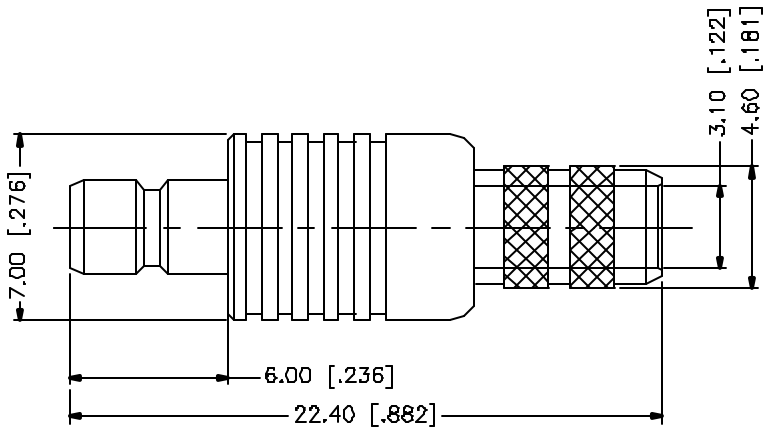

8				
7				
6				
5				
4	FERRULE	COPPER	GOLD	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
 0.5 - 3mm ± 0.20mm
 3 - 30mm ± 0.40mm
 30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
 .020 - .315 = ± 0.007"
 .315 - 1.180 = ± 0.015"
 1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	04/03/05
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/142/142330.DWG	

Amphenol Connex							
				PART DESCRIPTION SMB CRIMP JACK (RG-58/U, 58B/U CABLE)			
PART NO. 142330							
DWG. NO.	14-2330.DWG	REV.	NC	SIZE	A	SCALE	NA