


COIL: 26.5 VDC NOMINAL	
WINDING #1	WINDING #2
1000 OHMS ± 10%	1000 OHMS ± 10%
13V MUST OPERATE	13V MUST OPERATE

**CUSTOMER DATA SHEET**

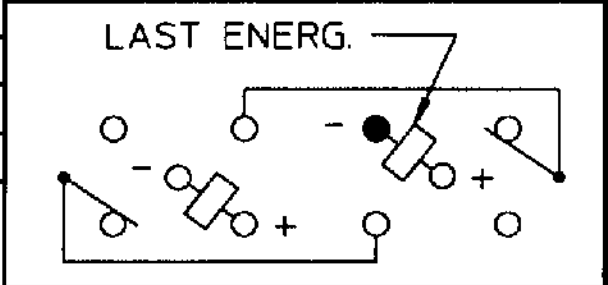

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 50 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

CONTACT RATING: 2 AMPS / 30 VDC

NOTES: LATCH & RESET TIME : 4 MS MAX.  
CONTACT BOUNCE : 2 MS MAX.

DR. R.B. 12/15/92 CK. JAW 12-15-92



CUST. HI-G  
 CUST. NO. 2KL-2A-126 TYPE 'LS' RELAY

**LS-9108**