


NOTES

- MATERIAL
HOUSING : LIQUID CRYSTAL POLYMER UL-94V-0(COLOR : BLACK)
TERMINAL : COPPER ALLOY
FITTING NAIL : COPPER ALLOY
 - PLATING
TERMINAL: CONTACT AREA: SEPARATED GOLD PLATING (0.1 MICROMETER MINIMUM).
SOLDER TAIL AREA: SEPARATED GOLD PLATING.
UNDER PLATING : NICKEL OVERALL.
*DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.
FITTING NAIL: CONTACT AREA: SEPARATED GOLD PLATING (0.1 MICROMETER MINIMUM).
SOLDER TAIL AREA: SEPARATED GOLD PLATING.
UNDER PLATING : NICKEL OVERALL.
*DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.
*EVEN THOUGH GOLD PLATING ON THE TOP SURFACE OF NAIL MIGHT BE THIN, NO FUNCTIONAL PROBLEM.
- $\triangle 3$ APPLY FOR (CIRCUIT/2)=EVEN
- MATE WITH : 2068060**2
 - TAIL AND FITTING NAIL COPLANARITY TO BE 0.08MAXIMUM.



1.91	0.70	2.48	2068070062	○	---	6
C	B	A	EMBOSSED TAPE PACKAGE	HIGH VOL. TOOL	LOW VOL. TOOL	CIRCUIT
			ORDER No.	SAMPLE PREPARATION ○:TOOLED \triangle :WORK IN PROCESS ---:TOOLING TO BE CONFIRMED		
			CONNECTOR SERIES No. : 2068071**1			

SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: RELEASED		molex	
$\nabla = 0$	mm	SCALE	10:1	EC NO: 618378			
$\nabla = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRWN: TNISHIDA02		2019/05/23	PRODUCT CUSTOMER DRAWING	
$\nabla = 0$	ANGULAR TOL	$\pm 3.0^\circ$	CHK'D: KTANAKA03		2019/06/03	DOCUMENT NUMBER	
$\nabla = 0$	4 PLACES	± 0.03	APPR: RTAKEUCHI		2019/06/03	2068071000-SD	
$\nabla = 0$	3 PLACES	± 0.03	INITIAL REVISION:		DOC TYPE		PSD
$\nabla = 0$	2 PLACES	± 0.05	DRWN: TTANIGUCHI01		2018/11/01	DOC PART	
$\nabla = 0$	1 PLACE	± 0.1	APPR: RTAKEUCHI		2019/06/03	REVISION	
$\nabla = 0$	0 PLACES	± 0.2	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SERIES		A
$\nabla = 0$	THIRD ANGLE PROJECTION		DRAWING	A3-SIZE	SHEET NUMBER	1 OF 2	

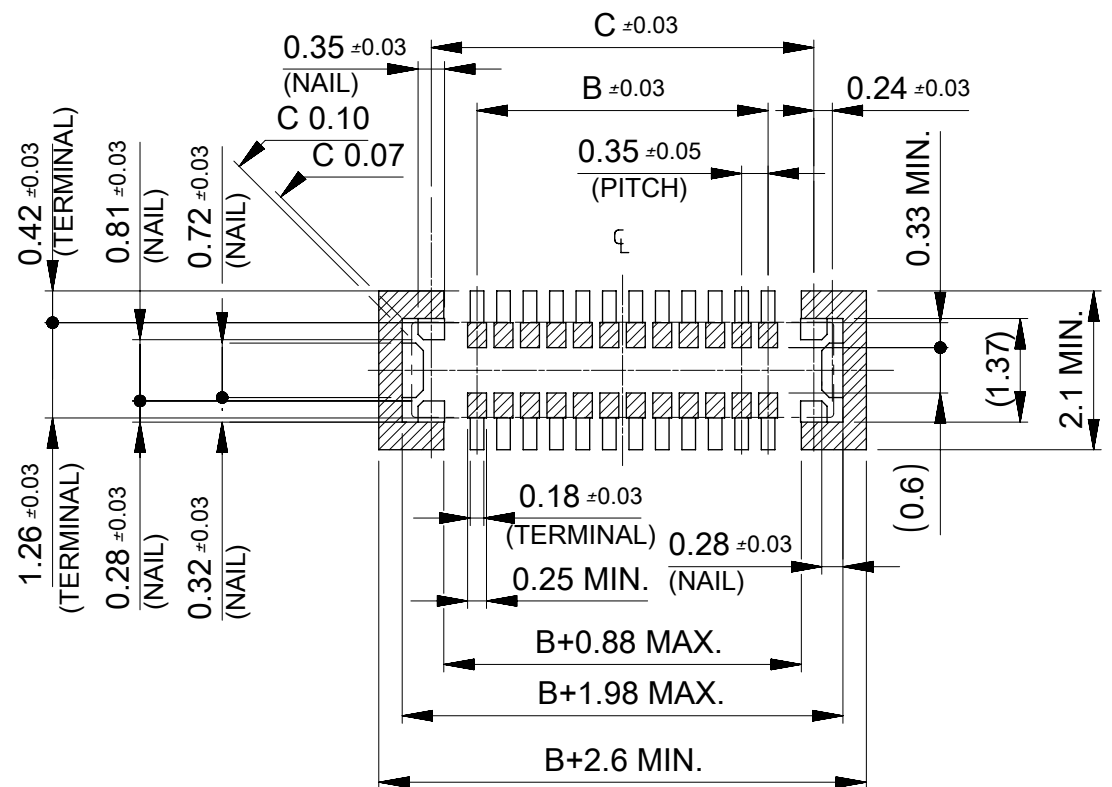

RECOMMENDED P.W.BOARD PATTERN LAYOUT (REFERENCE)

SOLDERING PROHIBITED AREA.
WHEN WIRING IS LOCATED,
THE WIRING MUST BE MASKED BY COVER LAY OR RESIST FILM.

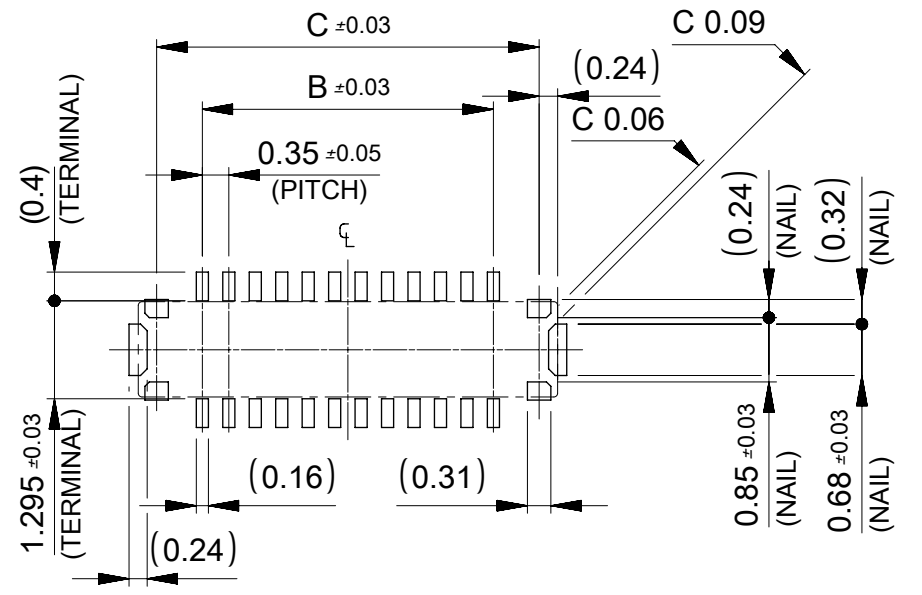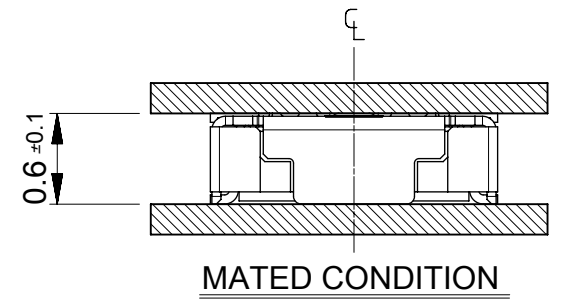

RECOMMENDED METAL MASK LAYOUT (REFERENCE)

RECOMMENDED THICKNESS OF METAL MASK : $t=0.08\text{mm}$
RECOMMENDED OPEN APERTURE RATIO OF METAL MASK : 80%

SYMBOLS = 0 = 0 = 0 = 0 = 0 = 0 = 0 = 0 = 0 = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS: mm SCALE: 10:1	CURRENT REV DESC: RELEASED EC NO: 618378 DRWN: TNISHIDA02 2019/05/23 CHK'D: KTANAKA03 2019/06/03 APPR: RTAKEUCHI 2019/06/03	molex		
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 3.0° 4 PLACES ± 0.03 3 PLACES ± 0.03 2 PLACES ± 0.05 1 PLACE ± 0.1 0 PLACES ± 0.2	INITIAL REVISION: DRWN: TTANIGUCHI01 2018/11/01 APPR: RTAKEUCHI 2019/06/03	0.35 BB CONN. H=0.6 ICB6 PLUG ASSY		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIRD ANGLE PROJECTION DRAWING: A3-SIZE SERIES: 206807	PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 2068071000-SD DOC TYPE: PSD DOC PART: 000 REVISION: A	PRODUCT CUSTOMER DRAWING		
	MATERIAL NUMBER: SEE CHART CUSTOMER: GENERAL SHEET NUMBER: 2 OF 2				