

ILONA-ZOOM

An infinitely adjustable beam from 13 to 48 degrees.

SPECIFICATION:

Dimensions	Ø 52.5 mm
Height	33.2 mm
Fastening	socket
ROHS compliant	yes 🕕



MATERIALS:

Component	Туре	Material	Colour	Finish
C17296_ILONA-ZOOM-SUB	Single lens	PMMA	clear	
C17295 II ONA-ZOOM	Single lens	PMMA	clear	

ORDERING INFORMATION:


Quantities for one set:

Single lens 2




PRODUCT DATASHEET ILONA-ZOOM

Component		Qty in box	MOQ	MPQ	Box weight (kg)
C17295_ILONA-ZOOM » Box size: 480 x 280 x 300 mm	Single lens	264	33	33	9.7
C17296_ILONA-ZOOM-SUB » Box size: 480 x 280 x 185 mm	Single lens	264	33	33	2.4

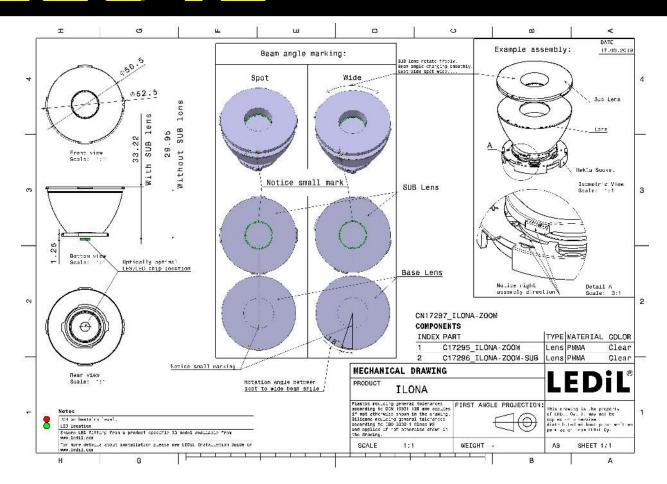


See also our general installation guide: www.ledil.com/installation_guide




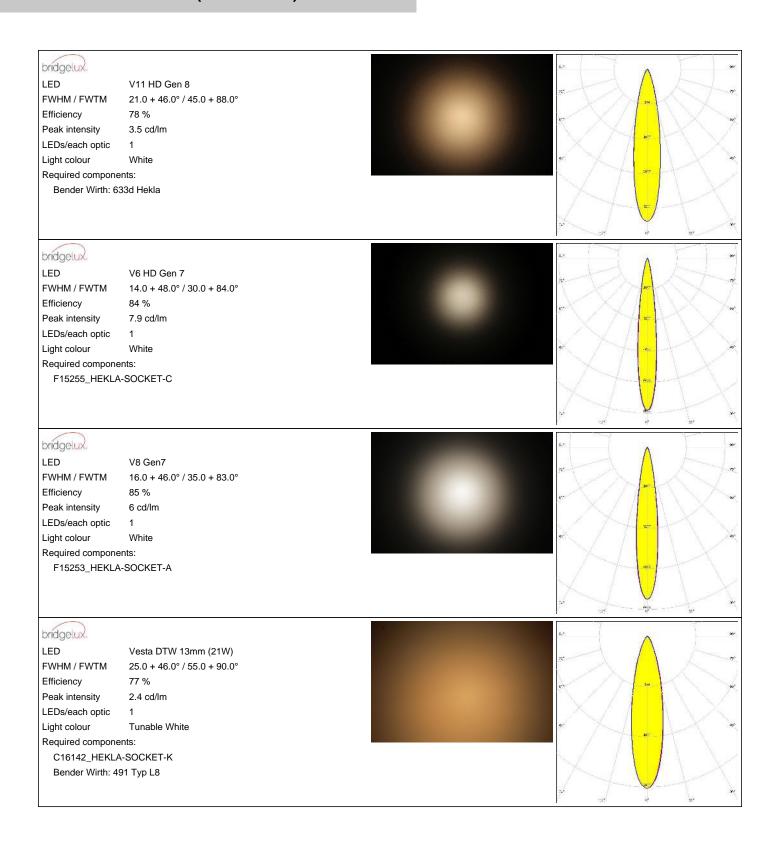




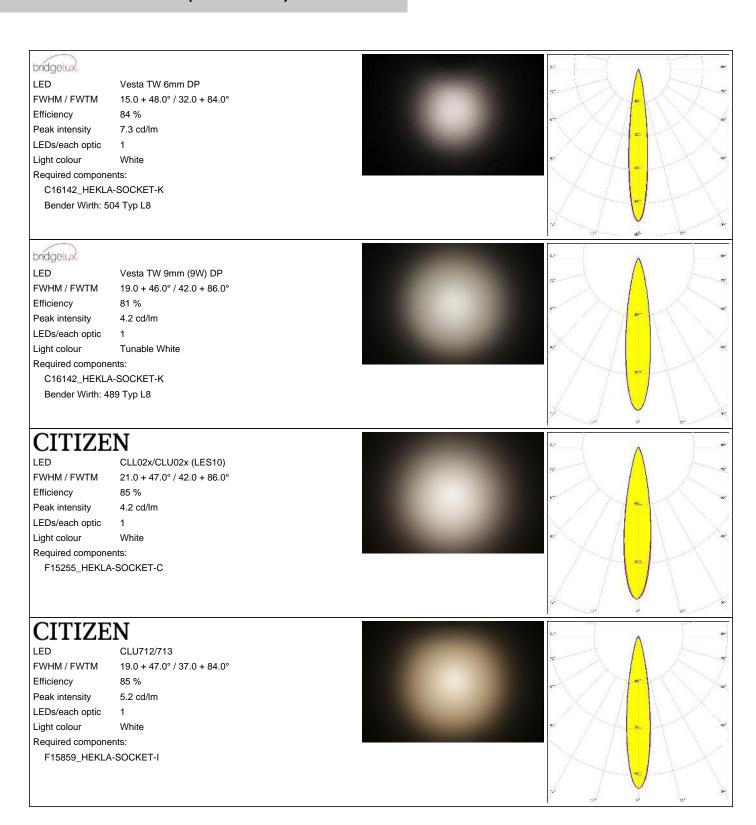




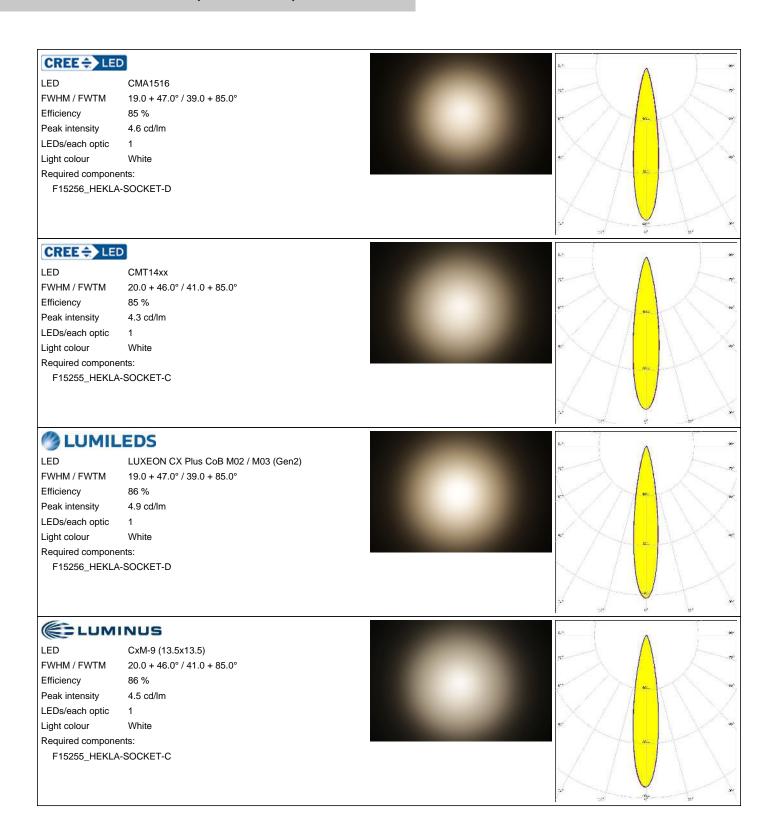



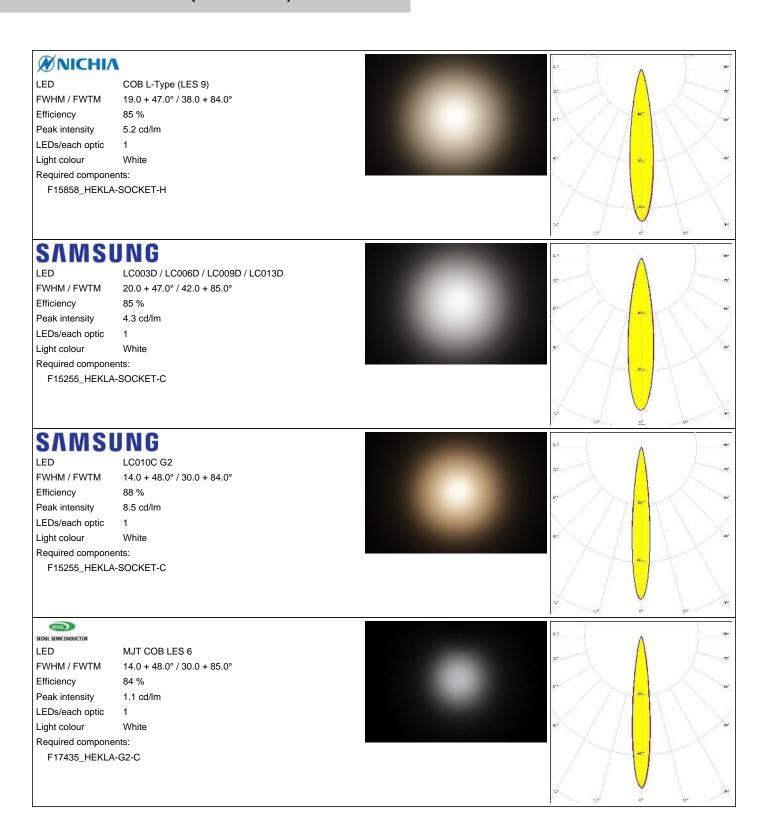



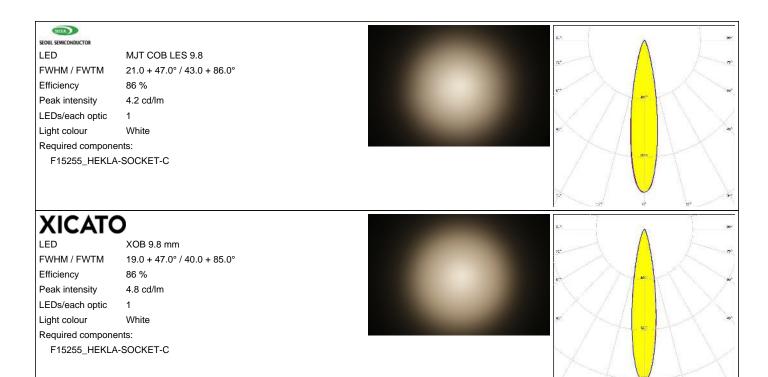



bridgelux

LED V4 HD Gen 7


FWHM / FWTM $12.0 + 46.0^{\circ} / 25.0 + 76.0^{\circ}$

Efficiency 82 % Peak intensity 12.3 cd/lm LEDs/each optic

Light colour White

Required components:

F15253_HEKLA-SOCKET-A



bridgelux.


LED V9 HD Gen7

FWHM / FWTM 18.0 + 46.0° / 34.0 + 82.0°

Efficiency 88 % Peak intensity 6.2 cd/lm LEDs/each optic 1 White Light colour

Required components:

F15859_HEKLA-SOCKET-I



bridgelux


LED Vesta DTW 9mm (4W/6W/12W)

FWHM / FWTM $18.0 + 46.0^{\circ} / 36.0 + 84.0^{\circ}$

Efficiency 86 % Peak intensity 5.5 cd/lm LEDs/each optic Light colour White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8




CITIZEN

CLL03x/CLU03x

FWHM / FWTM 25.0 + 46.0° / 51.0 + 92.0°

Efficiency 85 % Peak intensity 2.8 cd/lm LEDs/each optic White Light colour Required components:

F15859_HEKLA-SOCKET-I





CITIZEN


CLU700/701/702/703

FWHM / FWTM 13.0 + 47.0° / 27.0 + 78.0°

Efficiency 82 % Peak intensity 10 cd/lm LEDs/each optic Light colour White

Required components:

F15255_HEKLA-SOCKET-C




CITIZEN

LED CLU7A2/7A3

FWHM / FWTM 13.0 + 48.0° / 26.0 + 83.0°

Efficiency 88 % Peak intensity 10.1 cd/lm LEDs/each optic 1 White Light colour Required components:

F15255_HEKLA-SOCKET-C



CREE + LED


LED CXA/B 13xx

FWHM / FWTM $14.0 + 47.0^{\circ} / 28.0 + 80.0^{\circ}$

Efficiency 90 % Peak intensity 9.6 cd/lm LEDs/each optic Light colour White

Required components:

F15956_HEKLA-SOCKET-J



CREE & LED


CXA/B 15xx

FWHM / FWTM 18.0 + 46.0° / 36.0 + 81.0°

Efficiency 89 % Peak intensity 5.5 cd/lm LEDs/each optic White Light colour

F15256_HEKLA-SOCKET-D

Required components:








LED LUXEON CoB 1202/1203 FWHM / FWTM 20.0 + 44.0° / 37.0 + 80.0°

Efficiency 87 %
Peak intensity 5.3 cd/lm
LEDs/each optic 1

Light colour White Required components: F17437_HEKLA-G2-H




MUMILEDS

LED LUXEON CoB 1204/1205 FWHM / FWTM 24.0 + 46.0° / 50.0 + 95.0°

Efficiency 85 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 437 Typ L8




ELUMINUS

LED CxM-6 (13.5x13.5) FWHM / FWTM 14.0 + 46.0° / 30.0 + 81.0°

Efficiency 90 %
Peak intensity 8.6 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C




WNICHIA

LED COB S-Type (LES 7)
FWHM / FWTM 16.0 + 48.0° / 30.0 + 80.0°

Efficiency 89 %
Peak intensity 7.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15848_HEKLA-SOCKET-G






WNICHIA

LED NCSxE17A

FWHM / FWTM 13.0 + 47.0° / 27.0 + 75.0°

Efficiency 88 %
Peak intensity 10 cd/lm
LEDs/each optic 7
Light colour White

Required components:




SAMSUNG

LED LC010T (Tunable White) FWHM / FWTM 18.0 + 46.0° / 34.0 + 83.0°

Efficiency 88 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8




SAMSUNG

LED LC020C

FWHM / FWTM 14.0 + 46.0° / 28.0 + 77.0°

Efficiency 88 %
Peak intensity 9.2 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I



SAMSUNG


LED LC020T (Tunable white)

FWHM / FWTM 22.0 + 46.0° / 42.0 + 85.0°

Efficiency 86 %
Peak intensity 4.1 cd/lm
LEDs/each optic 1
Light colour White

C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

Required components:





TRIDONIC


LED SLE G7 LES13

FWHM / FWTM 12.0 + 45.0° / 21.0 + 71.0°

Efficiency 88 %
Peak intensity 16.3 cd/lm

LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I





GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

14/14

www.ledil.com/ where_to_buy