
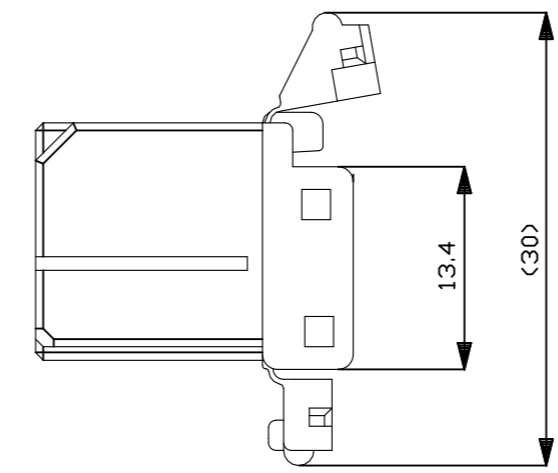
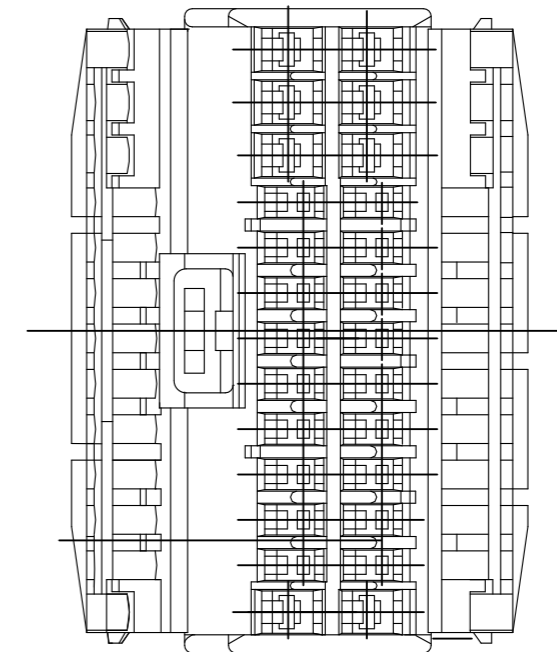
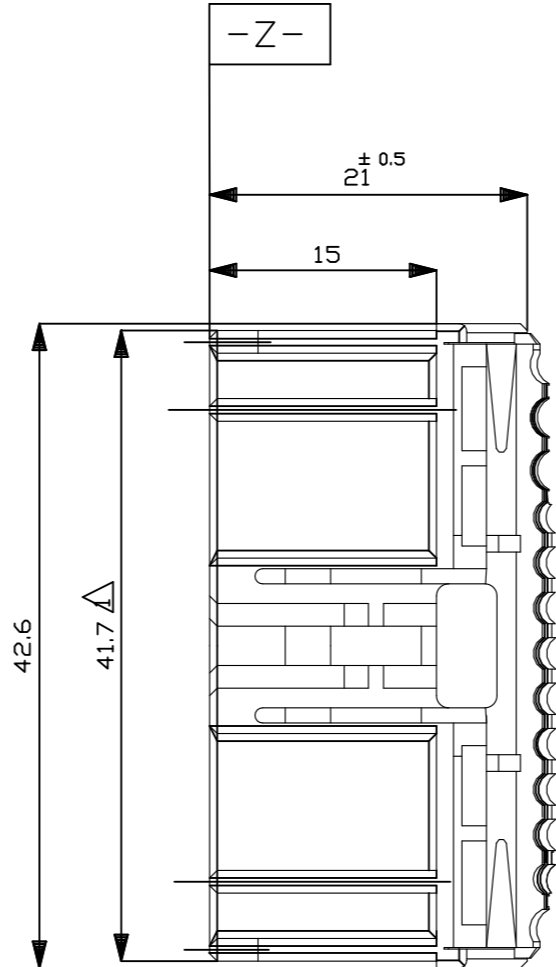


P	LTR	DESCRIPTION	DATE	DWN	APVD
C1		REVISED PER ECR-23-165252	01FEB2023	RK	MT

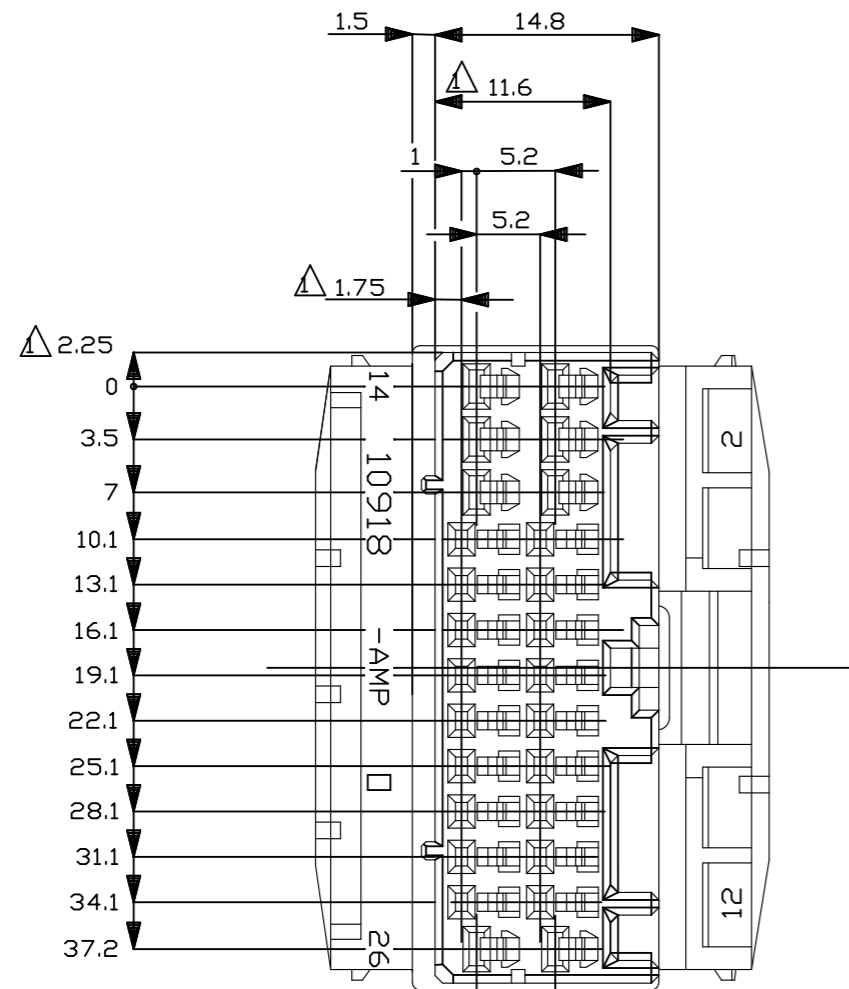

NOTE:

- 1  $\Delta$  MUST BE KEPT BETWEEN  $-Z-$  AND 2mm
- 2 THE MATING CAP HSG PART NUMBER;176206
- 3 APPLIED CONTACT : P/N 173716,173630,173631

注:

- 1  $\Delta$   $-Z-$  面より2mmの範囲で測定
- 2 嵌合相手ハウジング型番:176206
- 3 内装するリセプタクルコンタクト型番:173716,173630,173631

OBSOLETE	灰色 (LIGHT GRAY)	6-176204-6
	白色 (WHITE)	176204-1
	色 (COLOR)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SUZUKI 6/19'89	TE Connectivity 26pos.PLUG HOUSING .040/.070SERIES HYBRID I/O CONN.				
DIMENSIONS: mm		CHK A.MATSUSAKA 6/19'89				APVD -	
		PRODUCT SPEC -					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC -					
MATERIAL PBT		FINISH -	WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-176204	RESTRICTED TO -
GENERAL TOLERANCE 0 < * ≤ 10 : ±0.2 10 < * ≤ 30 : ±0.25 30 < * ≤ 100 : ±0.3 ANGLES : ±3°			CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV C1